IMPLEMENTATION OF AN EXCITATION ANALYZER FOR A SPEECH ANALYSIS/SYNTHESIS SYSTEM

A Thesis Submitted
In Partial Fulfilment of the Requirements
for the Degree of
MASTER OF TECHNOLOGY

By
CAPT. CVSS SATISH

to the

DEPARTMENT OF ELECTRICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY, KANPUR
MARCH, 1985

EE-1985-M-SAT-IMP

CERTIFICATE

This is to certify that the thesis entitled 'IMPLEMENTATION OF AN EXCITATION ANALYZER FOR A SPEECH ANALYSIS-SYNTHESIS SYSTEM' submitted by Capt. CVSS Satish, Roll No. 8310448, for the partial fulfilment of the requirements for the award of M.Tech. degree, has been carried out under our supervision. To the best of our knowledge, it has not been submitted elsewhere for an award of a degree.

(P.K. Chatterjee)
Professor
Dept. of Electrical Engg.
Indian Institute of Technology
Kanpur

(K.R. Srivathsan)
Assistant Professor)
Dept. of Electrical Engg.
Indian Institute of Technology
Kanpur

1/3/05

ACKNOWLEDGEMENTS

I am truly grateful to Dr. K.R. Srivathsan and Dr. P.K. Chatterjee for their guidance in the completion of this thesis.

Dr. Srivathsan, in particular, has taken a lot of trouble in ironing out the hardware kinks whenever they occurred.

Thanks are due to all the occupants of the 3rd Floor, ACES for their excellent company and the congenial atmosphere prevalent. REs Prem Malhotra and GNMS Sudhakar have rendered a lot of help in making my passage smooth. Brain storming sessions with Nandi and Mukund were invaluable.

Mr. R.N. Srivastava must get all the credit for his typing effort and the trouble he has taken to decipher my scrawl.

CVSS Satish
Captain

ABSTRACT

Various schemes for digital processing of speech signals is reviewed. Those schemes employing parametric analysis of speech data, viz., the vocal tract and excitation functions, provide for efficient coding and data rate compression.

An LPC analysis/synthesis system is taken up in detail and its hardware implementation is suggested. This scheme consists of two parts — a pitch period estimator and an LPC analyzer.

An excitation analyser needed to obtain the pitch period estimates of a speech signal is implemented. This implementation uses a special purpose, signal processing microcomputer, the Intel 2920. Signal processing functions such as digital Lerner filters, peak detectors and run down circuits are implemented on this processor. The pitch estimates and voiced/unvoiced decisions are made using the Parallel Processing method of Gold and Rabiner. An 8085 microprocessor is used for the final computation of the pitch period from parallel estimates in an interrupt service routine. The estimator does provide fairly accurate results.

CONTENTS

CHAPTER 1

SPEECH PROCESSING

1.1 INTRODUCTION

Digital processing of speech has been an active subject of study for several decades. It has acquired added importance with digital transmission of speech and secure communications. The attraction has resulted from the wide variety of applications from communications to automatic reading machines [1]. In this thesis various speech analysis systems have been discussed briefly. In detail, is available the implementation of a pitch period estimator, which forms an important part of any speech analysis-synthesis system.

1.2 SPEECH PROCESSING

Speech processing problems fall broadly into three classes depending on application [3, 4].

a) Speech analysis - for such applications as
   - speech recognition
   - speaker identification
   - speaker verification

b) speech synthesis - for application in
   - automatic reading machines
   - data retrieval, verbally, from a computer as when a data base is to be interrogated from an ordinary telephone.

c) Analysis followed by synthesis - for voice communication uses with the aim of

- secure voice transmission
- data rate compression of speech.

It is this third class of problems that this work addresses itself to.

1.3 RATE COMPRESSION OF SPEECH

By simply sampling and digitising speech we have a rate of the order of 64 K bits/sec. However, through the use of speech analysis followed by appropriate coding at the transmission end and resynthesis at the receiver, this can be reduced by a factor between 10 and 50. The reduction factor depends on the type of system used and the speech quality [3] desired. Intelligible speech can be communicated at as low as 2.5 K bits/sec. For accommodating nuances of speech such as inflection, tone and auditory hints to the speakers identity, which are desirable in human communications, higher data rates must be used to accommodate this information.

1.4 SPEECH PROCESSING TECHNIQUES

The techniques available for speech processing are broadly divided into two classes:

(a) Waveform coding methods

(b) Methods based on the structure of speech.

1.4.1 Waveform Coding

In waveform coding methods [2] the only assumption made is that the signal is bandlimited. This class can in general be applied to any bandlimited time function. These are the PCM, DPCM and DM techniques. If adaptive quantizers are incorporated in these, we have the APCM, ADPCM and ADM with better performance at a higher cost. Mention may also be made of the LDM (linear delta modulation), CDM (continuous DM) and the DCDM (digitally controlled DM). In all, these techniques provide higher SNR at data rates of 30 to 50 K bits/sec. The perceptual speech quality is dependent on the quantisation technique and the number of bits per sample. A study [2, 4] shows that objective ratings, based on SNR considerations and subjective ratings based on listener preferences can vary, as shown in Figure 1.1.

Here it is evident that transmission rates between 24 to 56 K bits/sec are needed for a sample rate of 8 KHz, to obtain a reasonable quality of speech.

1.4.2 Parametric Coding

This class of techniques is tailored for the speech waveform in the sense that they capitalise on its structure, when represented by a model consisting of a slowly varying linear system excited by an appropriate excitation signal. To mention a few of the methods [1, 3, 4] in this class we have the Linear Predictive Coding (LPC), Homomorphic filtering and Formant analysis. These methods are attractive

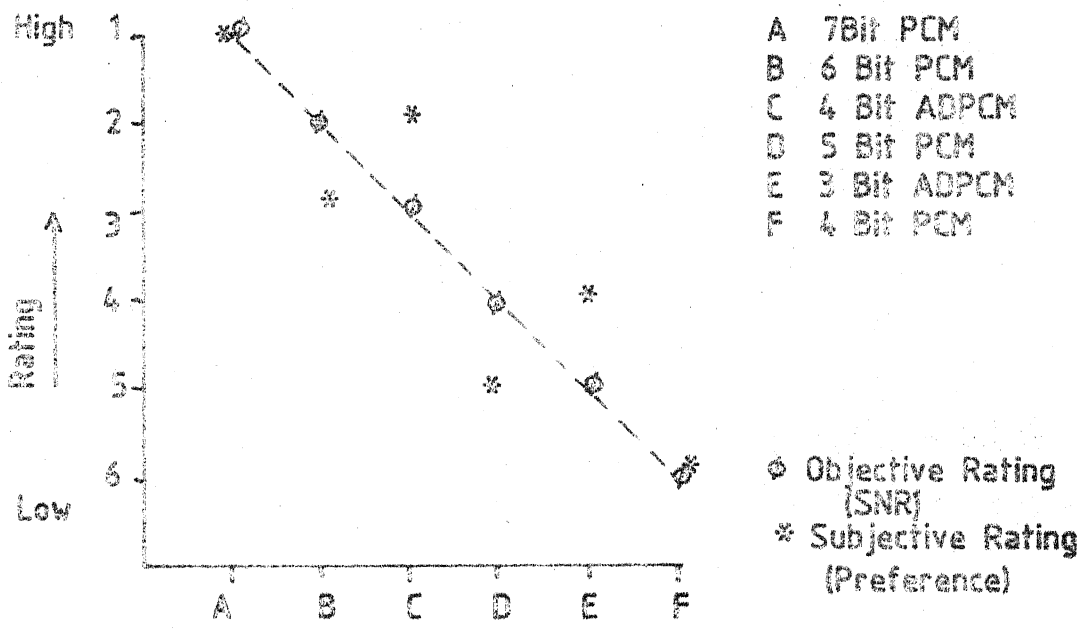

Fig 1.1 Comparison of Objective and Subjective Performance of ADPCM and log PCM

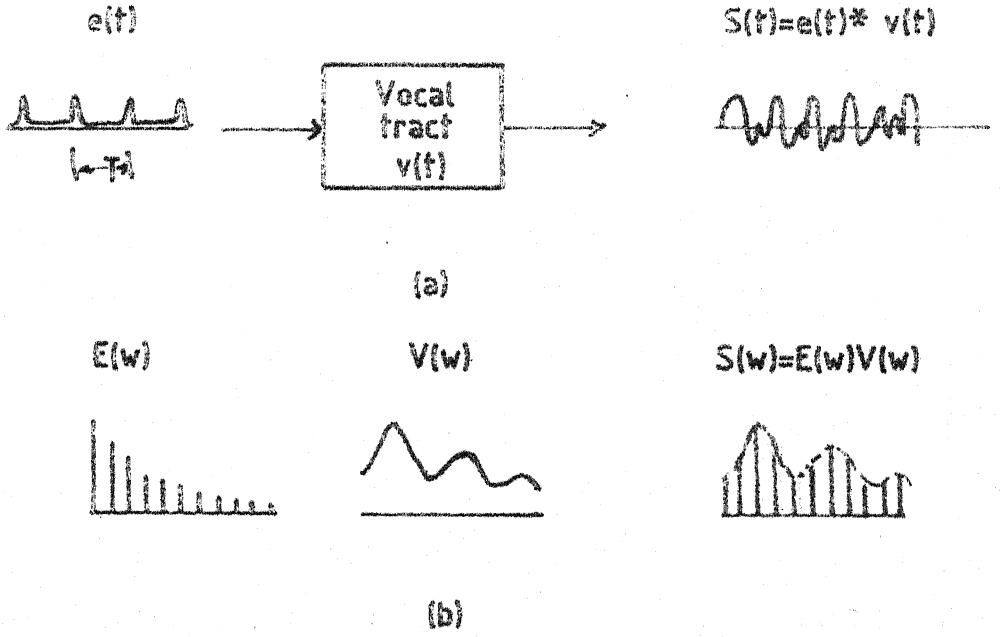

Fig 1.2 Model of speech production

(a) Time domain characterisation
(b) Frequency domain "

since they offer lower bit rates by transmitting only the speech parameters rather than the actual waveform itself. These are discussed in the next chapter.

1.5 MODEL OF SPEECH WAVEFORMS

The second class of techniques for speech analysis and synthesis can be viewed in terms of a model of the speech waveform as the response of a slowly time varying system to either a periodic or noiselike excitation.

1.5.1 The Speech Mechanism

The speech mechanism essentially consists of:

(a) The vocal tract which is an acoustic tube with non uniform cross sectional area, ranging from the vocal chord constriction at the mouth of the trachea to the lip at the other end. During speech the vocal tract is deformed in cross sectional area by movement of the articulators namely, the lips, jaw, tongue and the velum (soft palate).

(b) The excitation source or, the source of energy for the speech production lies in the thoracic and abdominal musculatures. In the case of voiced speech sounds, the excitation corresponds to a quasi periodic pulse train, representing air flow through the vocal chords as they vibrate. The fricative sounds are generated by forcing air through a constriction in the vocal chords, creating turbulence which in turn produces a source of noise to excite the vocal tract [1].

As suggested in the preceding discussion, the speech waveform can be modelled as the response of a linear time varying system, the vocal tract, with the appropriate excitation.

Figure 1.2(a) shows that for a fixed vocal tract, the output of the system is the convolution of vocal tract and excitation impulse responses. The vocal tract changes for different sounds, and since this change is a slow one, the output can be approximated as a convolution on a short time basis.

1.6 SHORT TIME ANALYSIS AND SYNTHESIS OF SPEECH

1.6.1 Requirement of the Short Time Basis

Figure 1.2(b) shows the model in the frequency domain where the speech output is a composite spectrum of the product of a line spectrum (Fourier transform (FT) of the excitation for a voiced signal) and the FT of the vocal tract impulse response.

To generate different sounds, the vocal tract shape and hence the envelope of the output spectrum changes. Similarly, as the excitation period changes for voiced sounds, the spacing of the pitch harmonics will change.

Since both the components of the output product change, albeit slowly, with time, a short time analysis is desirable and meaningful.

Identically the short time basis is implied during synthesis for which purpose, periodic information of the

excitation and vocal tract parameters are adequate.

1.6.2 Duration of the "Short Time"

A natural question to follow at this stage is how short or long can the "short time" be. Many works in the area suggest that the time interval lie between 10 to 40 msec. Instinctively more accurate representation of analysed speech is better obtained at smaller intervals. However, subjective listener tests [1, 5] indicate a wide variance depending upon the analysis-synthesis methods used. Once again desired speech quality can determine the duration of the "short time", along with the restrictions imposed by the method of analysis-synthesis in consideration.

1.7 THESIS OUTLINE

The region of study is the Parametric coding methods. In this thesis an attempt to study the hardware implementation of one type of Parametric coding technique is made.

Chapter 2 introduces and reviews the various types of analysis-synthesis methods available and their implementation in vocoders.

Chapter 3 mentions available schemes for the extraction of the excitation parameter, or pitch period, at block diagram level. The Parallel Processing Algorithm of Gold and Rabiner [6] is discussed along with the modification chosen for implementation.

Chapter 4 covers in detail the hardware and software for the implementation of the Parallel processing pitch

period estimation algorithm.

Chapter 5 contains suggestions for improvement of the implemented design and also a scheme for the realisation of a complete LPC vocoder.

Appendix A contains the hardware details.

Appendix B contains printouts of software programmed on to the 2920 Signal Processing Chip.

Appendix C has the printout of the 8085 program used for final computation of the pitch period.

Appendix D contains notes on the use of 2920 Signal Processor and Software Application Package.

CHAPTER 2

REVIEW OF SPEECH ANALYSIS SYNTHESIS SYSTEMS

2.1 SPEECH ANALYSIS-SYNTHESIS SYSTEMS

To capitalise on the model of speech presented in Chapter 1, most analysis-synthesis methods attempt, in one way or another, to deconvolve the speech signal to achieve separation of the vocal tract characteristics from the excitation function. Such systems lead to significant data rate compression for speech storage or transmission at the cost of quality. This results from the fact that the deconvolution cannot be precisely implemented [3]. Several methods of analysis are available for implementation in speech processing systems. The synthesis can then be performed in one of the synthesizers available.

2.2 ANALYSIS TECHNIQUES

A variety of analysis methods are possible based on the output of a slowly varying linear system. Those of interest are

a) Short time autocorrelation analysis [11]

b) Short time Fourier analysis [3, 4, 11]

c) Homomorphic analysis [3, 4, 9, 11]

d) Formant analysis [1, 14]

e) Analysis by linear prediction [5, 12, 15]

2.2.1 Short Time Autocorrelation Analysis

This is a time domain analysis method wherein the utility of the autocorrelation function in displaying structure in any waveform is employed.

The autocorrelation function of a discrete time signal $x(n)$ is defined as

$$\phi(m) = \lim_{N \to \infty} \frac{1}{2N+1} \sum_{n=-N}^{N} x(n)\, x(n+m) \qquad (2.1)$$

If the signal is periodic with period p i.e. $x(n+p) = x(n)$ for all n, then it is easily shown that

$$\phi(m) = \phi(m+p) \qquad (2.2)$$

Thus periodicity in the autocorrelation function indicates periodicity in the signal. A lack of predictable structure in a signal is indicated by an autocorrelation function sharply peaked at $m = 0$ and falling off rapidly as m increases.

Using the notion of short time analysis to operate on short segments of the speech signal, the short time autocorrelation function can be defined as

$$\phi_l(m) = \frac{1}{N} \sum_{n=o}^{N'-1} x_l(n)\, x_l(n+m), \qquad 0 \leq m \leq M_o - 1 \qquad (2.3)$$

where N = number of samples of a segment

l = beginning of the segment

M_o = maximum lag of interest and is >P if periodicity is to be observed.

If $N' = N$, then data from outside the segment $1 \leq n \leq N + l - 1$ is used in computation.

If $N' = N - m$, then data from that interval only is required and the segment is often weighted by a "window" function that smoothly tapers the ends of the segment to zero. Either choice is satisfactory to detect periodicity in the speech.

The direct computation of $\phi_l(m)$ for $0 \leq m \leq M_o - 1$ requires computational effort proportional to M_o X N, which can be a significant overhead.

The estimate of the autocorrelation is generally based upon 20 to 40 millisecond segments, making allowance that the window must be long enough to encompass at least two periods of the speech signal.

2.2.2 Short Time Fourier Analysis

This spectral analysis method is classic to the approach of obtaining the vocal tract transfer function. Speech is a quasi-stationary process and may be considered stationary for adequately short segments. Therefore the FT of a short segment of speech provides a good spectral representation of it during that interval.

Figure 2.1 shows a simple way of implementing a short time spectral analyzer. The implementation involves using a bank of bandpass filters. Choosing the filter passbands to cover the speech band, the outputs can be thought of as a Fourier representation of the speech

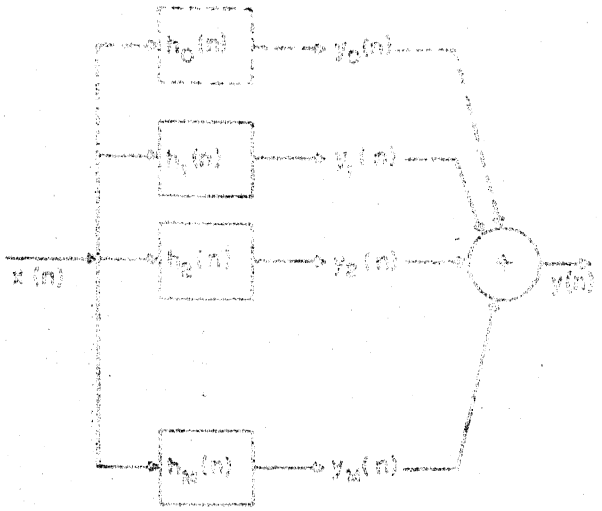

Fig. 2.1 A bank of bandpass filters.

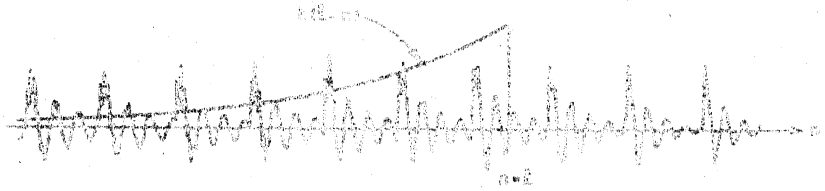

Fig 2.2 Illustration of computation of the short-time Fourier transform.

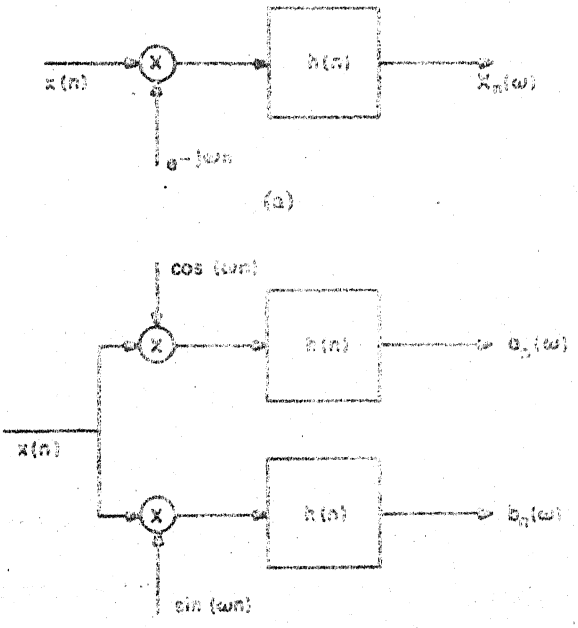

Fig. 2.3 Short-time Fourier analysis and synthesis for one channel centered at ω.

signal. With carefully designed filters, the sum of all outputs will be a good approximation to the original speech signal.

The discrete short time spectrum of x(n) is defined as

$$X_l(w) = \sum_{n=-\infty}^{l} x(n)\, h(l - n)\, e^{-jwn} \qquad (2.4a)$$

$$= |X_l(w)|\, e^{j\theta_l(w)} \qquad (2.4b)$$

$$= a_l(w) - j\, b_l(w) \qquad (2.4c)$$

Two basic interpretations can be made from equation (2.4a):

(a) $X_l(w)$ may be viewed as the FT of the sequence x(n) weighted by a window h(l - n) as in Figure 2.2.

(b) The second interpretation follows the assumption that h(x) be the impulse response of a low pass digital filter. Assuming that it is desired to evaluate the short time transform at frequency w, from Figure 2.3(a) $X_n(w)$ is the output of a low-pass filter with input $x(n)e^{-jwn}$. The depiction in Figure 2.3(b) avoids complex arithmetic and the output parameters obtained i.e. $a_n(w)$ and $b_n(w)$, are the real and imaginary parts of the spectrum respectively.

The choice of bandwidth of the bandpass filters of Figure 2.2 is discussed in Section 2.5.1 where the implementation of the short time spectral analysis is realised in the channel vocoder.

The short time spectral analysis may be performed using a FFT algorithm. When implemented on a computer, the FFT method is generally superior to the bank of filters model.

2.2.3 Homomorphic Analysis

Homomorphic filtering is a class of non linear signal processing techniques that is based on a generalisation of the principle of superposition that defines linear systems [3]. It is a tool used to separate signals that have been non additively combined. Hence it serves to deconvolve the vocal tract and excitation functions.

The basic operations of such an analyzer are depicted in Figure 2.4(a). The signal at A is taken as a discrete convolution of the excitation and vocal tract impulse response. B is the result obtained by using a FFT and is the product of the FTs of vocal tract and impulse response. C is logarithm of the magnitude of the FT and is the sum of the logarithms of the excitation and vocal tract responses. Since the inverse DFT performed is linear, the result at D (called the cepstrum of input at A) is an additive combination of cepstra of the excitation and vocal tract components. Thus we have approximately transformed convolution to addition.

The cepstrum (D) serves as an excellent basis for estimating the fundamental period of voiced speech and for determining whether a particular speech segment is voiced or unvoiced [13].

The vocal tract transfer function, or the spectrum envelope, can be obtained by removing the rapidly varying

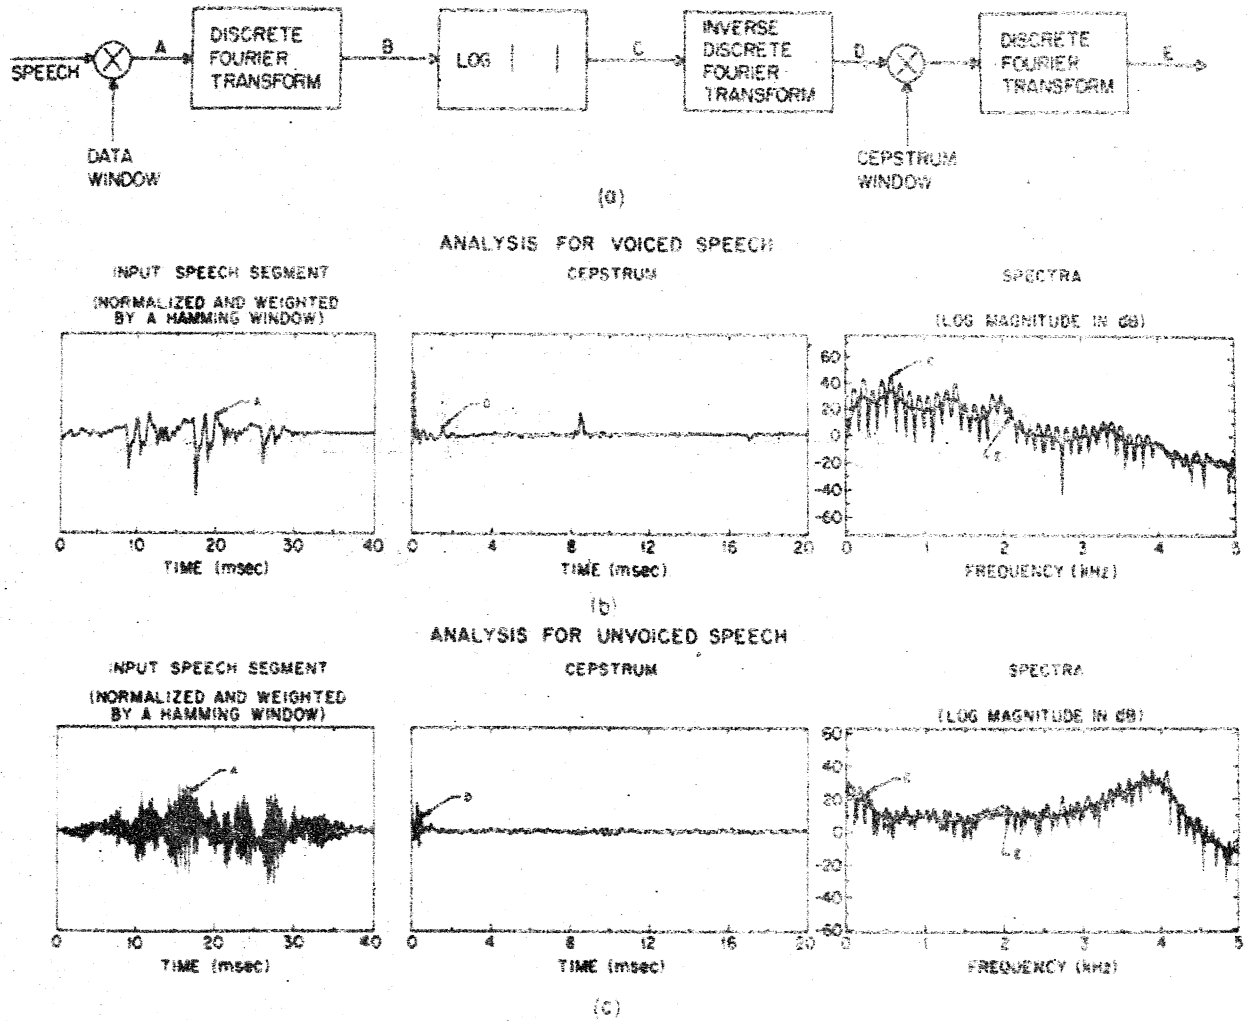

Fig. 2.4 Homomorphic processing of speech. (a) Basic operations. (b) Analysis for voiced speech. (c) Analysis for unvoiced speech.

components of the log magnitude spectrum by linear filtering. One method is to multiply the cepstrum at D by a window that only passes the short time components and then computing the DFT resulting in E (Figure 2.4(b) and (c) for voiced and unvoiced speech segments).

2.2.4 Formant Analysis

This method devolves around a time-frequency-intensity display of the short time spectrum of speech known as a "speech spectrogram". The vocal tract has resonances for voiced speech. The formant frequency is the frequency of the maximum of a gross concentration of energy in the spectrum of a speech sound. Fig. 2.4(d) is one such spectogram. A wide band spectogram is preferred over a narrow band one [3, 7] since time resolution is relatively high and, in fact, the individual periods of the time waveform are evident. During voiced intervals the vocal tract resonances appear clearly as dark bands in the spectogram.

Formant analysis consists of a system which accepts speech as an input and yields output voltages whose magnitudes, as functions of time, represent the frequencies of the formants. During the silent and unvoiced intervals of speech utterences the output voltages should be extrapolated continuously [14].

Such formant extraction is put to use in the terminal analog synthesiser. It also provides an interesting tool for clinical and therapeutical speech work. A large number of schemes have therefore been deviced for formant

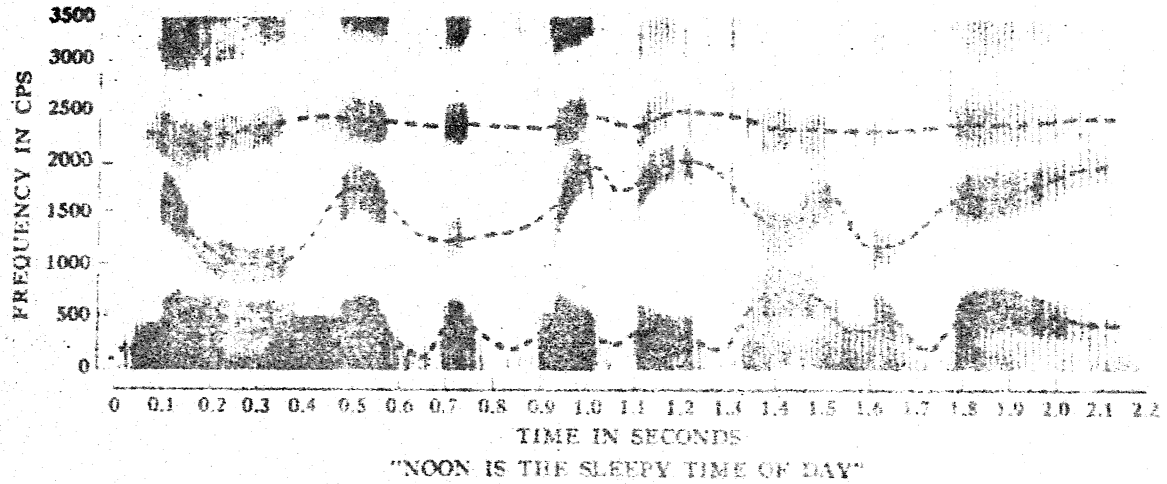

Fig 2.4(d) A Spectogram of an utterance

frequency extraction, including by linear predictive analysis [5].

2.2.5 Analysis by Linear Prediction

An alternative to the above methods is an approach based on estimating parameters of a vocal tract model. One such representation is in terms of a general rational transfer function of the form

$$H(Z) = G \frac{1 + \sum_{l=1}^{q} b_l Z^{-l}}{1 - \sum_{k=1}^{p} a_k Z^{-k}} \qquad (2.5)$$

A speech segment is sufficiently complex that it cannot be expected to match exactly the above model of equation (2.5). Much less, will be the matching to simplified all pole or all zero models. However, since a vocal tract transfer function is primarily characterised by resonances, it is fairly reasonable that an all pole model will preserve the important characteristics of the vocal tract transfer function. Such an all pole, i.e. Autro Regressive, modelling technique is called "Linear Prediction" [3, 5, 11, 12, 15].

A simplified modelling on this basis is illustrated in Figure 2.5.

Consider that the time varying filter of Figure 2.5 has a steady state system function of the form

$$H(Z) = \frac{X(Z)}{U(Z)} = \frac{G}{1 - \sum_{k=1}^{p} a_k Z^{-k}} \qquad (2.6)$$

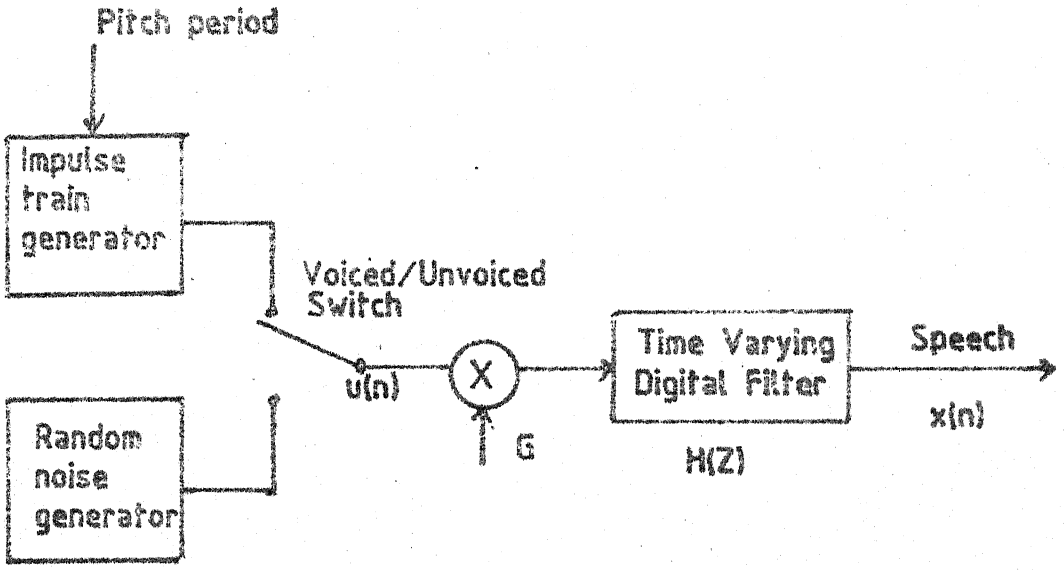

Fig 2.5 Block Diagram of a simplified model for speech production

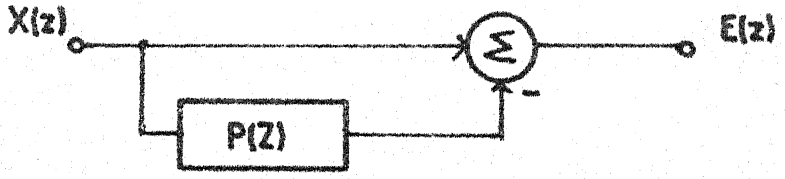

Fig 2.6 Linear Prediction model

where $$X(Z) = \sum_{x=-\infty}^{\infty} x_n Z^{-n} \qquad (2.7)$$

The speech samples x(n) are related to the excitation u(n) by the difference equation

$$x(n) = \sum_{k=1}^{p} a_k x(n-k) + G\,u(n) \qquad (2.8)$$

where G is the gain factor.

Define a linear predictor system (as in Figure 2.6) with predictor coefficients α_k, as a system whose output is

$$\hat{x}(n) = \sum_{k=1}^{p} \alpha_k x(n-k) \qquad (2.9)$$

The system function of the pth order linear predictor is the polynomial

$$P(Z) = \sum_{k=1}^{p} \alpha_k Z^{-k} \qquad (2.10)$$

The prediction error, e(n) is defined as

$$e(n) = x(n) - \hat{x}(n) = x(n) - \sum_{k=1}^{p} \alpha_k x(n-k) \qquad (2.11)$$

From equation (2.11) it is seen that the prediction error sequence is the output of a system whose transfer function is

$$A(z) = 1 - \sum_{k=1}^{p} \alpha_k Z^{-k} \qquad (2.12)$$

or $$A(z) = 1 - P(z) \qquad (2.13)$$

Thus the prediction error filter, A(z) will be an inverse filter for the system, H(z) of equation (2.6), i.e.

$$H(z) = \frac{G}{A(z)} \tag{2.14}$$

The basic problem of linear predictor analysis is to determine a set of predictor coefficients α_k in such a manner as to obtain a good estimate of the spectral properties of the speech signal through the use of equation (2.14). A basic approach is to find a set of predictor coefficients to minimise the mean square error over a short segment of speech. The resulting parameters are then assumed to be the parameters of the system function H(z) in the model of Figure 2.5.

The short time prediction error average is defined as

$$E_n = \sum_m e_n^2(m) \tag{2.15}$$

$$= \sum_m (x_n(m) - \hat{x}_n(m))^2 \tag{2.16}$$

$$= \sum_m \left(x_n(m) - \sum_{k=1}^{p} \alpha_k x_n(m-k) \right)^2 \tag{2.17}$$

where $x_n(m)$ is a segment of speech selected in the vicinity of sample n, and m is temporarily left unspecified.

The values α_k can be found so as to minimise E_n of equation (2.17), by setting

$$\partial E_n / \partial \alpha_i = 0 , \quad i = 1, 2, \ldots, p$$

thereby obtaining the set of equations

$$\sum_m x_n(m-i)\, x_n(m) = \sum_{k=1}^{p} \alpha_k \sum_m x_n(m-i)\, x_n(m-k)$$

$$1 \leq i \leq p \qquad (2.18)$$

From Equations (2.17) and (2.18) the minimum mean squared error can be shown to be

$$E_n = \sum_m x_n^2(m) - \sum_{k=1}^{p} \alpha_k \sum x_n(m)\, x_n(m-k) \qquad (2.19)$$

It is now time to specify the duration m. If m is considered finite then we obtain a cross correlation matrix for the coefficients of equation (2.19) which is called a covariance matrix and has its methods of solution [3, 5, 10].

However, we arrive at a simpler structured Toeplitz matrix if it is assumed that m is infinite and obtain the autocorrelation matrix for the coefficients of equation (2.19).

2.2.5.1 Autocorrelation method [4]

Here it is assume that m for equation (2.19) is infinite. Defining the autocorrelation of $x_n(m)$ as

$$R_n(i) = \sum_{m=-\infty}^{\infty} x_n(m)\, x_n(m-i) \qquad (2.20)$$

Equations (2.18) and (2.19) respectively reduce to

$$\sum_{k=1}^{p} \alpha_k R_n(i-k) = R_n(i), \quad 1 \leq i \leq p \qquad (2.21)$$

and $$E_n = R_n(o) + \sum_{k=1}^{p} \alpha_k R_n(k) \qquad (2.22)$$

Since the coefficients $R_n(i - k)$ of equation (2.21) form an autocorrelation matrix, we derive the "autocorrelation method".

In matrix form equation (2.21) can be expressed as

$$\begin{bmatrix} R_n(o) & R_n(1) & \dots & R_n(p-1) \\ R_n(1) & R_n(o) & \dots & R_n(p-2) \\ \vdots & \vdots & \vdots\vdots\vdots & \vdots \\ R_n(p-1) & R_n(p-2) & \dots & R_n(o) \end{bmatrix} \begin{bmatrix} 1 \\ 2 \\ \vdots \\ p \end{bmatrix} = \begin{bmatrix} R_n(1) \\ R_n(2) \\ \vdots \\ R_n(p) \end{bmatrix}$$

This pxp matrix is a Toeplitz matrix, the solution of which may be efficiently done by the Levinson Recursion as modified by Durbin [3, 4].

As an additional consideration, a Toeplitz matrix is guaranteed to be non singular and hence the resulting all pole filter. However, in order to implement the autocorrelation method for short time speech segments we use an appropriate window function w(n) so that another signal $x'_n(m)$, that is zero outside some interval $o \leq m \leq N-1$, is obtained. Then the autocorrelation method can be applied to this $x'_n(m)$.

2.3 DURBIN'S RECURSIVE SOLUTION

In the preceding section a Toeplitz matrix was obtained for the autocorrelation coefficients of equation (2.21). The procedure can be stated as follows:

$$E_n^{(o)} = R_n(o) \qquad (2.23)$$

$$k_i = \left[R_n(i) - \sum_{j=1}^{i-1} \alpha_j^{(i-1)} R_n(i-j) \,/E_n^{(i-1)}\right]$$

$$1 \leq i \leq p \qquad (2.24)$$

$$\alpha_i^{(i)} = k_i \qquad (2.25)$$

$$\alpha_j^{(i)} = \alpha_j^{(i-1)} - k_i \alpha_{i-j}^{(i-1)} \qquad 1 \leq j \leq i-1 \qquad (2.26)$$

$$E_n^{(i)} = (1 - k_i^2) E_n^{(i-1)} \qquad (2.27)$$

Equation (2.24) - (2.27) are solved recursively for $i = 1, 2, \ldots, p$ and the final solution is given as

$$\alpha_j = \alpha_j^{(p)} \qquad 1 \leq j \leq p \qquad (2.28)$$

It is observed that in the process of solving for the predictor coefficients of a predictor of order p, the solutions for coefficients for predictors of lesser order have been obtained.

Since, at each iteration, we obtain $E_n^{(i)}$, it is easy to examine the error as the order increases. The set of intermediate parameters k_i obtained are called "reflection coefficients" and, in fact, corresponds to the reflection coefficients at the boundaries between successive sections of an acoustic tube with sections of fixed length and varying cross sectional area.

2.4 SYNTHESIS METHODS

Except in the case of homomorphic and short time spectral analysis, two basic synthesizers are used for

synthesis of speech from the analysis information:

a) Terminal analog synthesizer

b) Acoustic tube analog synthesizer.

2.4.1 Terminal Analog Synthesizer

Such a synthesizer [1] is directed at implementing a system whose transfer function approximates the vocal tract transfer function, but whose implementation bears no direct relation to the details of a vocal tract. The representation is only from a terminal view point. The basis of implementation is that its transfer function can be approximated by a cascade combination of resonant circuits, each one representing one of the modes of the vocal tract. Hence this type of a synthesizer is also called a "formant synthesizer" and its general structure is depicted in Figure 2.7.

To correspond to changes in resonance due to change in the shape of the vocal tract, the resonant circuits are provided with a set of time varying parameters to control the centre frequency and bandwidth of the resonators. A source shaping filter provides appropriate spectral coloration when the excitation used for voiced speech is an impulse train and white noise for unvoiced speech. In addition, a filter that accounts for the effect of the coupling of the acoustic tube into space is required.

2.4.2 Acoustic Tube Analog Synthesizer

Figure 2.8 shows the representation of the vocal tract as an acoustic tube [1, 5] consisting of a set of

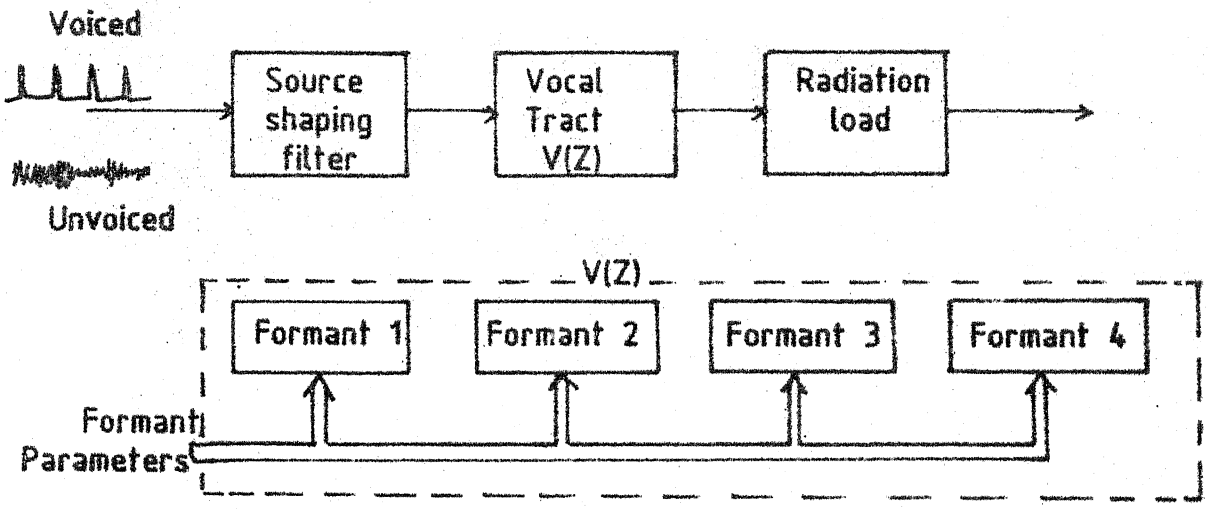

Fig. 2.7 Terminal Analog Synthesizer

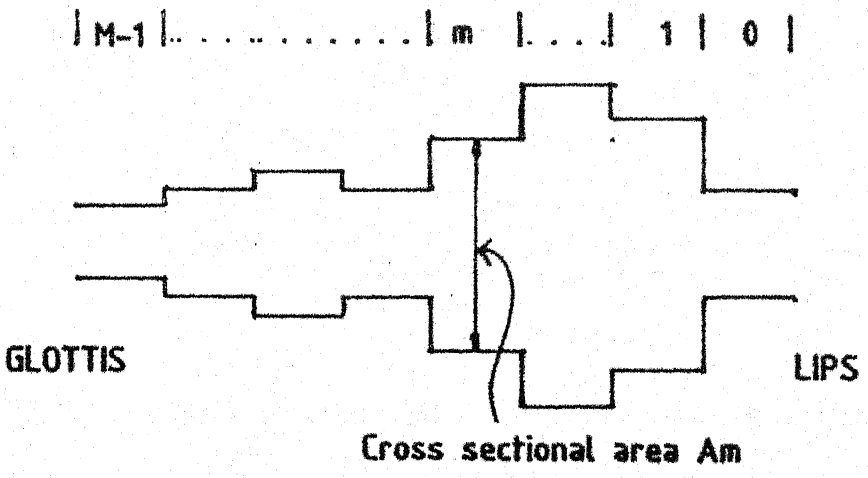

Fig. 2.8 Acoustic Tube model of the Vocal tract

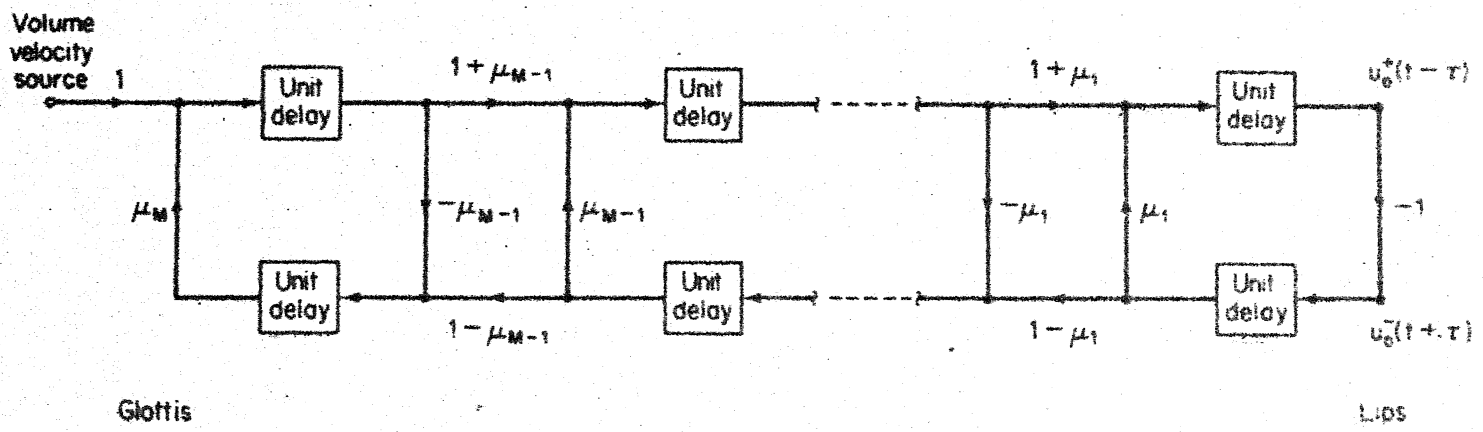

FIGURE 2.9 Linear signal-flow graph depicting the relationships between the forward and reverse traveling volume velocity waves throughout the acoustic tube model

interconnected sections of equal length and varying cross sectional area. The assumptions made are:

(a) The sound propagation through each section can be treated as a plane wave.

(b) The internal losses and the effect of the nasal tract and coupling between the vocal tract and the glottis can be ignored.

These assumptions permit an analysis of the acoustic tube model which leads to a filter structure whose variables are related to the physical variables of the tube. The end result is the linear flow graph structure of Figure 2.9. This flow graph depicts the relationships between the forward and reverse travelling volume velocity waves throughout the acoustic tube of Figure 2.8. The coefficients r_n, $n = 1, 2, \ldots, M-1$ are the reflection coefficients that characterise the sound produced at the lip end of the tube.

2.5 VOCODERS

Having seen the various analysis and synthesis methods available, vocoders based on these methods are reviewed at block diagram level.

a) Channel vocoder [17]

b) Homomorphic vocoder [3, 10, 11]

c) Vocoder based on Formant analysis [1, 14]

d) LPC vocoder [15, 18].

2.5.1 Channel Vocoder

The channel vocoder implements a short time spectral analysis on the speech segments as shown in Figure 2.10(a) and a synthesiser that is peculiar to this analysis method is shown in Figure 2.10(b). The filter bank method of analysis is used. It is pertinent to point out that these filter bands are desired to be wideband so as to yield a smoother spectrum (Figure 2.10(c)), since the wider filters average over several harmonics of the fundamental frequency.

The number of filters is generally between 16 and 20, and the low pass smoothing following rectification is chosen to suppress the pitch ripple of 50 Hz and higher while passing the vocal tract spectral changes [11]. The pitch may be detected by any one of the several methods in Chapter 3.

2.5.2 Homomorphic Vocoder

The analyser and synthesizer for a homomorphic vocoder are shown in Figure 2.11. Here again the synthesizer is peculiar to the analysis method used. The vocal tract transfer function V(nT) is obtained from the windowed cepstrum, as suggested earlier in Section 2.2.3. This is then convolved with the excitation parameters to obtain synthesised speech.

2.5.3 Vocoders Based on Formant Analysis

In Section 2.2.4 it has been shown how formant frequencies can be extracted from a speech segment. Studies

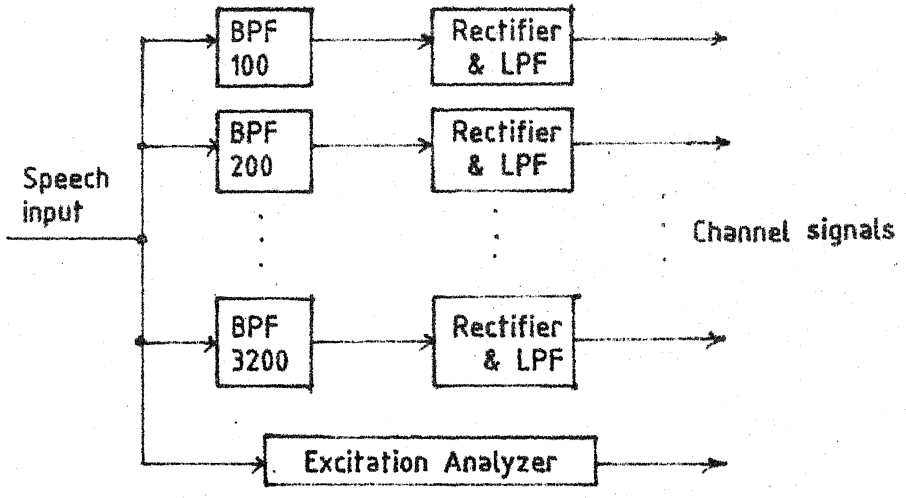

(a) Analyzer

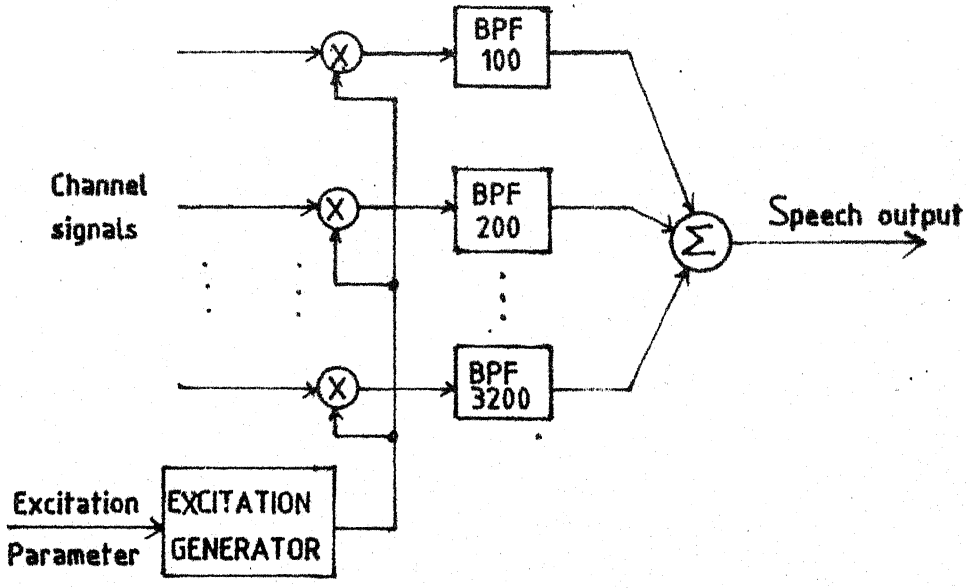

(b) Synthesizer

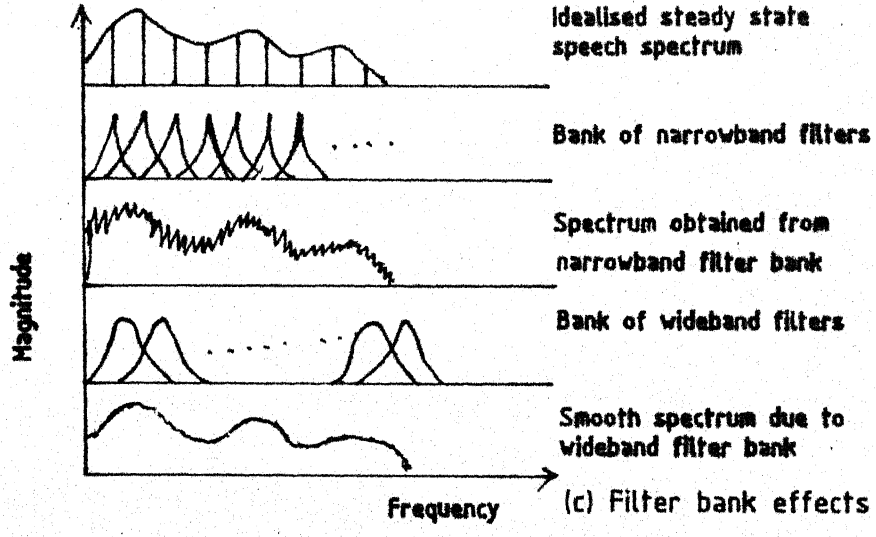

(c) Filter bank effects

Fig 2.10 CHANNEL VOCODER

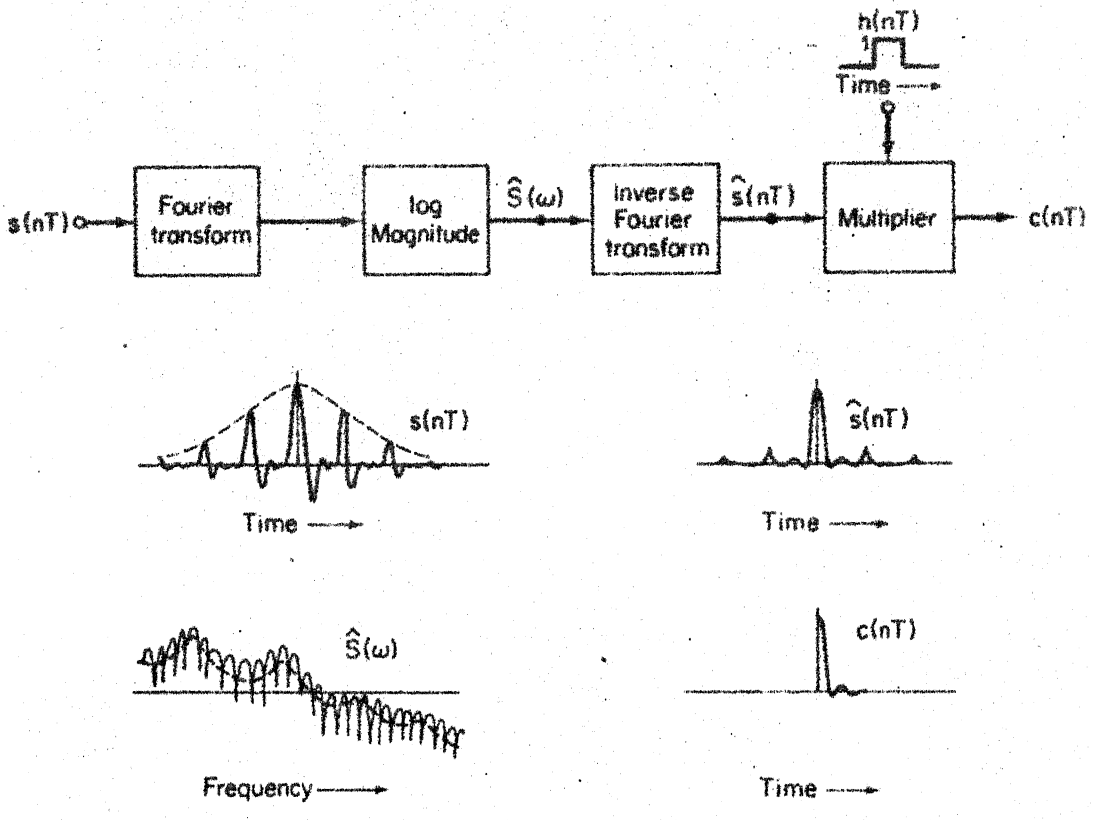

(a)

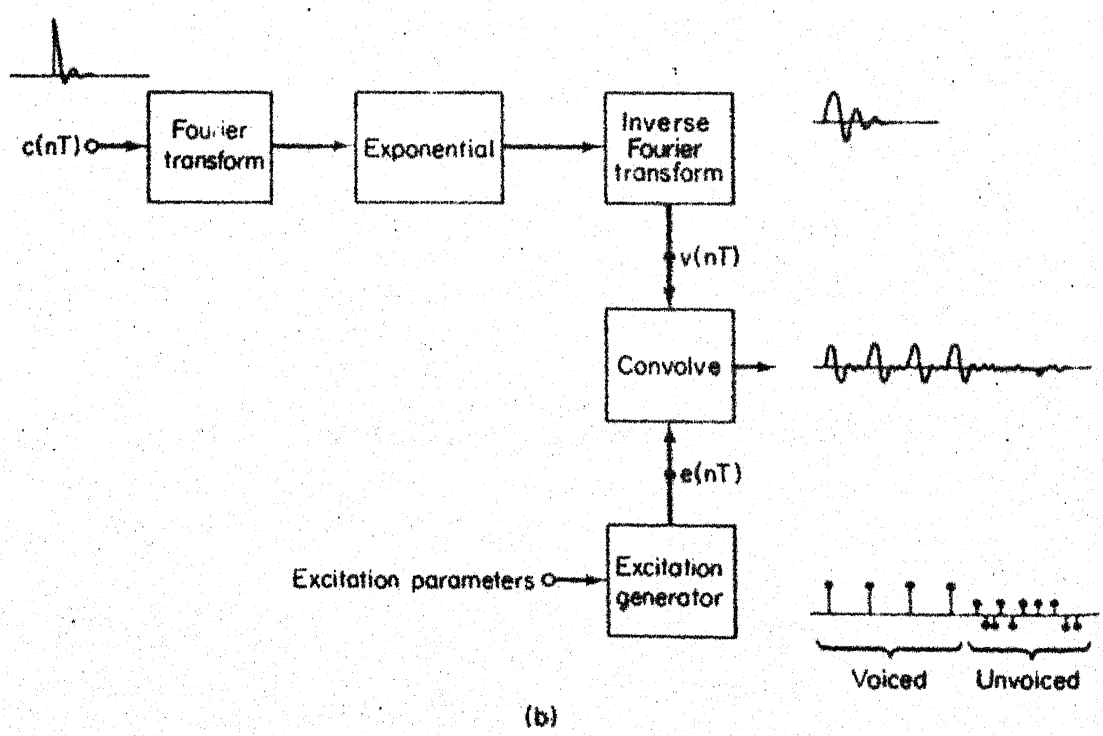

(b)

FIGURE 2.11 Block diagram of homomorphic analysis-synthesis system; (a) analyzer configuration, (b) synthesizer configuration.

show that the first three or four formants are enough to reproduce the speech in a terminal analog synthesiser.

2.5.4 LPC Vocoder

Figure 2.12 shows the major blocks needed to implement a LPC vocoder [18]. The predictor coefficients are not really extracted for use in synthesis here. Rather, the reflection coefficients, which are generated in the process of implementing recursive algorithms to solve the linear equations for predictor coefficients, are used for synthesis using an acoustic tube synthesiser. This follows from the fact that these reflection coefficients are found to correspond to the reflection coefficients at the boundaries of the fixed length sections of an acoustic tube.

Such an implementation using the acoustic tube overcomes the problems [3] of using a direct form structure generated directly from the predictor coefficients, or a cascaded form obtained from factoring the all pole transfer function

$$H(z) = \frac{G}{1 - \sum_{k=1}^{p} \alpha_k z^{-k}}$$

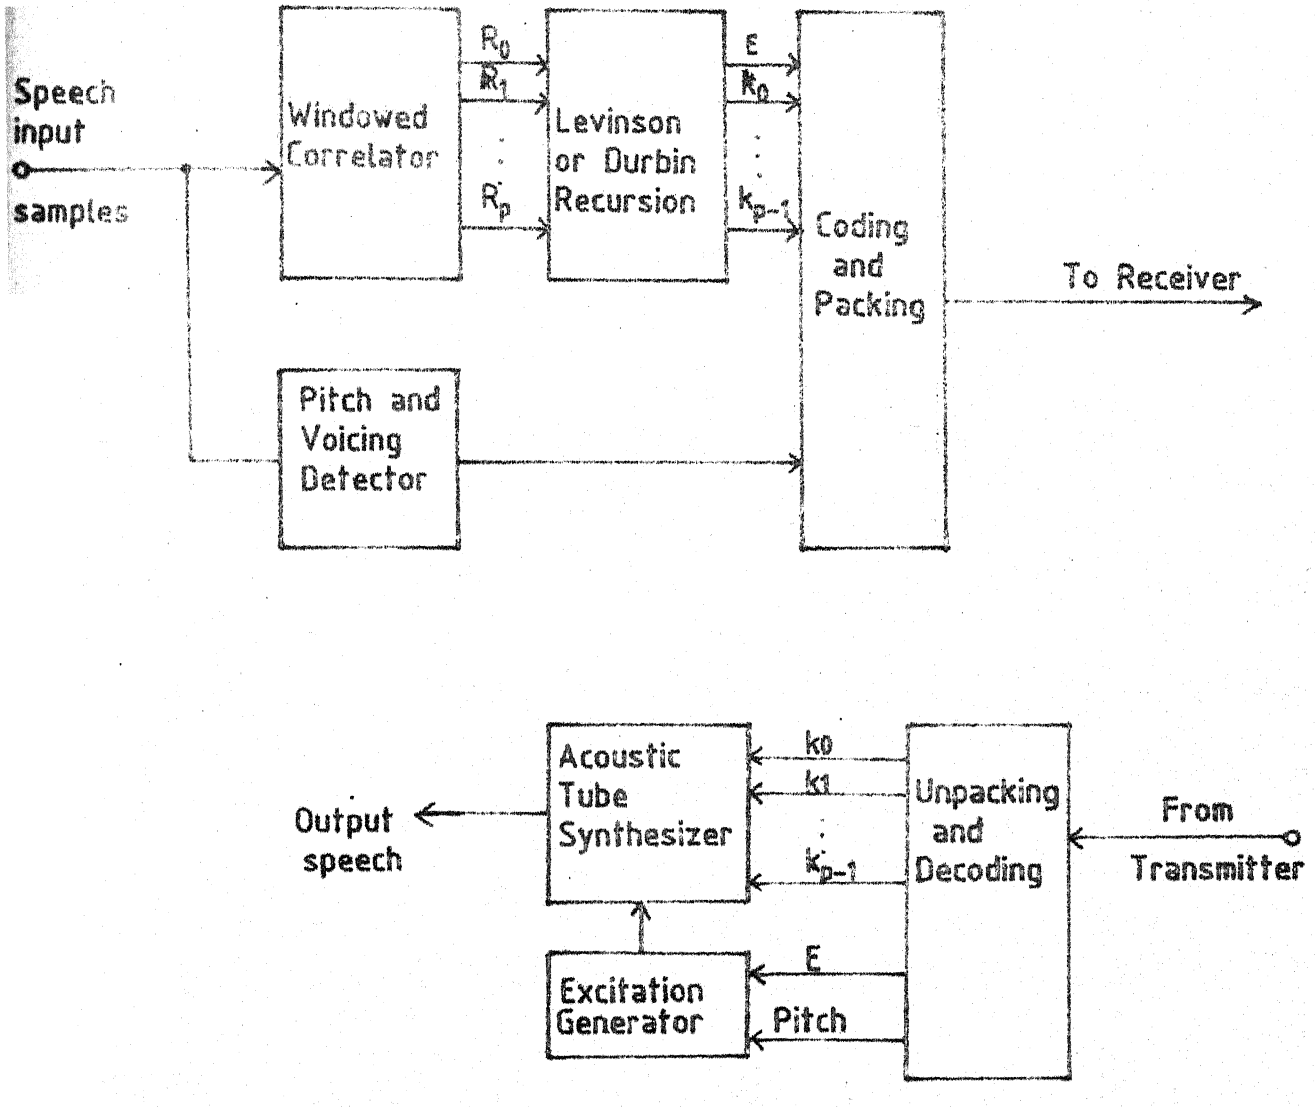

Fig 2.12 A LPC Vocoder

2.6 SUMMARY

This chapter reviewed the various analysis-synthesis systems available. Further work revolves around the implementation of the LPC vocoder since it involves simpler hardware and computation schemes. The excitation function which is sought to be separated in all the cases, is derived from a number of pitch period estimators mentioned in Chapter 3.

CHAPTER 3

EXCITATION ANALYZERS

3.1 PITCH PERIOD ESTIMATION

Any analysis of the speech signal must provide, as the result, the vocal tract function and the excitation function separately, in one form or another. To this end a number of efficient pitch period estimation algorithms have been developed. All the algorithms provide the two distinct pieces of information that constitute the excitation function.

(a) Whether a particular speech segment is voiced or unvoiced and

(b) if voiced, the pitch period of periodic excitation for that segment.

The pitch period estimation algorithms available are:

1) Modified autocorrelation method using clipping (AUTOC) (Figure 3.1)
2) Cepstrum method (Figure 3.2)
3) Simplified inverse filtering technique (SIFT) (Figure 3.3)
4) Data reduction method (DARD) (Figure 3.4)
5) Spectral equalisation LPC method using Newton's transformation (LPC) (Figure 3.5)
6) Average magnitude difference function (AMDF) (Figure 3.6)
7) Parallel processing method (PPROC) (Figure 3.7).

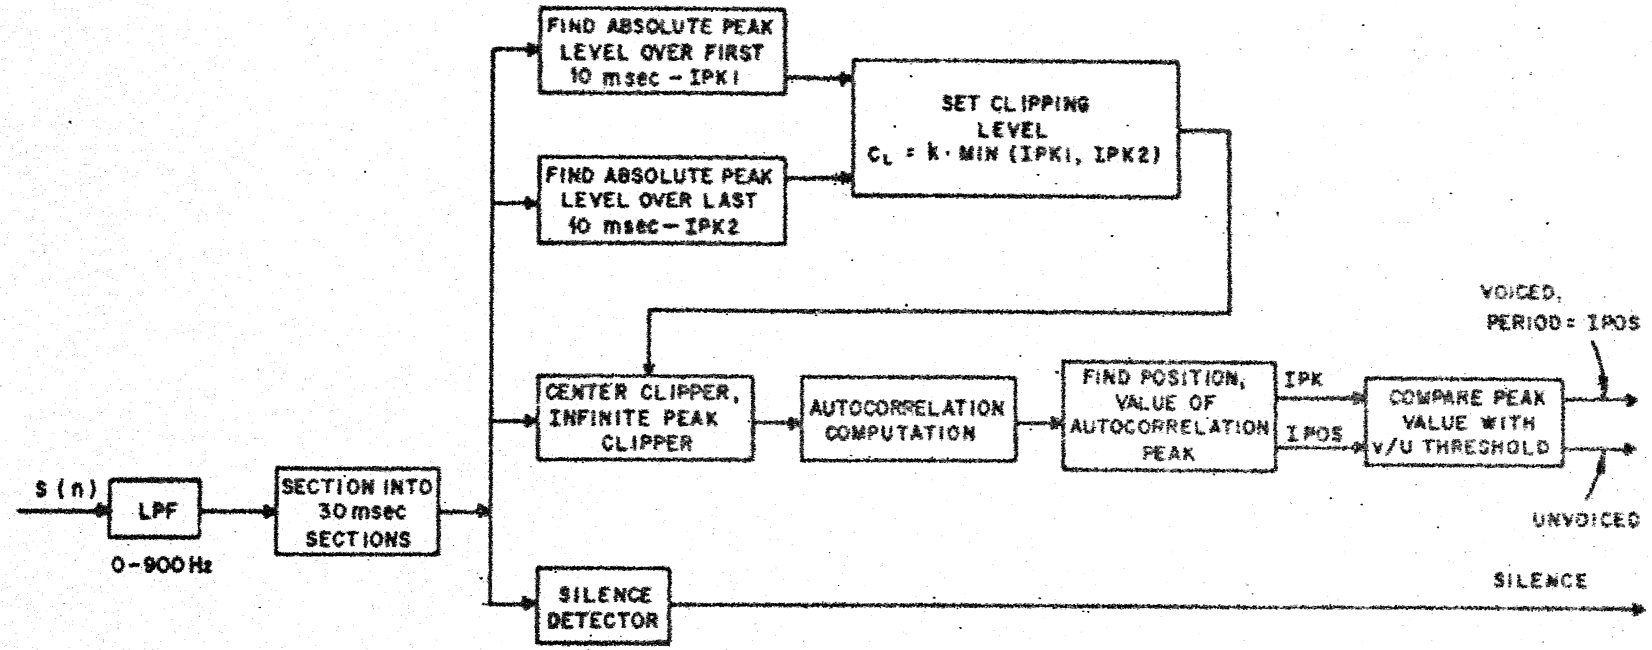

Fig 3.1 Block diagram of the AUTOC pitch detector.

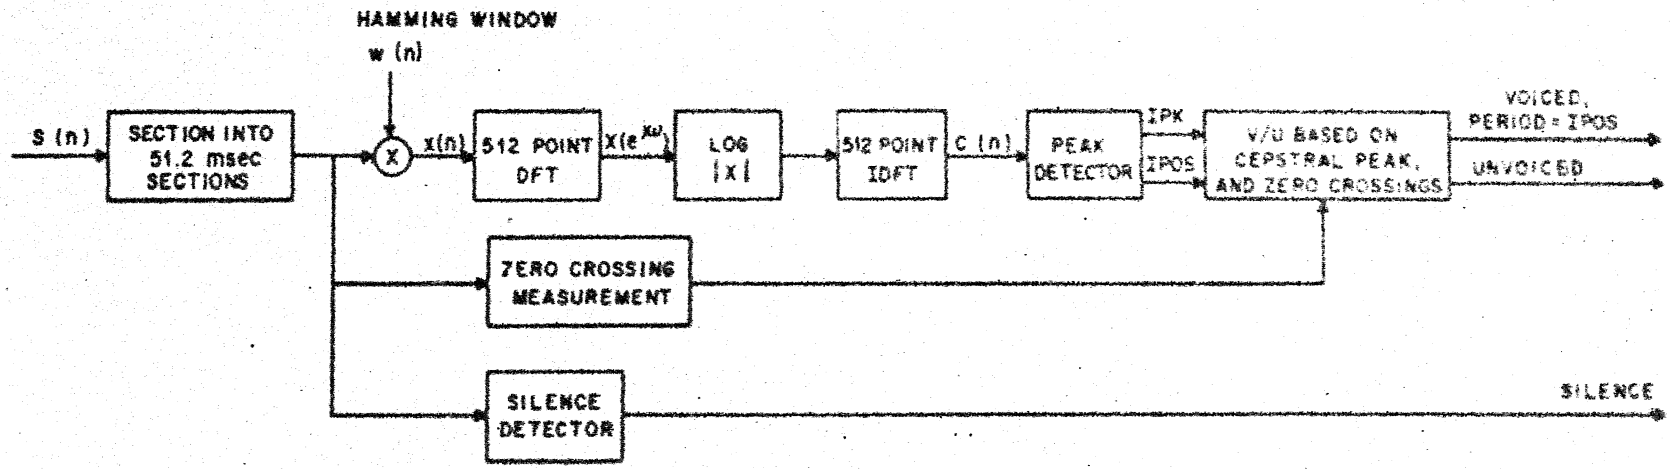

Fig 3.2 Block diagram of the CEP pitch detector.

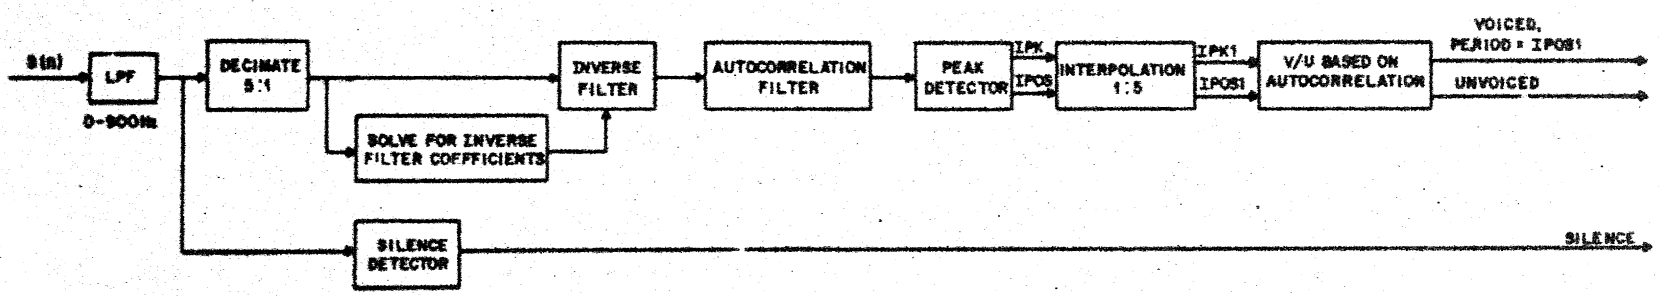

Fig. 3.3 Block diagram of the SIFT pitch detector.

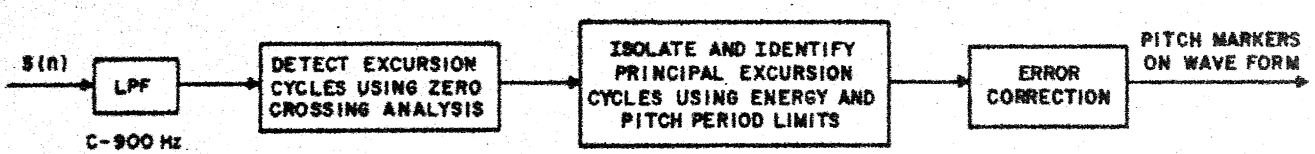

Fig 3.4 Block diagram of the DARD pitch detector.

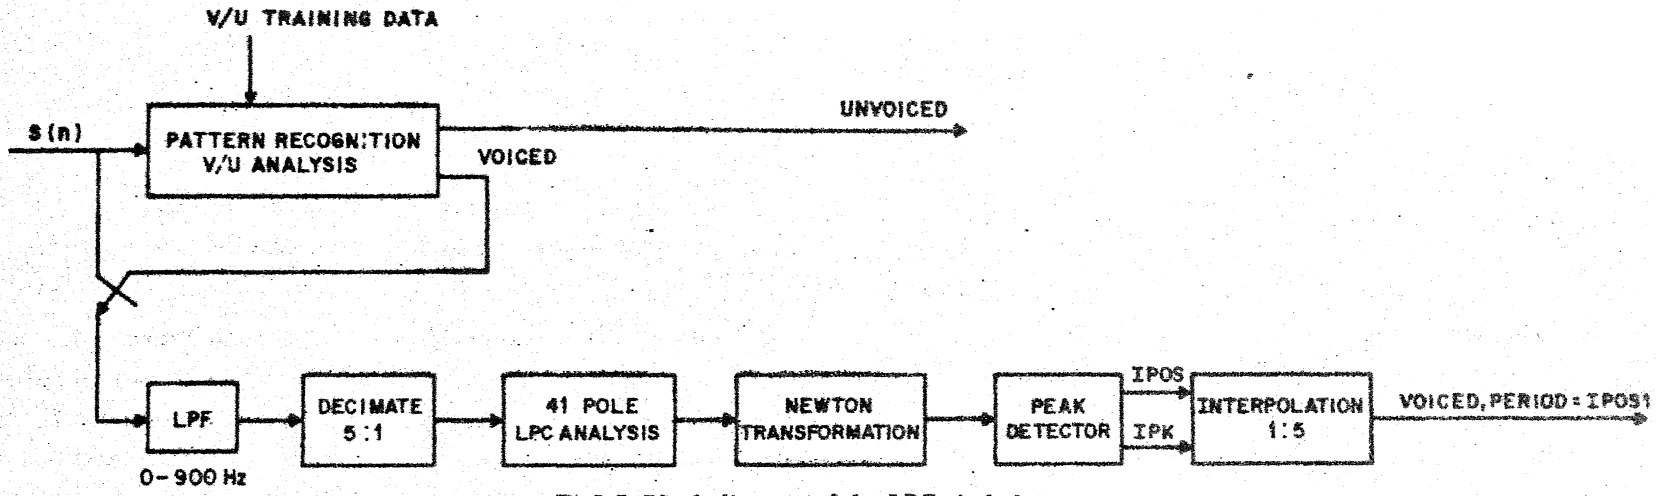

Fig3.5 Block diagram of the LPC pitch detector.

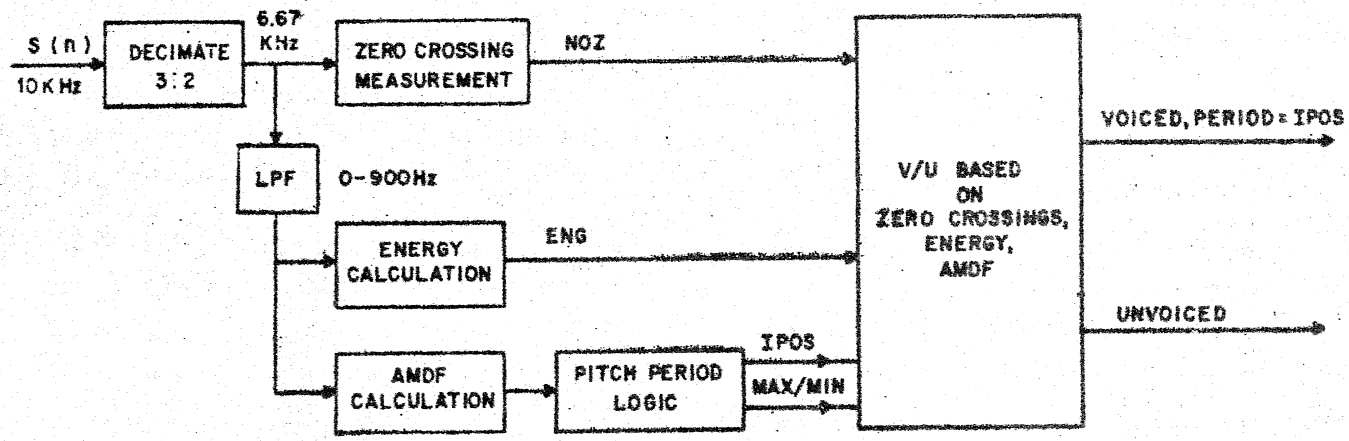

Fig.3.6 Block diagram of the AMDF pitch detector.

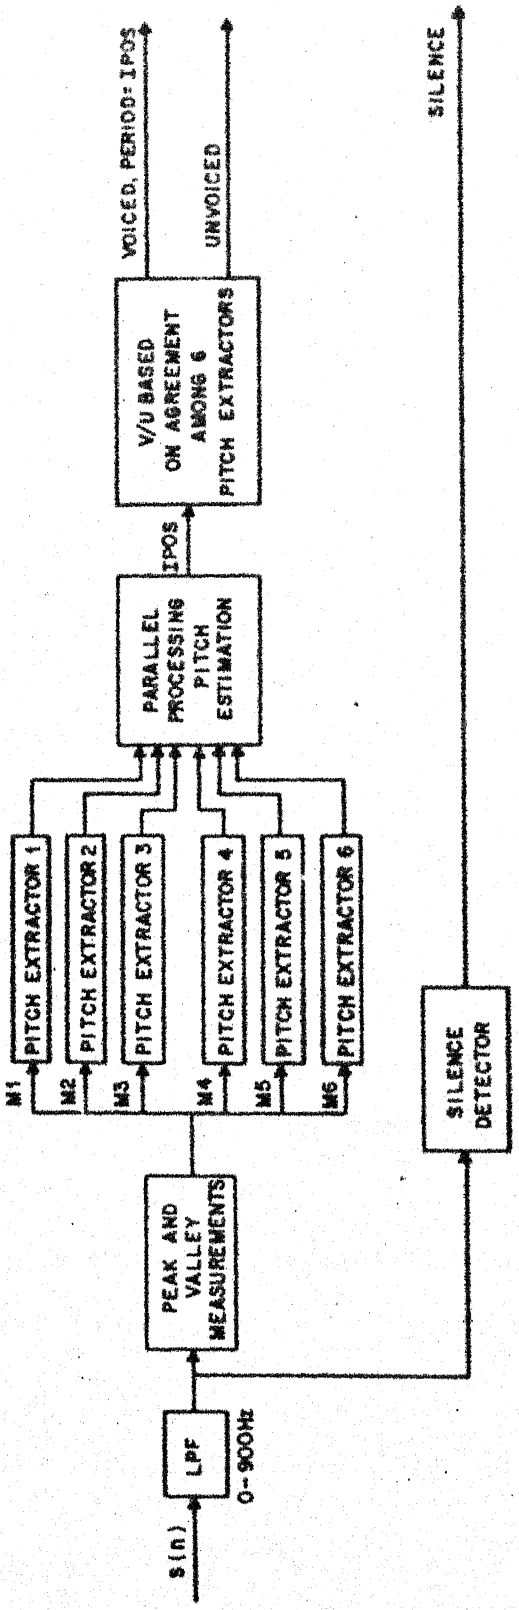

Fig. 3.7 Block diagram of the PPROC pitch detector.

3.2 SELECTION FOR IMPLEMENTATION

The selection of an algorithm for implementation from amongst the methods mentioned was made from a study [13] based on the following criteria:

1) Accuracy in estimating pitch period
2) Accuracy in making a voiced-unvoiced decision
3) Robustness of the measurements, i.e. they must be modified for different transmission conditions, speakers etc.
4) Speed of operation
5) Complexity of the algorithm
6) Suitability for hardware implementation
7) Cost of hardware implementation.

Based on this study, it was decided to implement the Parallel processing algorithm (PPROC) of Gold and Rabiner 6 for the following reasons:

1) The parallel processing involved, helps produce fairly accurate pitch period estimates over a range of speakers.
2) The algorithm is relatively straightforward and employs simple signal processing.
3) A real time implementation was found feasible using off-the-shelf components.

3.3 THE PARALLEL PROCESSING ALGORITHM

Gold and Rabiner [6] proposed a means of obtaining pitch period estimates by parallel processing of the peak and valley measurements made on the incoming speech signal

(Figure 3.7). These values, named M_1 to M_6 are fed to six independent pitch extractors or pitch period estimators. The estimates from these extractors, obtained parallely, are put through a sophisticated comparison algorithm with a bias. The final decision of voiced and unvoiced segments is made based on the agreement among the six pitch extractors in the above comparison. For voiced segments, the most popular candidate in the comparison is put out as the pitch period.

However, to reduce the complexity of the peak and valley measurements, a modified version of this algorithm, has been implemented.

3.4 THE IMPLEMENTED MODIFICATION

The modification, called the second modification to the original parallel processing algorithm is discussed below. The block diagram is in Figure 3.8. The basic differences from the original algorithm are discussed after pointing out that this modification is made on an assumption that fundamental frequencies are expected to be below 300 Hz. Based on this assumption the changes are:

(1) The peak and valley measurements have been replaced by selective filtering through two Lerner filters with bandwidths 80-240 Hz and 200-600 Hz as shown. Further, the filtered signals are fed into positive and negative peak detectors. The outputs of these detectors are positive pulses corresponding to the signal peaks, and whose magnitude is also equal to the peak magnitude of the signal at that point.

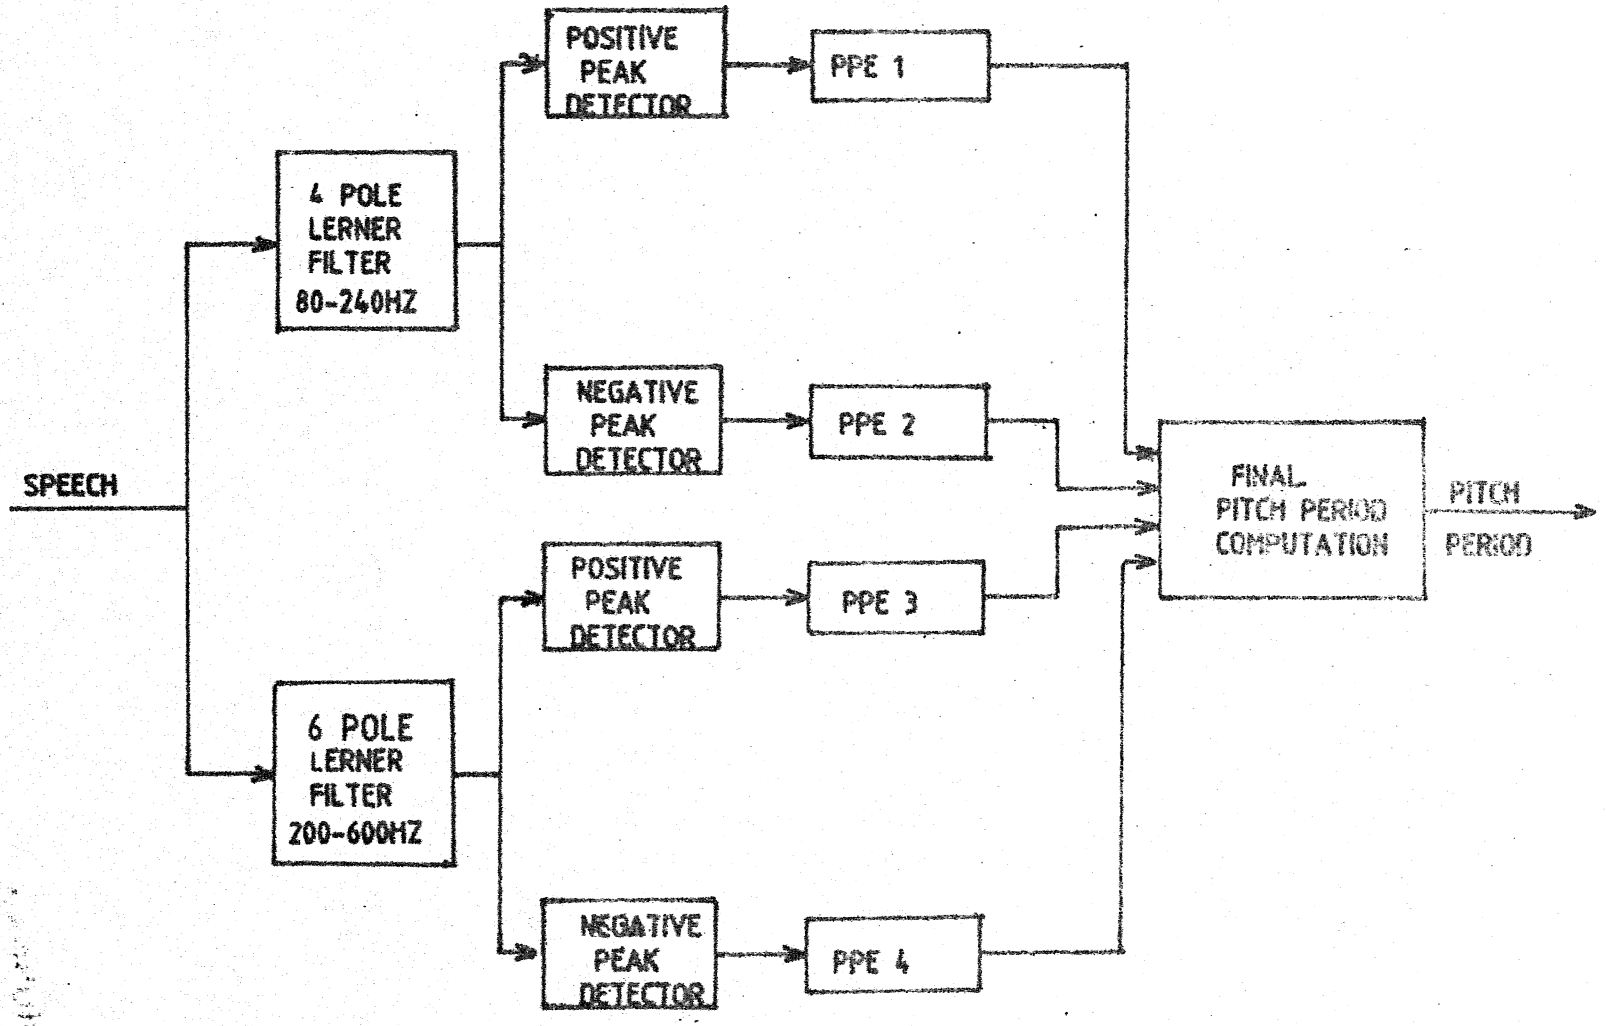

Fig 3.8 Block Diagram of the Pitch Period Estimation Algorithm

(2) The number of pitch extractors or pitch period estimators (PPE) has been reduced to four, one for each negative and positive peak detector. The detector consists of an exponential run down circuit which is set to the value of the peak. Once set a blanking period follows during which peaks if any are ignored. At the end of the blanking duration, the circuit is allowed to run down. If during this time any pulse comes which is greater in magnitude than the current run down value, then the run down circuit is reset to that value and the time interval elapsed between the two resets is put out as the pitch period (Figure 3.9). The original algorithm employed a variable blanking time and run down time constant based on the last pitch period average. In the implemented modification both these are fixed:

a) The blanking intervals is fixed to 2 ms.

b) The run down time constant is such as to run down to half the initial value in 5 ms.

In addition the run down circuit is reset after 16 msec if no reset occurs, indicating an unvoiced segment.

(3) The bias used in the original algorithm is removed and the final computation is performed by a coincidence check on the table formed in Figure 3.10. The coincidence measurements are conducted for the four most recent estimates P_i (P_{11}, P_{21}, P_{31}, P_{41}). Each of these "candidates" are compared with the other eleven (P_c) and a score is maintained for each P_i based on the inequality

$$|P_c - P_i| < \frac{1}{8} P_i \qquad (3.1)$$

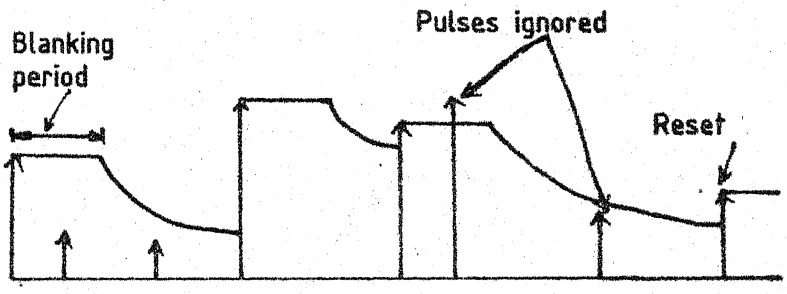

Fig 3.9 Run Down circuit

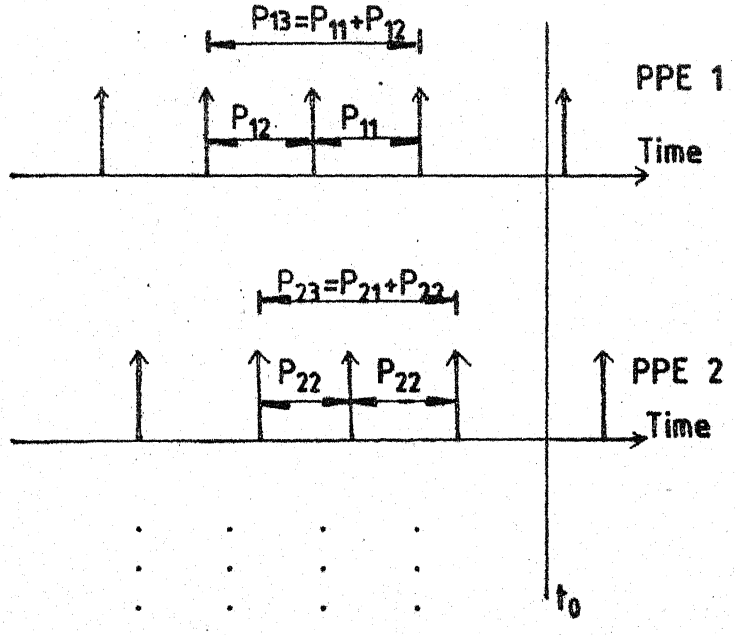

PPE NUMBER

P_{11}	P_{21}	P_{31}	P_{41}
P_{12}	P_{22}	P_{32}	P_{42}
P_{13}	P_{23}	P_{33}	P_{43}

Estimated Pitch Periods

Fig 3.10 Final Pitch Period Computation

The voiced-unvoiced decisions are then made on the following basis:

a) The candidate scoring maximum coincidences is put out as the pitch period.

b) If any of the two candidates are 16 msecs or more than then an unvoiced or "hiss" decision is made.

c) Also if no candidate gets at least 4 "votes", a hiss decision is made.

Gold and Rabiner [6] have indicated that for the assumption that only fundamentals below 300 Hz are expected, the performance of the modified algorithm is reasonably good.

CHAPTER 4

IMPLEMENTATION OF THE PARALLEL PROCESSING PITCH PERIOD ESTIMATOR

4.1 CONSIDERATIONS FOR THE DESIGN

The basic consideration for the design of the circuit and software for the implementation of PPROC algorithm has been: the use of off-the-shelf components. It was decided to use the 2912 line filter and the 2920 signal processing chips to implement the major signal processing functions. An initial attempt was made to realise the two band pass filters using the 2912 line filters with 4 software peak detectors residing in the 2920. However this was turned down subsequently in favour of a final implementation in which the filters, peak detectors and the run down circuits were implemented on two 2920 ICS thereby drastically reducing the chip count for the overall system.

4.2 THE INITIAL ATTEMPT

Based on the consideration that the cut off rates visualised by the 4 pole and 6 pole Lerner filters [23] could be equalled by the 2912 line filter, the scheme shown in Figure 4.1 was tried. A linear relationship was found to exist between the clock frequency to the 2912 filter and its cut off frequency. This property was used to derive the two band pass filters with pass bands as shown. The SAD 512D analog delay IC was used to compensate for the

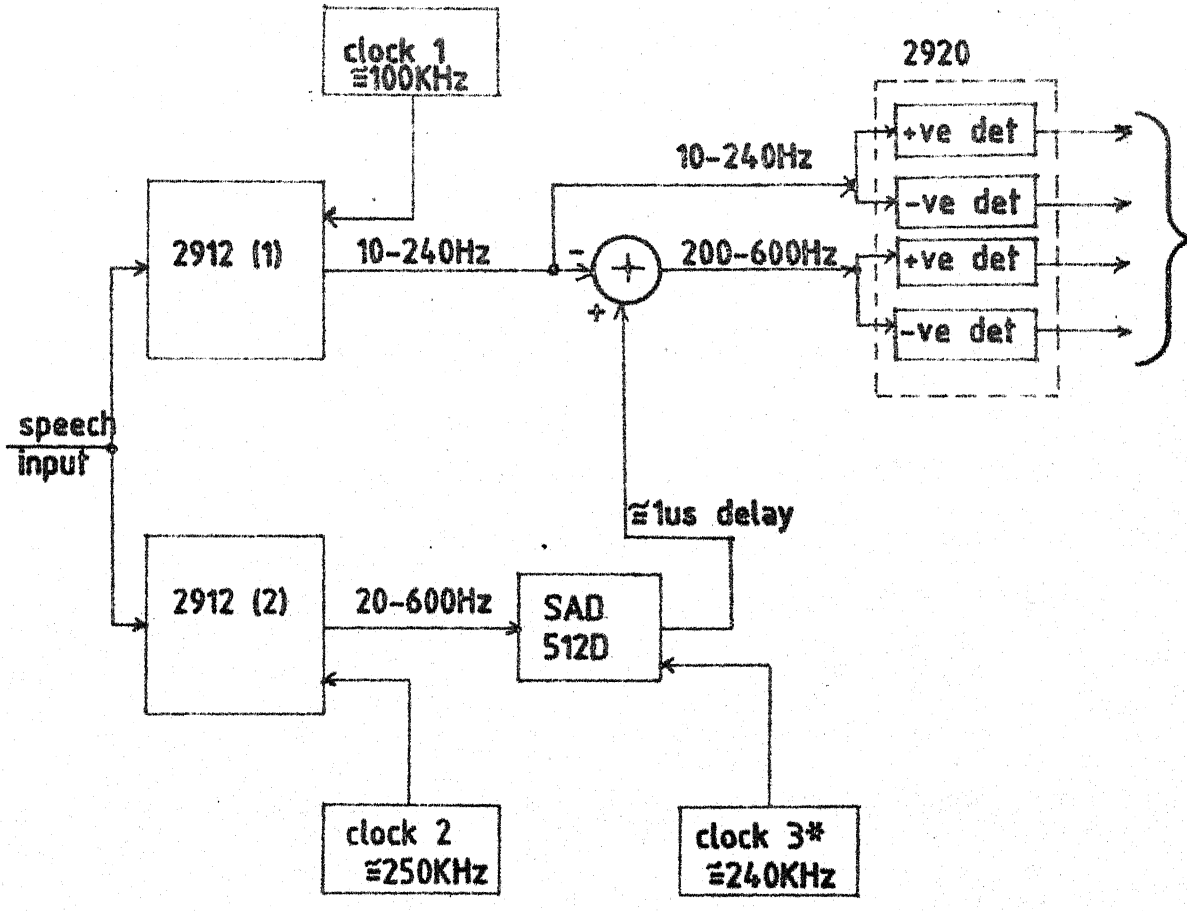

*clock adjusted to obtain correct delay
&all outputs are positive pulses corresponding to peaks

Fig 4.1 Schematic of first attempt

additional delay in the signal through 2912(1). The 4 peak detectors were implemented in the 2920 and overall, the scheme worked upto this point.

However, further implementation of the run down circuits and blanking intervals for the pitch period estimators was found to need a large number of components per channel. Hence this attempt was dropped and a more elegant final circuit was derived.

4.3 THE FINAL IMPLEMENTATION

The initial attempt ran into problems when processing after peak detection was considered. However, rethinking suggested a better implementation resulting in easier control of the run down circuits and a reduced chip count. The hardware and software aspects are separately discussed in the following sections. The final circuit was a single card containing the ICS as shown in Appendix A-1. This card provides the 4 parallel estimates of the pitch period and is plugged into the available workstation to perform the final computation.

4.3.1 The Hardware

A detailed circuit diagram is available in Appendix A-2 read with Appendix A-3.

Assuming speech input from an ordinary telephone handset, a two-stage, front end amplifier using two 741s (U8, U9) has been implemented for the necessary gain. The speech signal is then passed through the 2912 line filter

with the upper cut off frequency adjusted to 600 Hz using an NE555 clock (U1). This signal is passed to the SIGINO pins of the two 2920 ICS (U11, U12).

4.3.1.1 Use of 2920 signal processor

The pin layout is presented in Figure 4.2 for a 2920 IC 21 . Notes on the 2920 signal processor and the use of the 2920 signal processing software package are appended at Appendix D. The two 2920 ICS (U11, U12) have been used in an identical manner. Each is provided with a 6.144 MHz crystal which implies a 8 KHz sampling rate when the full program length of 192 instructions is used. The reference voltage for A/D and D/A conversion is provided by the set up of one LM 308 and two LM 103 voltage reference ICS (U2, U3, U4). At the processor output pins the mode of output is controlled by the mode control pins 25 (M_1) and 24 (M_2). By fixing M_1 at -5 volts and M_2 at +5 volts, the sigont pins 0-3 are made to provide TTL outputs. When external pull-up resistors are connected to these pins each has an output compatible to one TTL gate.

Inside U11 is the software implementation of a 4 pole Lerner filter, a positive and negative peak detector and two exponential run down circuits, one for each peak detector. The input signal is applied at pin 10 (sigin 0) and is sampled by the internal A/D convertor (Figure 4.2) under program control. The input sample is propagated through the software digital filter within and peaks are detected in the software peak detectors. Sigin 1 gets the

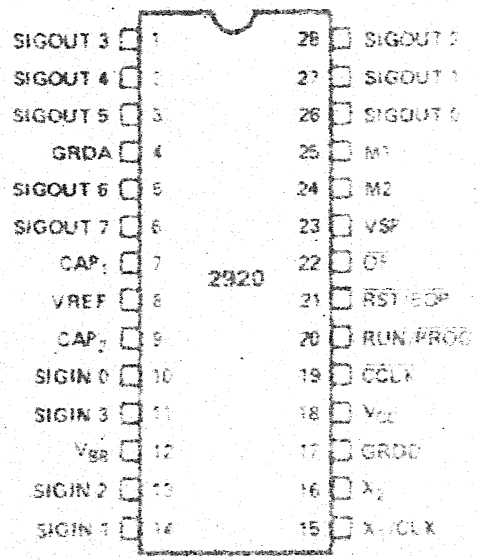

Fig 4.2 Pin layout of 2920

2 ms blanking pulse for the run down circuit corresponding to positive peaks (PPE1 of Appendix A-2). A TTL level pulse is output at pin Sigcut 0 whenever the run down circuit is reset. Similarly sigin 2 gets the 2 mc blanking pulse for the negative peak run down circuit (PPE2 of Appendix A-2) and a TTL level pulse appears at pin sigcut 2 whenever this circuit is reset.

U12 is similarly configured with the difference that a 6 Pole Lerner filter is implemented within.

Pin Sigin 3 is provided with -2 volts so that when sampled it serves to discharge the external sample and hold capacitor rapidly enough to prevent error in reading the input values on pins Sigin 1 and Sigin 2. Sampling pins sigin 1 and 2 indicates whether the blanking pulses are present or not.

The outputs of the 2920 ICS are buffered using 4 of the 6 buffers in a 7407 (U33). These 4 buffered pulses go one to each of the PPEs 1 to 4.

4.3.1.2 The pitch period estimators

Four identical blocks, named PPE 1 to 4, perform the functions of

a) Providing a 2 ms blanking interval during which no run down occurs in the 2920.
b) Counting the time interval between two successive pulses from the 2920s.
c) A pulse is output from the PPE to indicate that 16 ms

or more have elapsed between two successive reset pulses of the run down circuit.

The detailed circuit of a PPE is in Appendix A-3. PPE 1 will be discussed in detail to represent all the PPEs.

The buffered pulse from the 2920 sigout pin is used to perform the following operations:

a) Trigger on the rising edge, one of the two monostables of 74123 (U15), to generate a 2 ms blanking pulse.

b) Trigger on the falling edge, the second monostable whose outputs, Q and $\overline{Q}$, are applied to the reset and trigger inputs of the XR 2240 counter (U25) to start a fresh count.

c) Strobe into the 8282 latch (U29), on the falling edge, the latest count reached by the XR 2240 counter, i.e. the latest pitch period estimate.

The XR 2240 counter is reset under the following conditions:

No. 1 - When a count representing 16 msec is reached (i.e. when the 3 MSB are all 1), or

No. 2 - A Q output from the monostable appears due to a 2920 output.

The reset pulse is obtained by a logical OR of outputs of the monostable and the 4 input NAND gate, 1/74 LS20 (U16). The output of the 4 input NAND gate is also used to trigger on the falling edge, one of the monostables in U5. The outputs Q, $\overline{Q}$ of this monostable are input to the latch 8282 (U7) which is made transparent. Thus U now holds

information that a 16 ms count has been exceeded in the concerned PPE.

The 8282 (U29) data is placed on the data bus when a $\overline{CS}$ is given to the $\overline{OE}$ pin of the 8282. This $\overline{CS}$ is obtained under software control from the dual 1 out of 4 decoder 74 LS 155 (U23) which uses $\overline{IO}/\overline{M}$, A15, A14, A13 to decode the chip to be selected.

4.3.1.3 The interrupt set-up

In the previous sections it has been shown how the four 8282 latches (U29, U30, U31, U32) always hold the most recent pitch estimate. The fifth latch U7 holds the information as to which of the PPEs has exceeded 16 ms in the recent count. All this information is to be read into the microprocessor for final computation.

The microprocessor is interrupted by an RST 7.5 interrupt generated by the timer U13, every 5 ms, suitably inverted by 1/7400 (U14) to meet the workstation requirements.

The microprocessor puts out the pitch period information on the screen of the workstation for every other RST 7.5, i.e. effectively once for every 10 ms. This timing can be varied by varying the RC of timer U13 suitably.

4.3.2 The Software

The software used is implemented in two basic parts:

1) 2920 signal processor software including a Lerner filter, positive and negative peak detector and run down circuits for both positive and negative peaks (Appendices B-1 & B-2)

2) 8085 program for final pitch period computation (Appendix C).

4.3.2.1 2920 Signal Processor Software

Printouts appended at Appendices B-1 & B-2 contain the programs burnt into the PROM areas of U11 and U12 respectively.

For U11, the 4 pole Lerner filter has complex pole pairs at 80, 120, 200, 240 Hz along the jw axis, offset 80 Hz to the left of the imaginary axis.

For U12, the 6 pole Lerner filter has complex pole pairs at 200, 250, 350, 450, 550, 600 Hz along the jw axis, offset 100 Hz to the left of the imaginary axis.

The pole locations and the Lerner filter implementations are in Figure 4.3(a) and (b) respectively. High cut off rates are realised for such filters which are constituted by summed outputs of parallel resonators [8, 23].

Extensive use of the SPAS 20 compiler [22] software available on the MDS-Intellec 2 system has been used to develop the filters, taking care of the intermediate overflows. The output of each resonator is multiplied by an appropriate residue before summing as shown in Figure 4.3(b). The adjustment of the gains was aided by simulating the filter using the correct sampling rate with the help of the 2920 Simulator [22] Software also available on the MDS.

The rest of the program is easily understood by the flow chart in Figure 4.4. BIT A and BIT B are used to indicate whether or not a blanking pulse is present. If

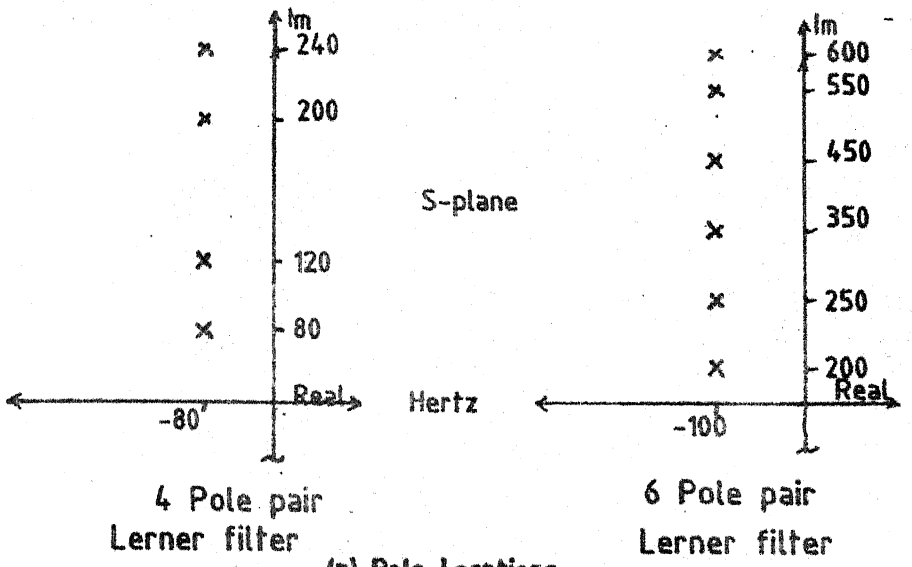

(a) Pole Locations

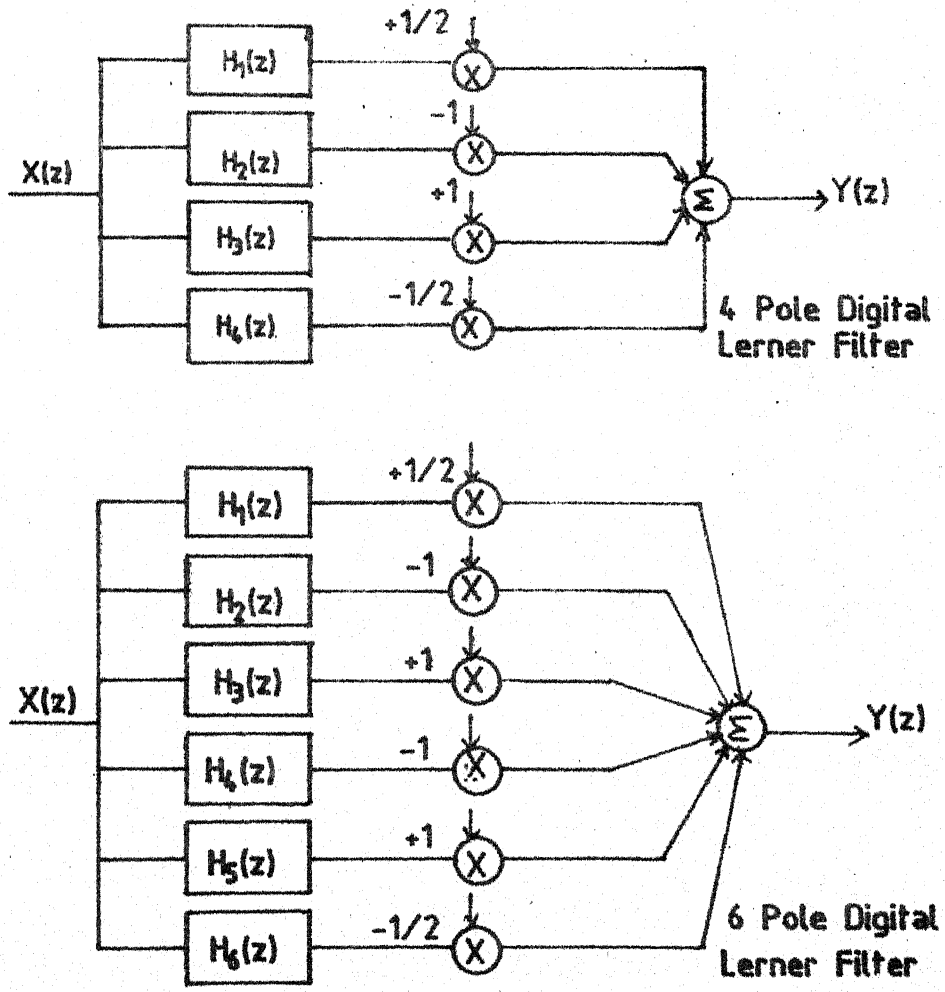

(b) Digital implementation

Fig 4.3 Implementation ofDigital Lerner Filters

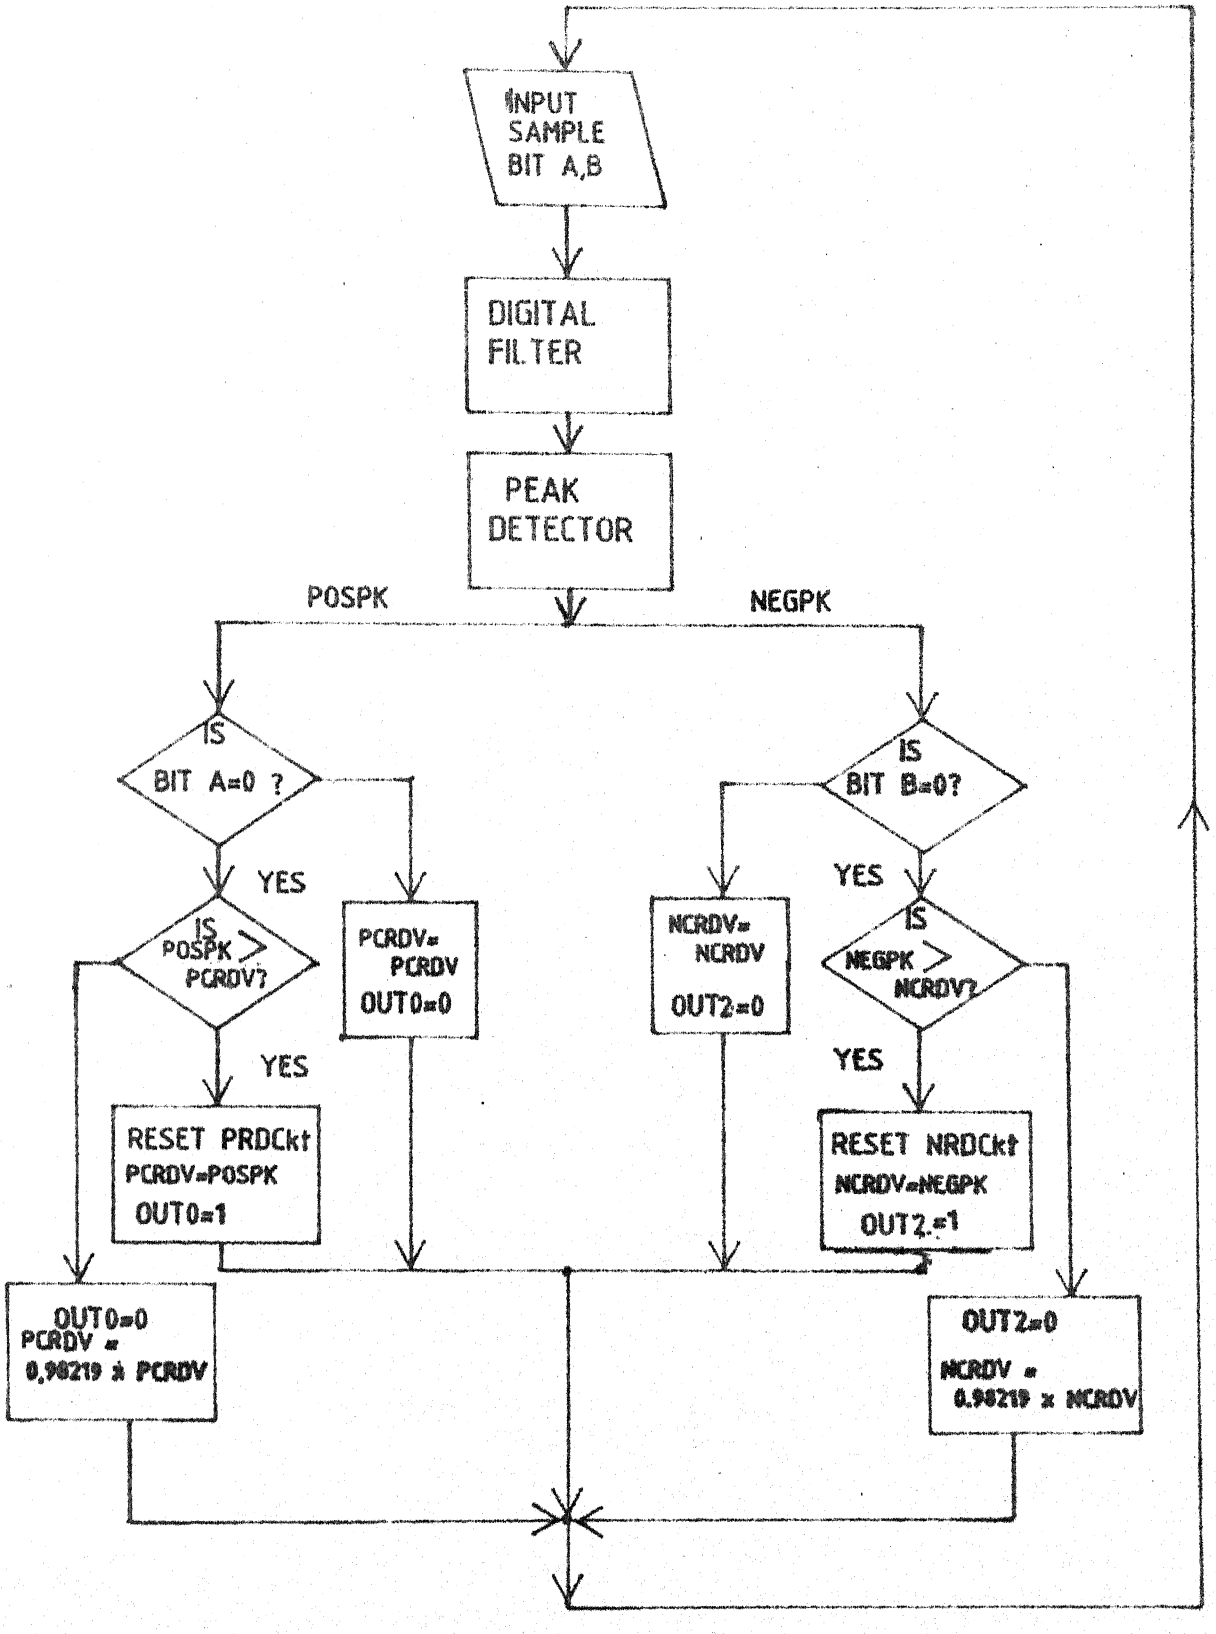

Fig 4.4 Flow Chart for 2920 Software

either is 1, then the respective run down circuit is updated with the same value as it has been set with. The run down is allowed to continue any time they drop to 0.

A single peak detector algorithm has been implemented which remembers the sign of the input signal and at the end gives out a positive or negative peak. This algorithm essentially compares 3 successive input samples and will put out as peak the centre value, when it is greater than the ones before and after it. This algorithm is shown in Figure 4.5.

For the run down circuit, the equation implemented is

$$y_n = 0.98219\ y_{n-1}$$

and simulates an exponential run down with the desired time constant, i.e. run down to half initial value in 5 ms.

The analog output instructions OUT 0 and OUT 2 are used to output TTL level pulses at pins Sigout 0 and Sigout 2 corresponding to resets of the positive and negative run down circuits respectively.

4.3.2.2 Final computation software

Software for the final computation of the pitch period based on coincidence measurements for the latest 4 estimates P_{11}, P_{21}, P_{31}, P_{41} is implemented as a program for the 8085 and fed into the workstation.

A printout of the program is appended at Appendix C.

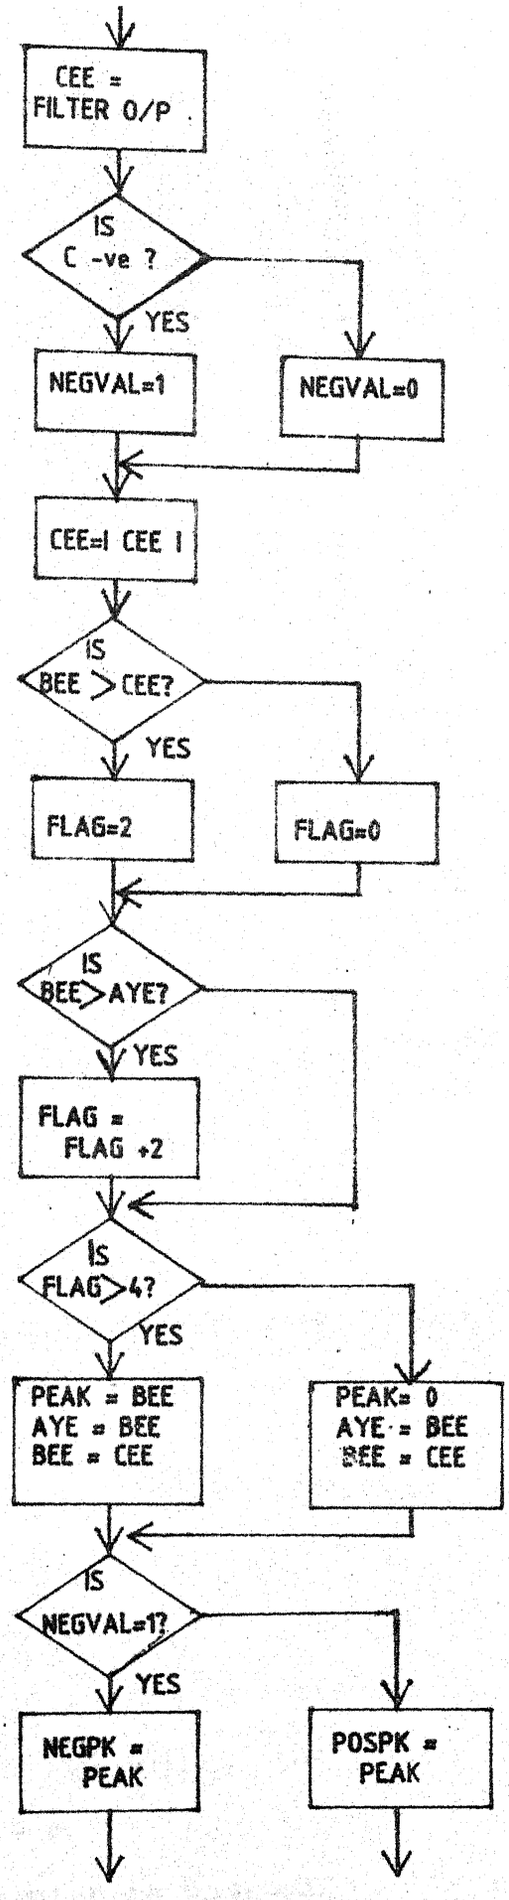

Fig 4.5 Flow Chart for PEAK DETECTOR

The program has two main parts:

a) The background program, which currently wastes time but could be used for control and communications in a full vocoder implementation.

b) The interrupt service routine which is entered each time RST 7.5 interrupt is caused by the timer on the card.

The ISS has two parts:

The first part is entered for the first RST 7.5 received. The reset status word of U7 and the values from the 4 estimators are read into the second row of the table of Figure 3.10, i.e. P_{12}, P_{22}, P_{32}, P_{42}. In case any estimator has indicated a reset of the counter caused by exceeding a count for 16 ms, then the value is corrected to $\emptyset FF_H$. Before leaving this part of the ISS and returning to the main program, a flag (CTRD) is set to 1 to indicate that the next time a RST 7.5 occurs, the second part of the ISS must be executed.

The second part is entered on the next RST 7.5 interrupt. This time all the five latches are read and the correct values for P_{11}, P_{21}, P_{31}, P_{41} are filled in. Then $P_{13} = P_{11} + P_{12}$ is filled in. Likewise P_{23}, P_{33}, P_{43} are computed and filled in. Next, one of the four eligible candidates P_i (i.e. P_{11}, P_{21}, P_{31}, P_{41}) are selected for comparison. The value 1/8 P_i is computed and stored. The selected P_i is compared against the other P_cs. Everytime the condition $P_c - P_i > 1/8\ p_i$ is met, then the score in the appropriate counter is updated. In this way all the 4 candidates are compared.

Finally the scores in the respective counters are compared and the majority winner is output as the pitch period.

However if the majority winner fails to make a score of at least 4, then a "hiss" decision is made. Also if any two or more of the candidates are $\emptyset FF_H$, then again a "hiss" decision is made.

In the above implementation one observation made is that if the pitch changes suddenly between two 10 ms segments then a hiss decision is made before the new pitch period is put out. Appropriate interpolation at the receiver is likely to overcome this problem.

CHAPTER 5

SUGGESTIONS FOR FURTHER WORK

5.1 IMPROVEMENTS FOR PRESENT IMPLEMENTATION

The present implementation has been based on available components. However the complete circuit beyond the 2920 ICS may be drastically reduced in component count by using 8253 programmable interval timer/counter, Figure 5.1.

The advantages perceived in implementing the counters on the 8253 may be listed as under:

a) Drastically reduced component count both in the number of IC's and passive components.

b) Reduction in the power consumption would be substantial since only two 8253 are sufficient to implement all the four counters as well as have timers to provide the timing for the interrupt control. The 8282 latches each consuming 1 watt power can be dispensed with.

c) The total number of monostables used at present is eight. Changing over to 8253 provides automatically for the conditions when count exceeds 16 msec. Therefore only four monostables need to be retained for providing the blanking pulses.

d) The additional logic circuitory used for reset of the XR 2240 is therefore automatically dispensed with.

e) Higher precision may be achieved since the individual pitch period estimates can be made on 16 bit counters

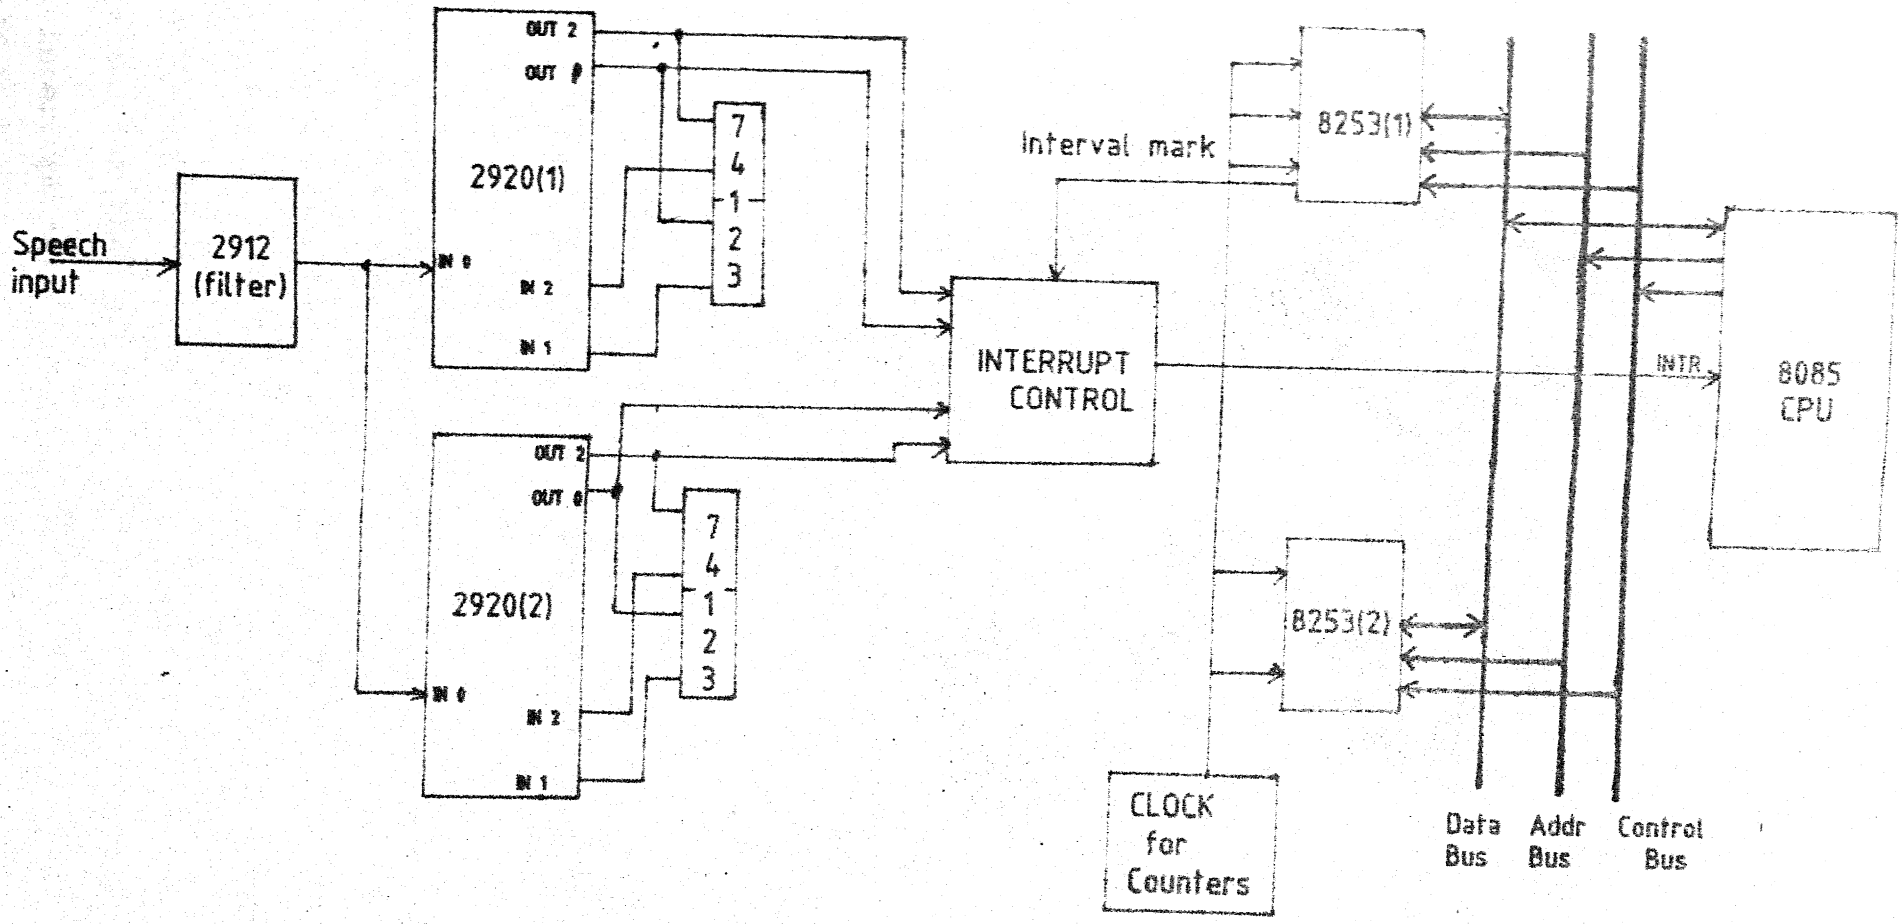

Fig 5.1 Block diagram for suggested improvement

as against 8 bits in the present implementation.

5.2 SUGGESTED SCHEME FOR THE REALISATION OF LPC VOCODER

The pitch period estimator implemented can be used as the excitation analyser for an LPC vocoder based on the schematic of Figure 5.2. Study has shown the feasibility of such a project [19]. The major signal processing hardware required is a combination filter-codec (AMI S3507) and two Signal Processing Interfaces (SPI). One SPI is used to implement the LPC analyzer and the other an acoustic tube synthesizer. The SPI used can be the AMI S2811 or the equivalent NEC PD 7720, both of which are well suited. The 8085 is used for data transfer, control and multiplexing functions along with communications with the host terminal. The overall scheme of implementation corresponds to that shown in Figure 2.12.

5.2.1 Analyzer Implementation

The analyzer is a windowed autocorrelator followed by Durbin's recursion to evaluate the reflection coefficients (Section 2.3). The SPI receives speech samples as serial data from the combo codec-filter, once per analysis frame, on command from the control processor during an A/D interrupt service. The received speech samples are weighted by a Hamming window and the P+1 correlation coefficients are computed for the current frame. This computation concludes the interrupt service routine.

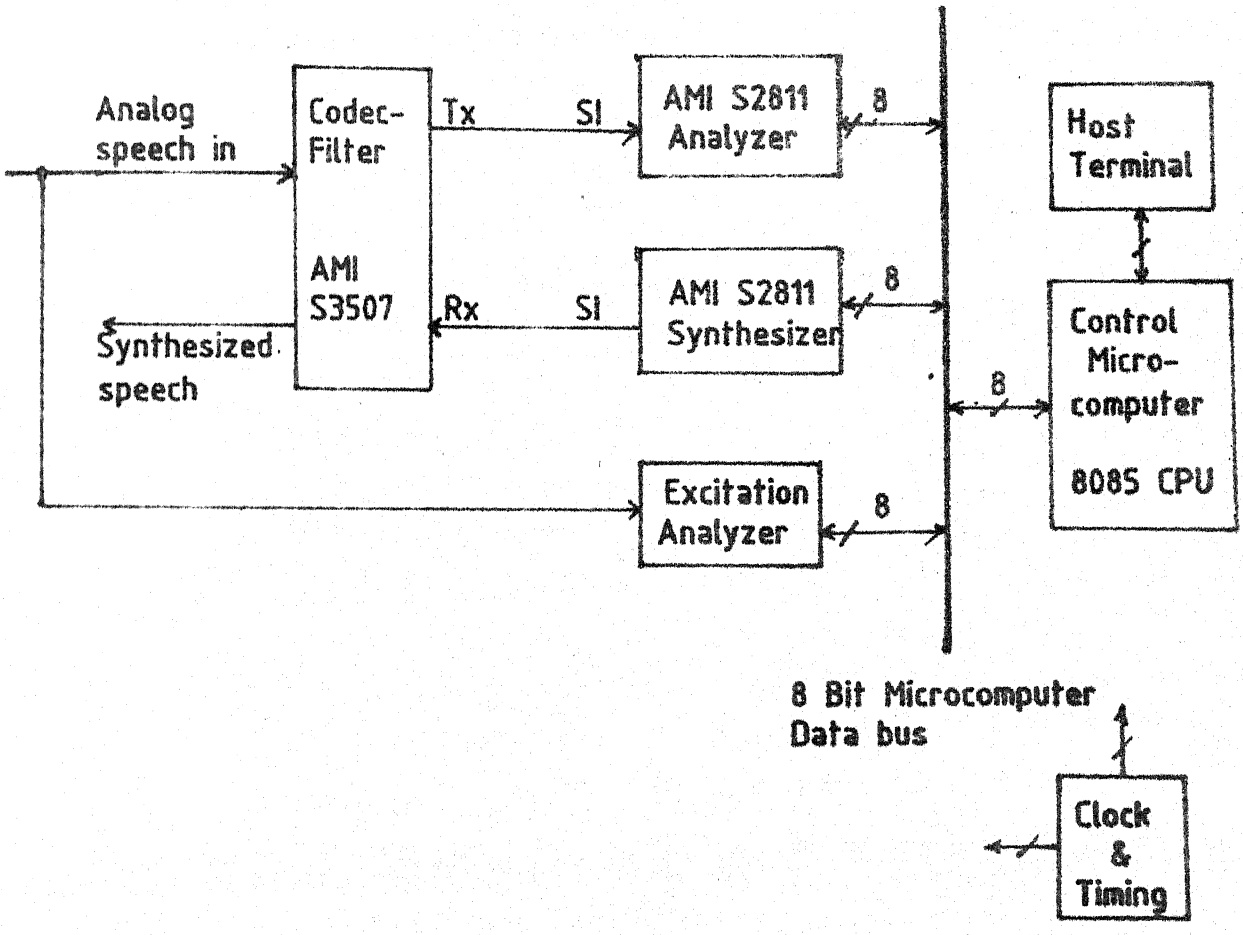

Fig 5.2 LPC Vocoder Architecture

The background routine in the SPI computes the LPC reflection coefficients passed from the interrupt service routine above. This computation, also, is performed once per frame on command from the control processor. The end result of the computation is an array consisting of P reflection coefficients and the prediction residual energy. Parameter coding is implemented in the control processor in order to maintain the flexibility of the SPI analyzer. The analysis frame length is 22.5 ms for 8 KHz sampling rate for an intended predictor order often.

The pitch period estimator already implemented can provide a pitch estimate/unvoiced decision once per the 22.5 ms frame.

5.2.2 Synthesizer Implementation

In each frame, the SPI synthesizer receives an energy estimate, pitch/voicing decision, and a set of reflection coefficients from the control and communications microprocessor. The synthesizer reconstructs the speech and outputs it as PCM data through the SPI serial output port. The synthesizer consists of an excitation generator, a lattice (acoustic tube) filter and a one pole de-emphasis filter. The lattice filter coefficients are obtained from a linear interpolation of the past and present frame's reflection coefficients. In voiced frames, the filter excitation is a pulse train with pitch equal to the estimate and amplitude based on a linear interpolation of the

past and present frame's energy estimates. In unvoiced frames, a psuedorandom noise waveform is used. In each sampling interval, the SPI interrupt driven foreground routine updates the excitation generator as well as lattice and de-emphasis filters to produce a synthetic speech sample. The foreground routine also interpolates the reflection coefficients three times a frame and interpolates the pitch pulse amplitudes during each pitch period.

The background program is activated when the foreground program receives a frame mark from the control processor. It then inputs a set of synthesis parameters under a full handshake protocol. Parametric decoding is executed in the control processor. The background routine also converts the energy estimate parameter to pitch pulse amplitudes during voiced frames and psuedorandom noise amplitudes during unvoiced frames. These amplitudes are based on the energy estimate, pitch period, and frame size.

5.3 CONCLUSION

Various analysis-synthesis schemes for speech processing have been reviewed in the thesis. From amongst these, it is found that an LPC vocoder implementation is feasible using available components.

A pitch period estimator based on the Parallel Processing algorithm of Gold and Rabiner was implemented and found to be working satisfactorily. The hardware size

can be drastically reduced as suggested. Lack of a facility to test the estimator for real speech input samples inhibits comments on its performance though tests have otherwise shown it to be fairly accurate in the extraction of pitch period of signals generated using a Laboratory function generator.

REFERENCES

[1] FLANAGAN J.L., Speech Analysis, Synthesis and Perception, Springer-Verlag.

[2] JAYANT N.S., 'Digital Coding of Speech Waveforms: PCM, DPCM and DM Quantizers', Proceeding IEEE, May 1974.

[3] OPPENHEIM A.V., Applications of Digital Signal Processing, Prentice Hall.

[4] RABINER L.R., SCHAFER R.W., Digital Signal Processing of Speech Signals, Prentice Hall.

[5] MARKEL J.D., GRAY A.H., Linear Prediction of Speech, Springer Verlag.

[6] GOLD B., RABINER L.R., 'Parallel Processing Techniques for Estimating Pitch Periods of Speech in the Time Domain', Journal of the Acou. Soc. of America (JASA), August 1969.

[7] GOLD B., 'Digital Speech Networks', Proc. IEEE, Dec. 1977.

[8] BEAUCHAMP K., YUEN C., Digital Methods for Signal Analysis, George Allen & Unwin.

[9] OPPENHEIM A.V., SCHAFER R.W., Digital Signal Processing, Prentice Hall.

[10] OPPENHEIM A.V., SCHAFER R.W., 'Homomorphic Analysis of Speech', IEEE Trans. on Audio and Electroacoustics, June 1968.

[11] RABINER L.R., SCHAFER R.W., 'Digital Representation of Speech Signals', Proc. IEEE, April 1975.

[12] MARKEL J., 'Linear Prediction: A Tutorial Review', Proc. IEEE, April 1975.

[13] RABINER L.R., et al., 'A Comparative Study of Several Pitch Detection Algorithms', IEEE Trans. on ASSP, Oct. 1976.

[14] FLANAGAN J.L., 'Automatic Extraction of Formant Frequencies for Continuous Speech', JASA, Jan. 1956.

[15] ATAL B.S., HANAUER S.L., 'Speech Analysis and Synthesis by Linear Prediction of the Speech Wave', JASA, Aug. 1971.

[16] DUDLEY H., 'The Vocoder', Bell Laboratories Record, Dec. 1939.

[17] GOLD B., RADER C.M., 'The Channel Vocoder', IEEE Trans. on Audio and Electroacoustics, Dec. 1967.

[18] HOFFSTETTER E.M., et al., 'Microprocessor Realisation of a Linear Predictive Vocoder', IEEE Trans. on ASSP, Oct. 1977.

[19] FELDMAN J.A., et al., 'A Compact Flexible Vocoder Based on a Commercial Signal Processing Microcomputer', IEEE Journal of Solid State Circuits, Feb. 1983.

[20] Intel Components Catalogue, 1982.

[21] 2920 Analog Signal Processor Design Handbook.

[22] 2920 Signal Processing Software:
SPAS 20 Compiler Users' Manual
2920 Simulator Users' Manual
2920 Assembly Language Manual.

[23] LERNER RM, 'Band Pass Filters with Linear Phase', Proc. IEEE, March 1964.

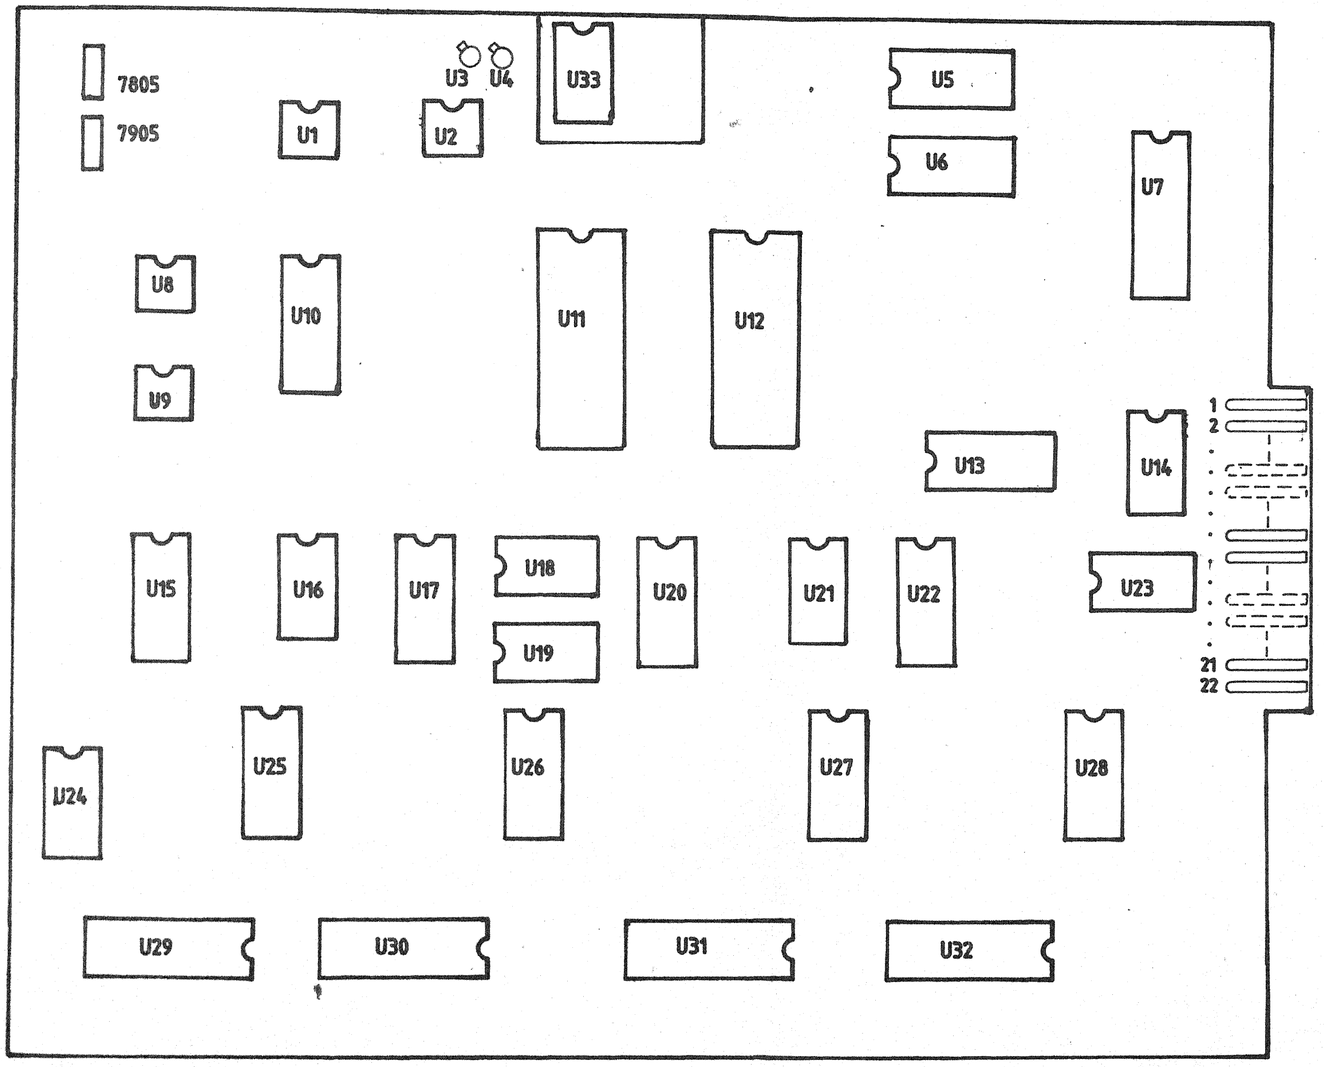

PC CARD LAYOUT

TABLE	
COMPONENT	IC NO.
U1	NE555
U2	LM 308
U3,4	LM 103
U5,6,15,17,20,22	74123
U7,29,30,31,32	8282
U8,9	LM 741
U10	2912
U11,12	2920
U13,25,26,27,28	XR 2240
U14,18	7400
U16,21	74 LS20
U19	74 LS32
U19 u U23	74 LS155
U24	7414
U33	7407

GROUNDS
DIGITAL GROUND
ANALOG GROUND
GROUNDS CONNECTED AT P/S

APPENDIX-- A

POWER SUPPLY AND GROUNDS

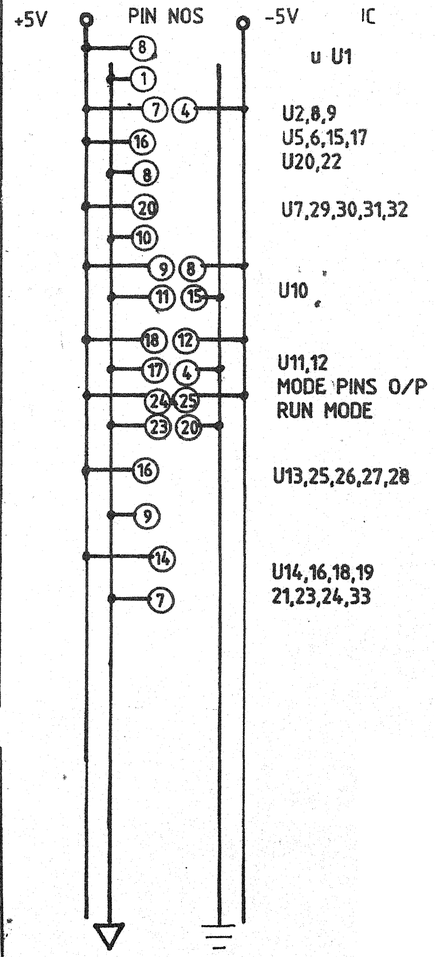

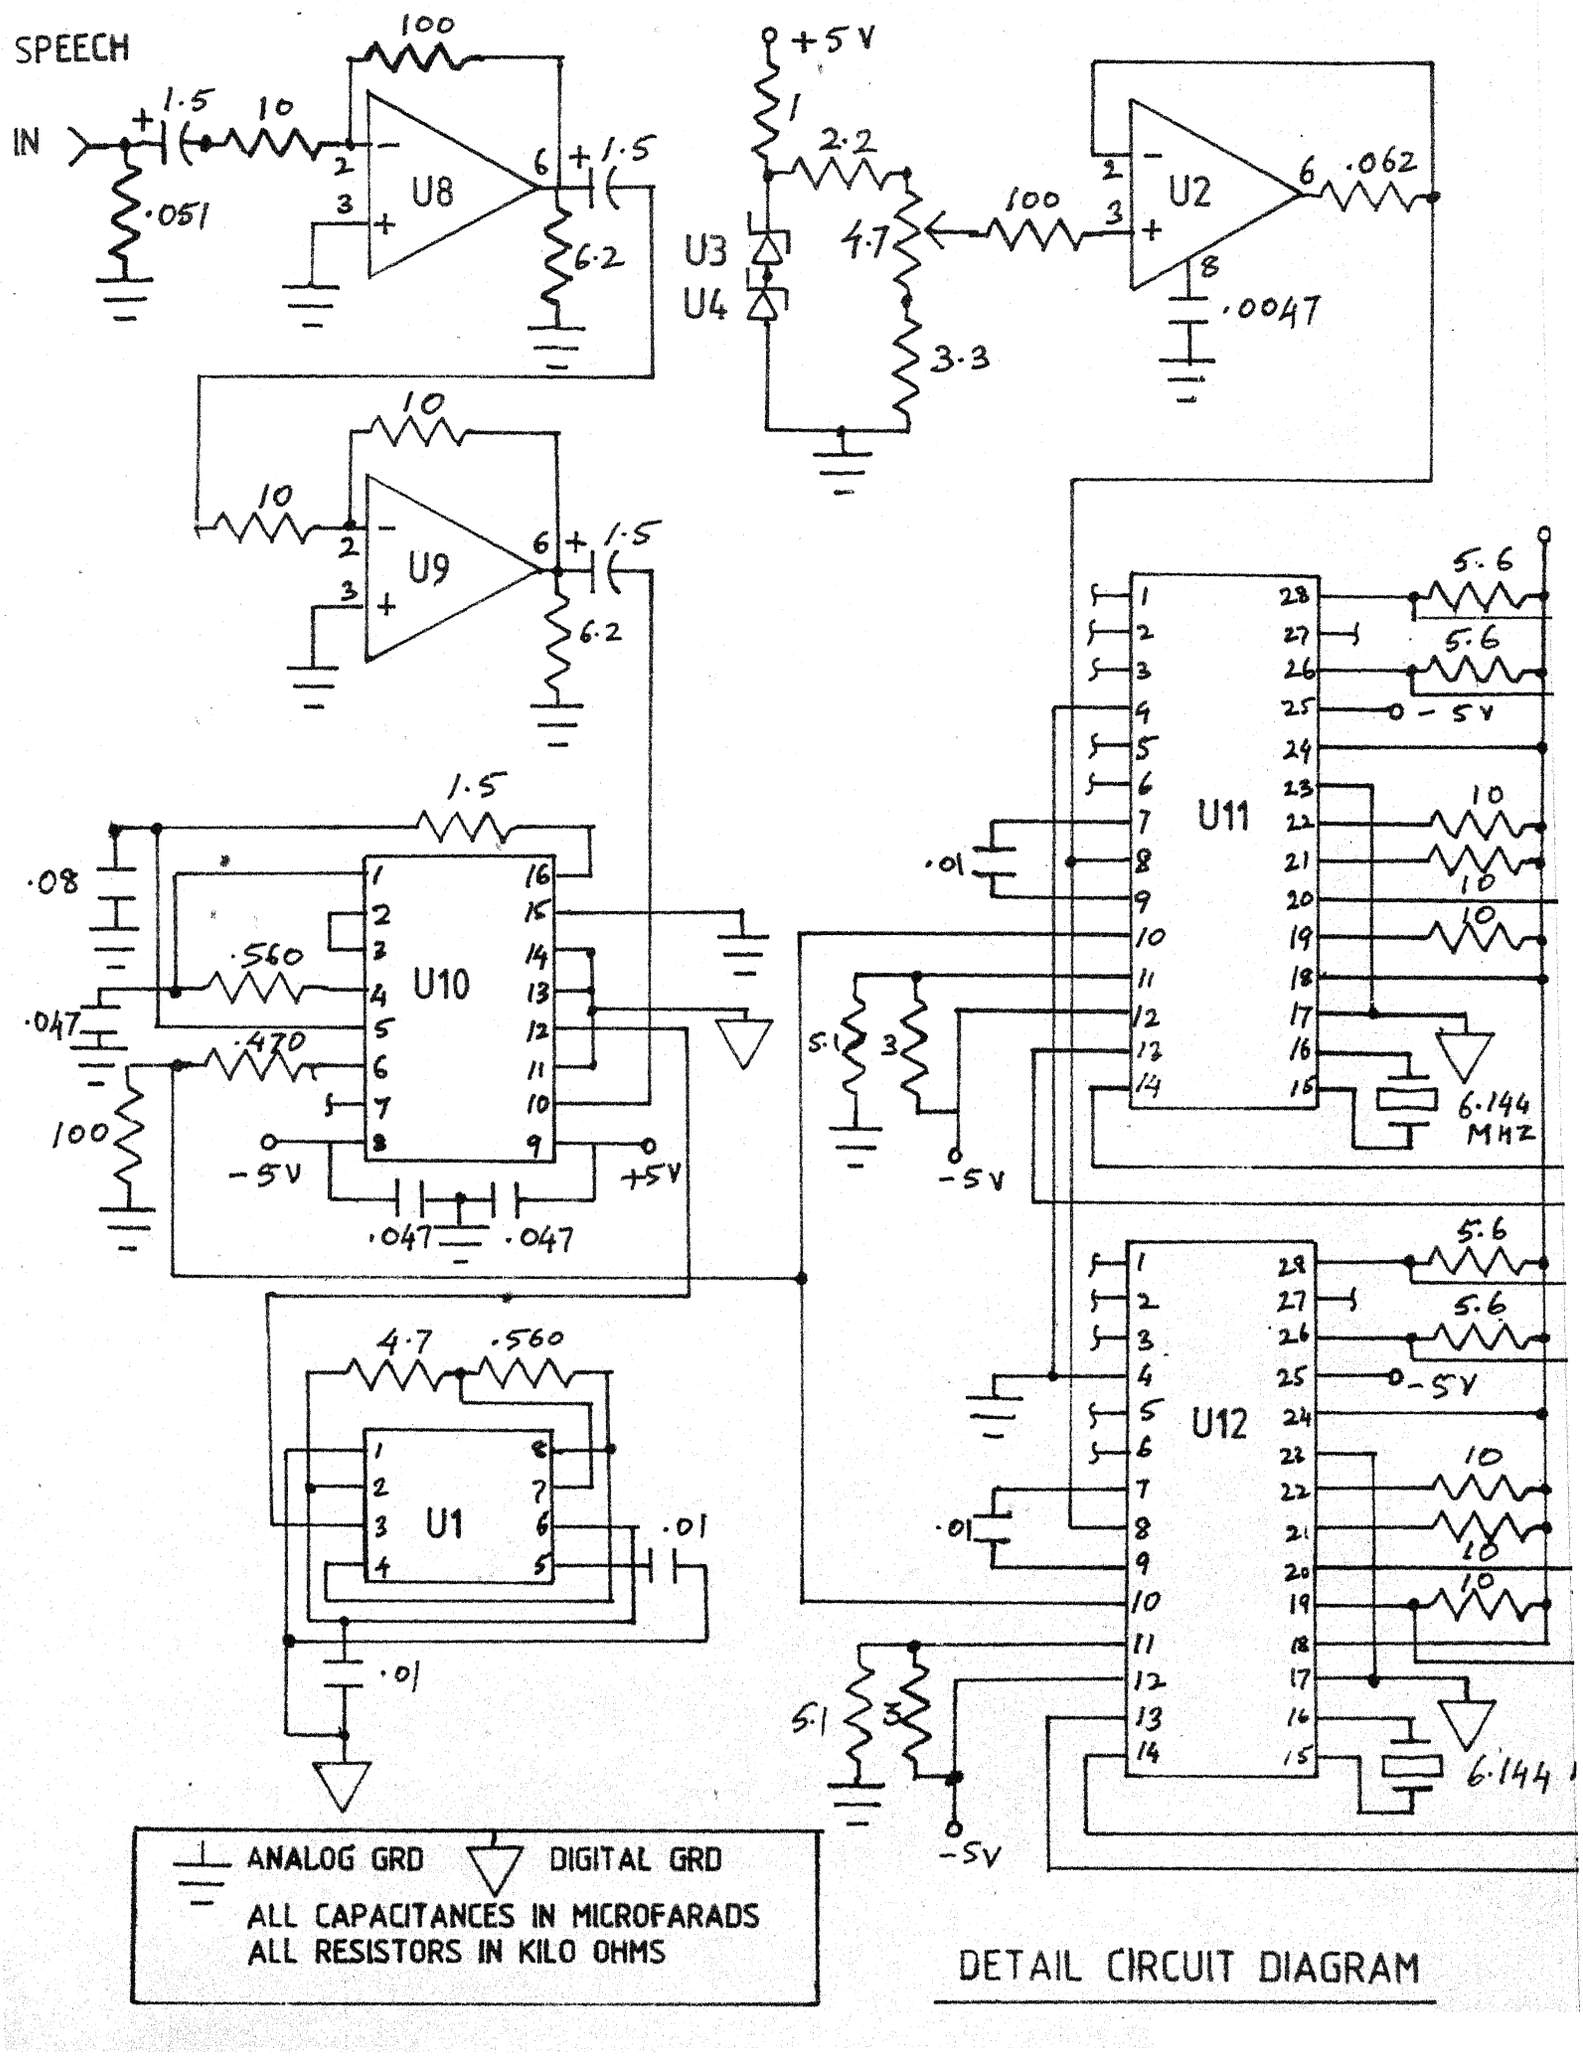
SPEECH
IN
100
1.5
10
.051
U8
6.2
+5V
1
2.2
U3
U4
4.7
3.3
100
U2
.062
.0047
10
U9
5.6
U11
6.144 MHZ
.01
5.1
3
-5V
.08
.560
U10
.047
.470
100
+5V
4.7
U1
U12
ANALOG GRD
DIGITAL GRD
ALL CAPACITANCES IN MICROFARADS
ALL RESISTORS IN KILO OHMS
DETAIL CIRCUIT DIAGRAM

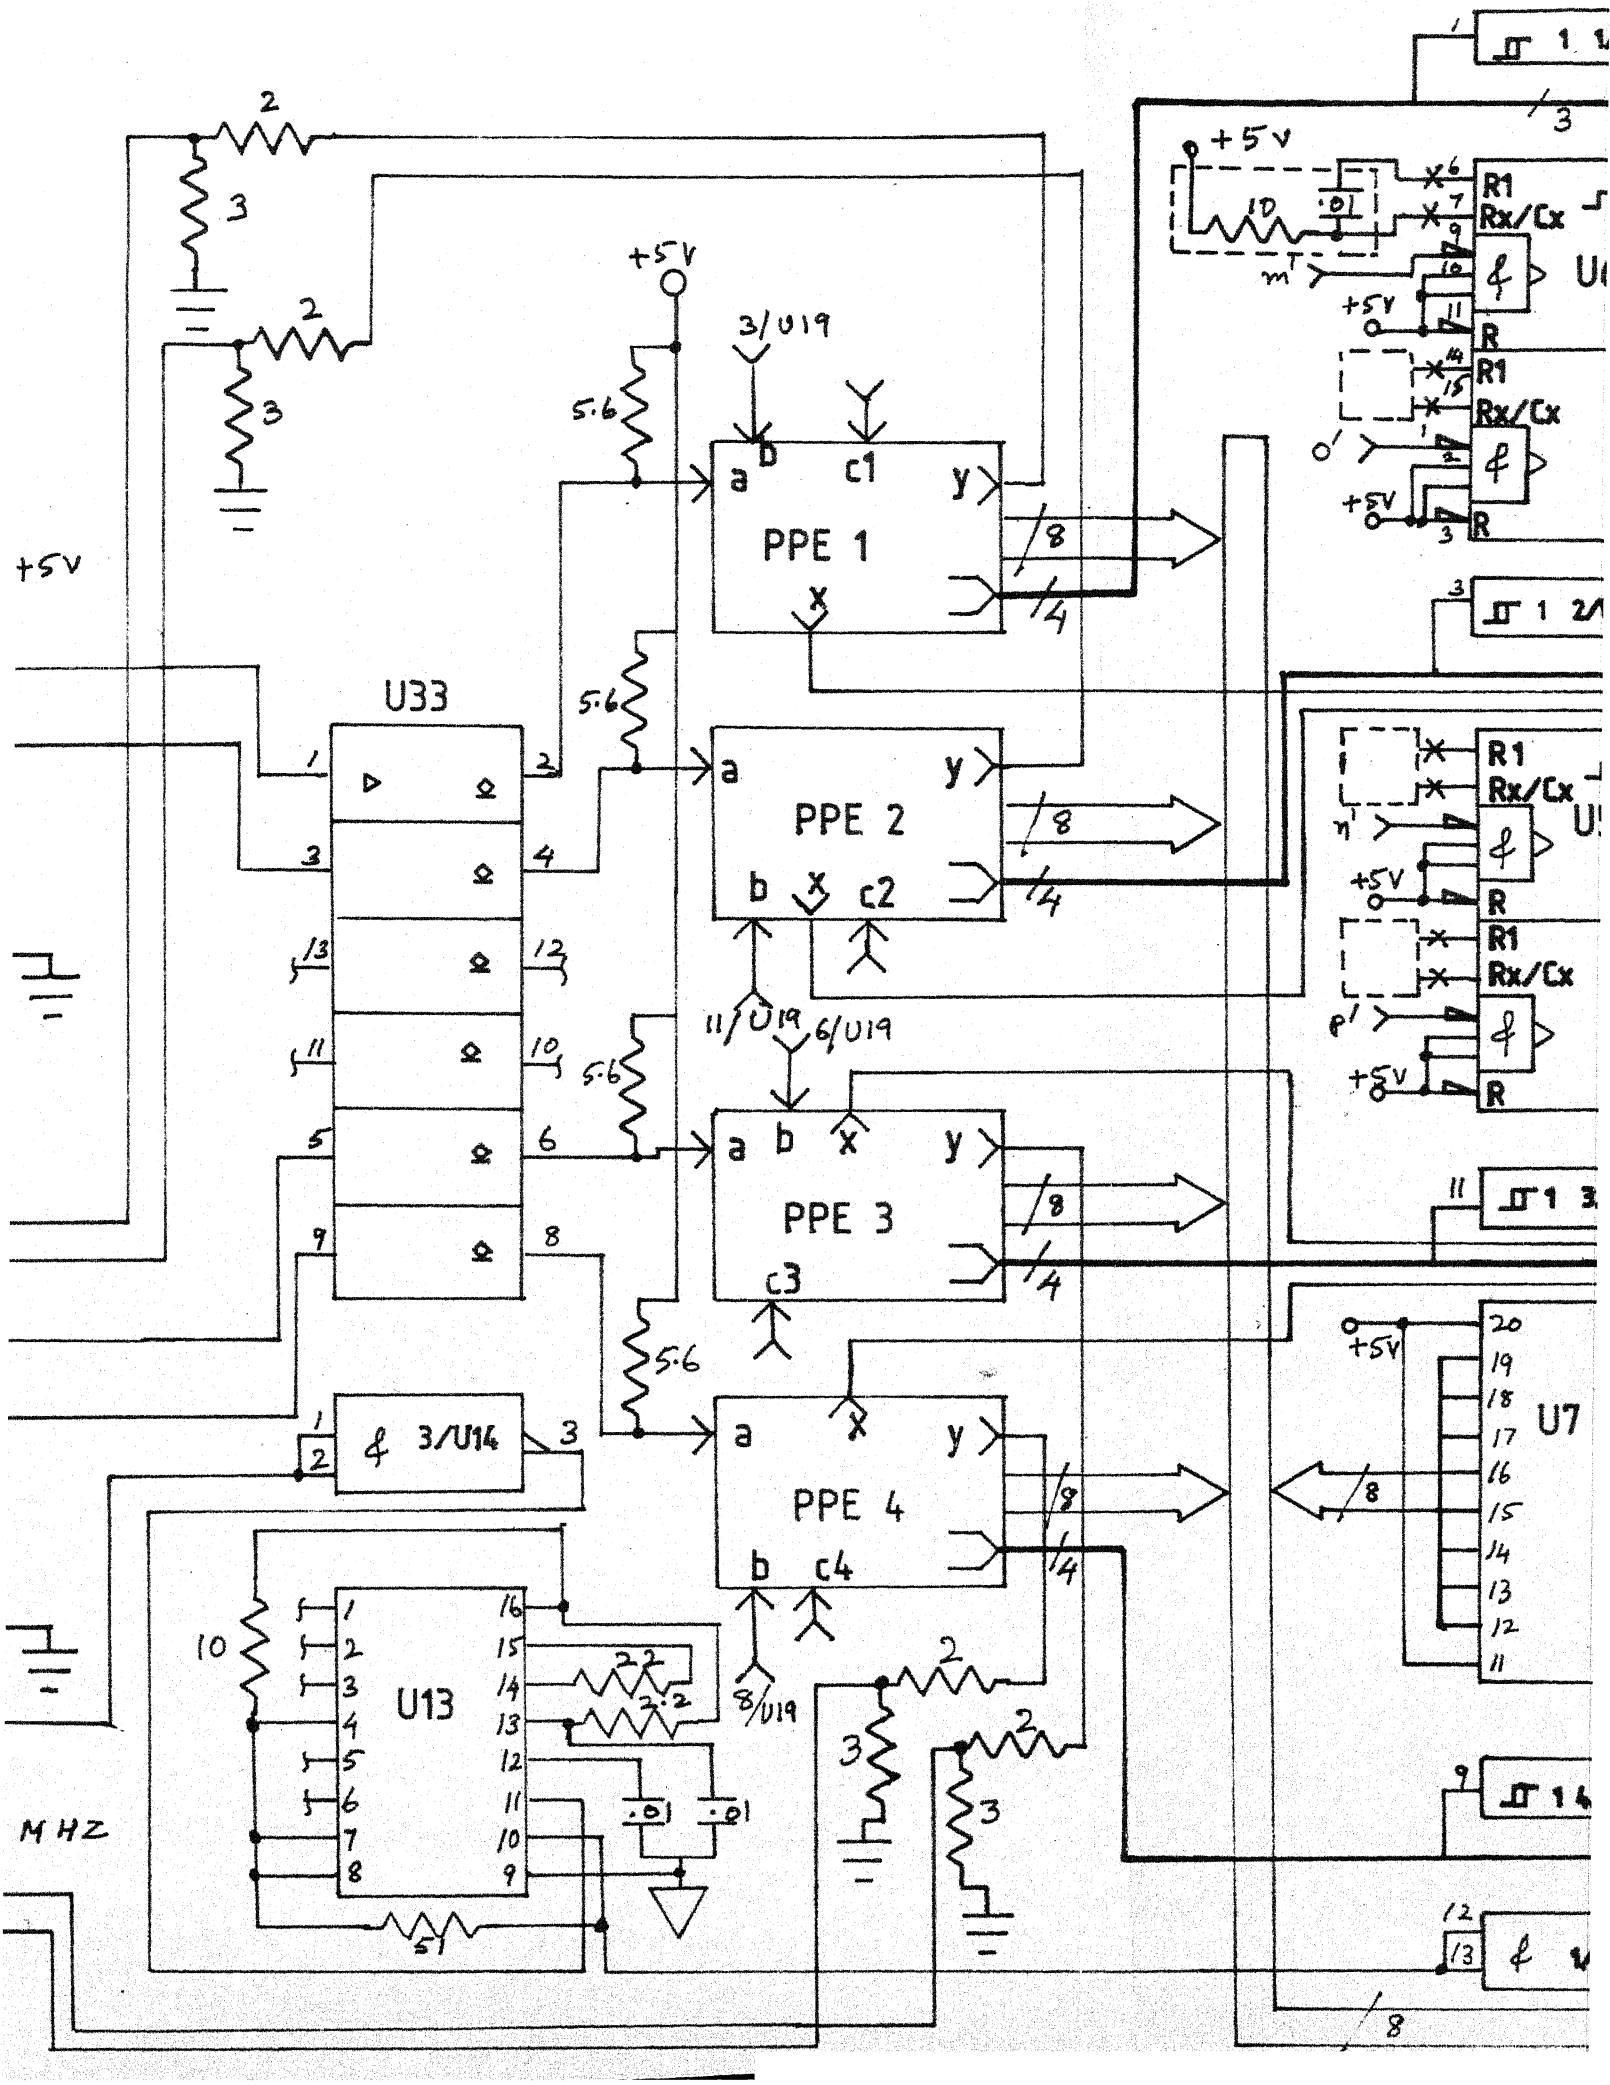
+5V
U33
PPE 1
PPE 2
PPE 3
PPE 4
3/U19
11/U19
6/U19
8/U19
3/U14
U13
U7
R1
Rx/Cx
MHZ

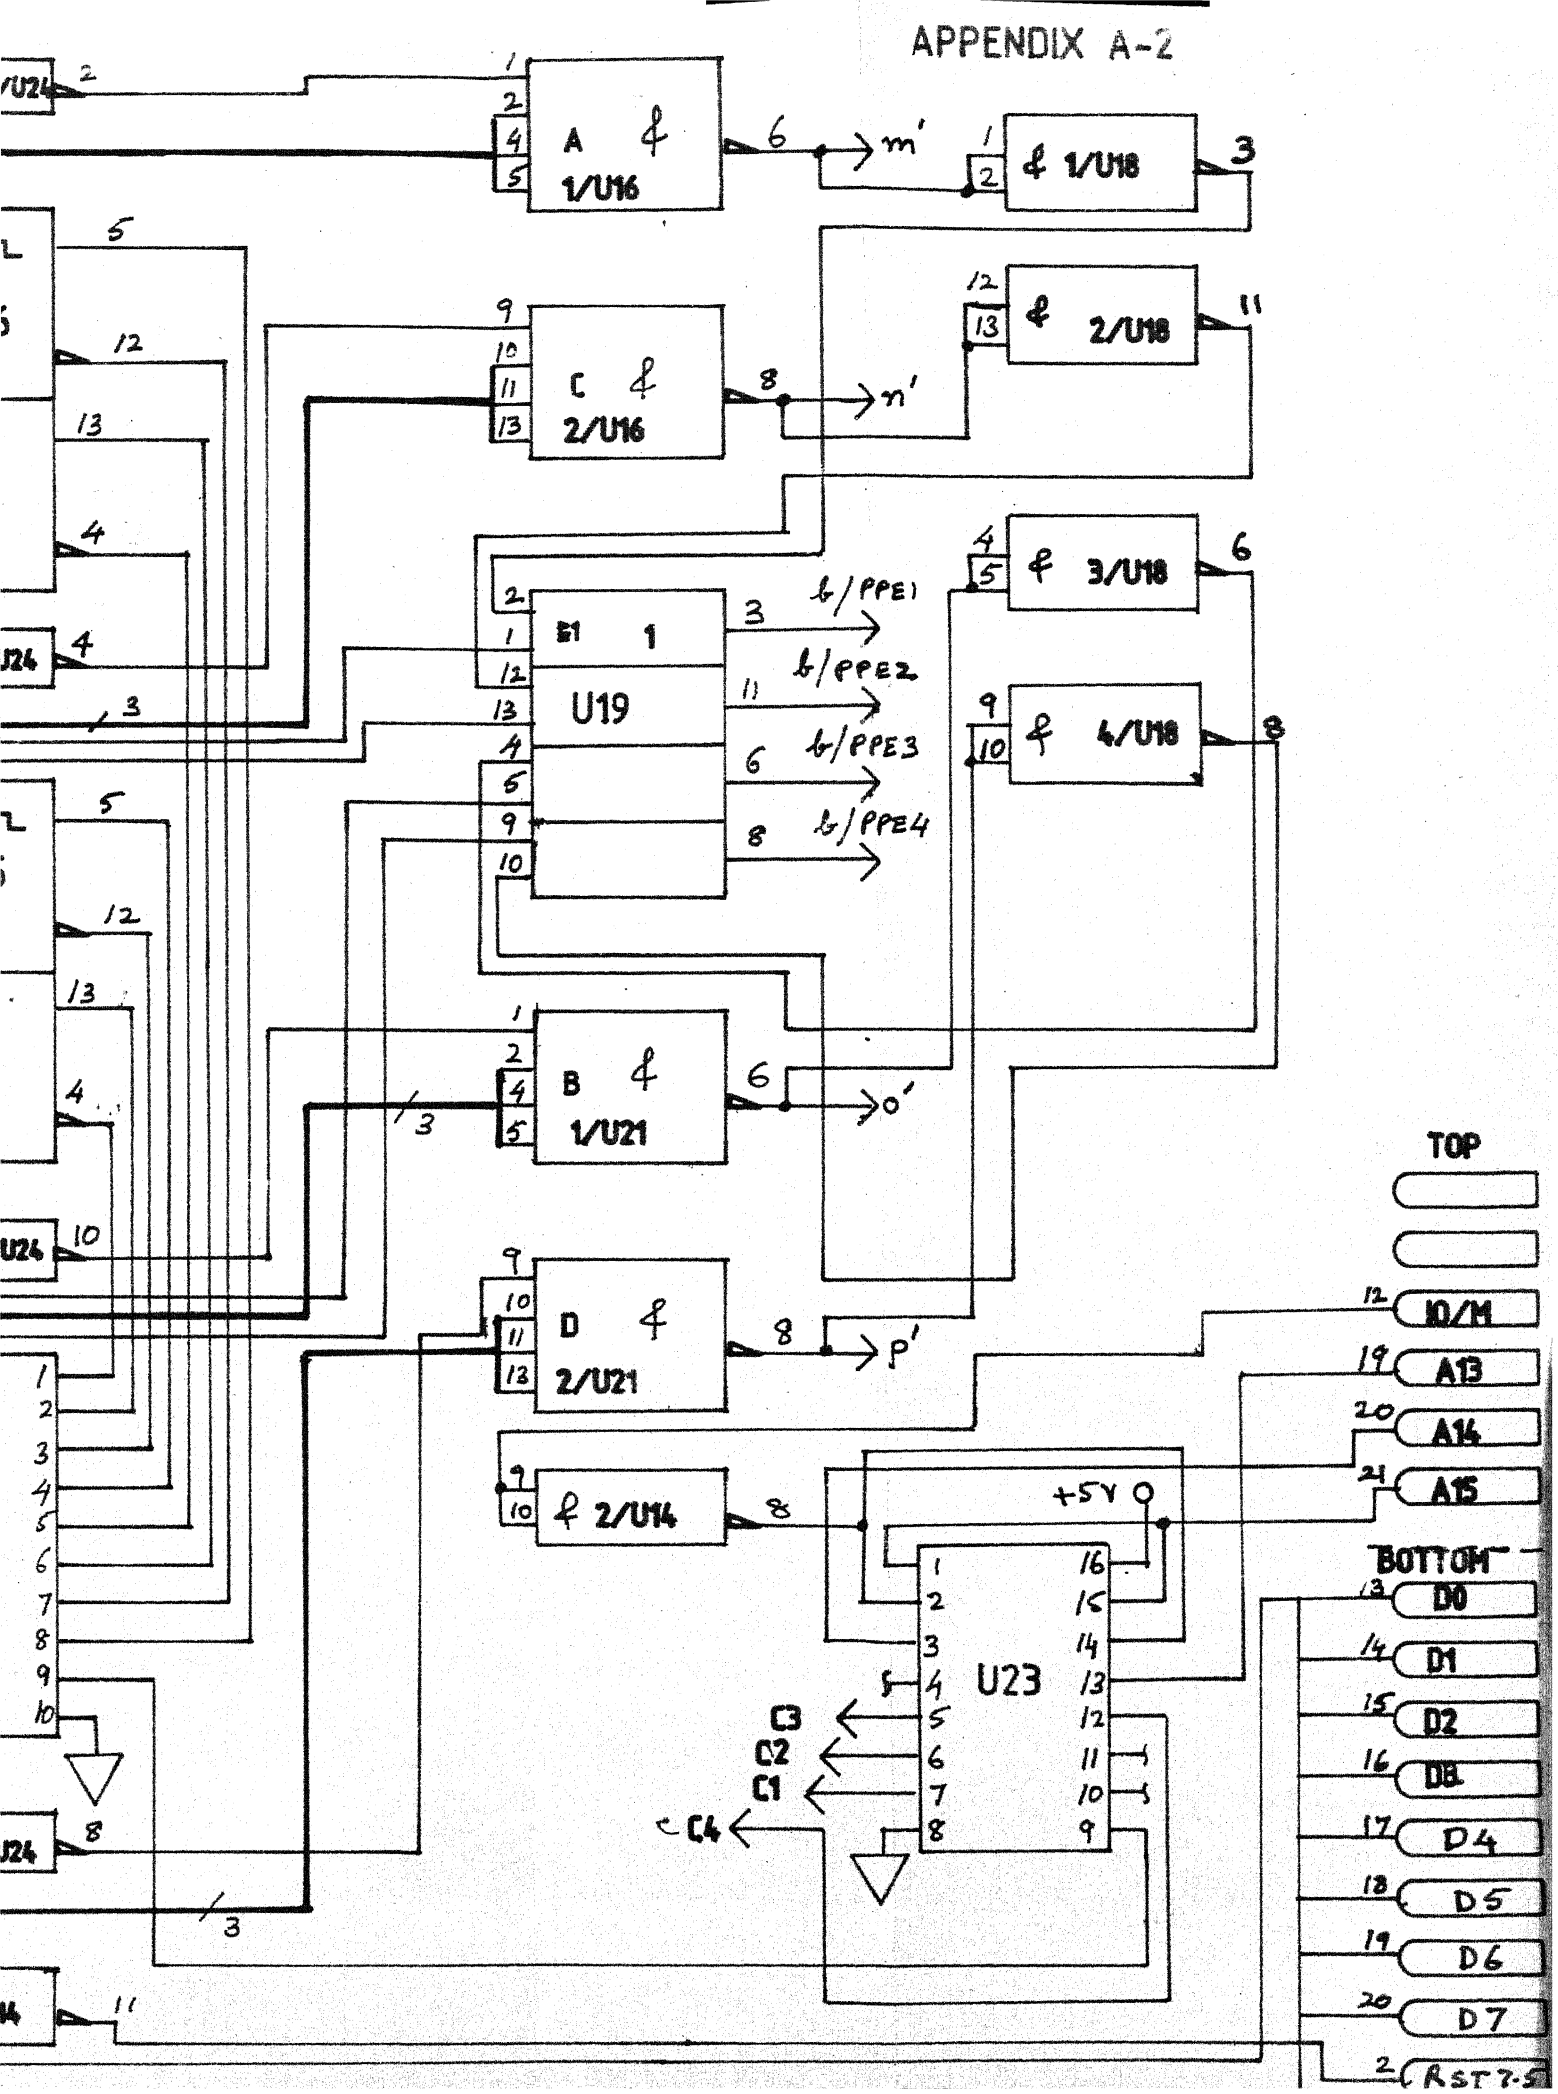
A & 1/U16
m'
& 1/U18
C & 2/U16
n'
& 2/U18
& 3/U18
& 4/U18
U19
b/PPE1
b/PPE2
b/PPE3
b/PPE4
B & 1/U21
o'
D & 2/U21
p'
& 2/U14
+5V
U23
C3
C2
C1
C4
TOP
IO/M
A13
A14
A15
BOTTOM
D0
D1
D2
D3
D4
D5
D6
D7
RST7.5

APPENDIX A-3

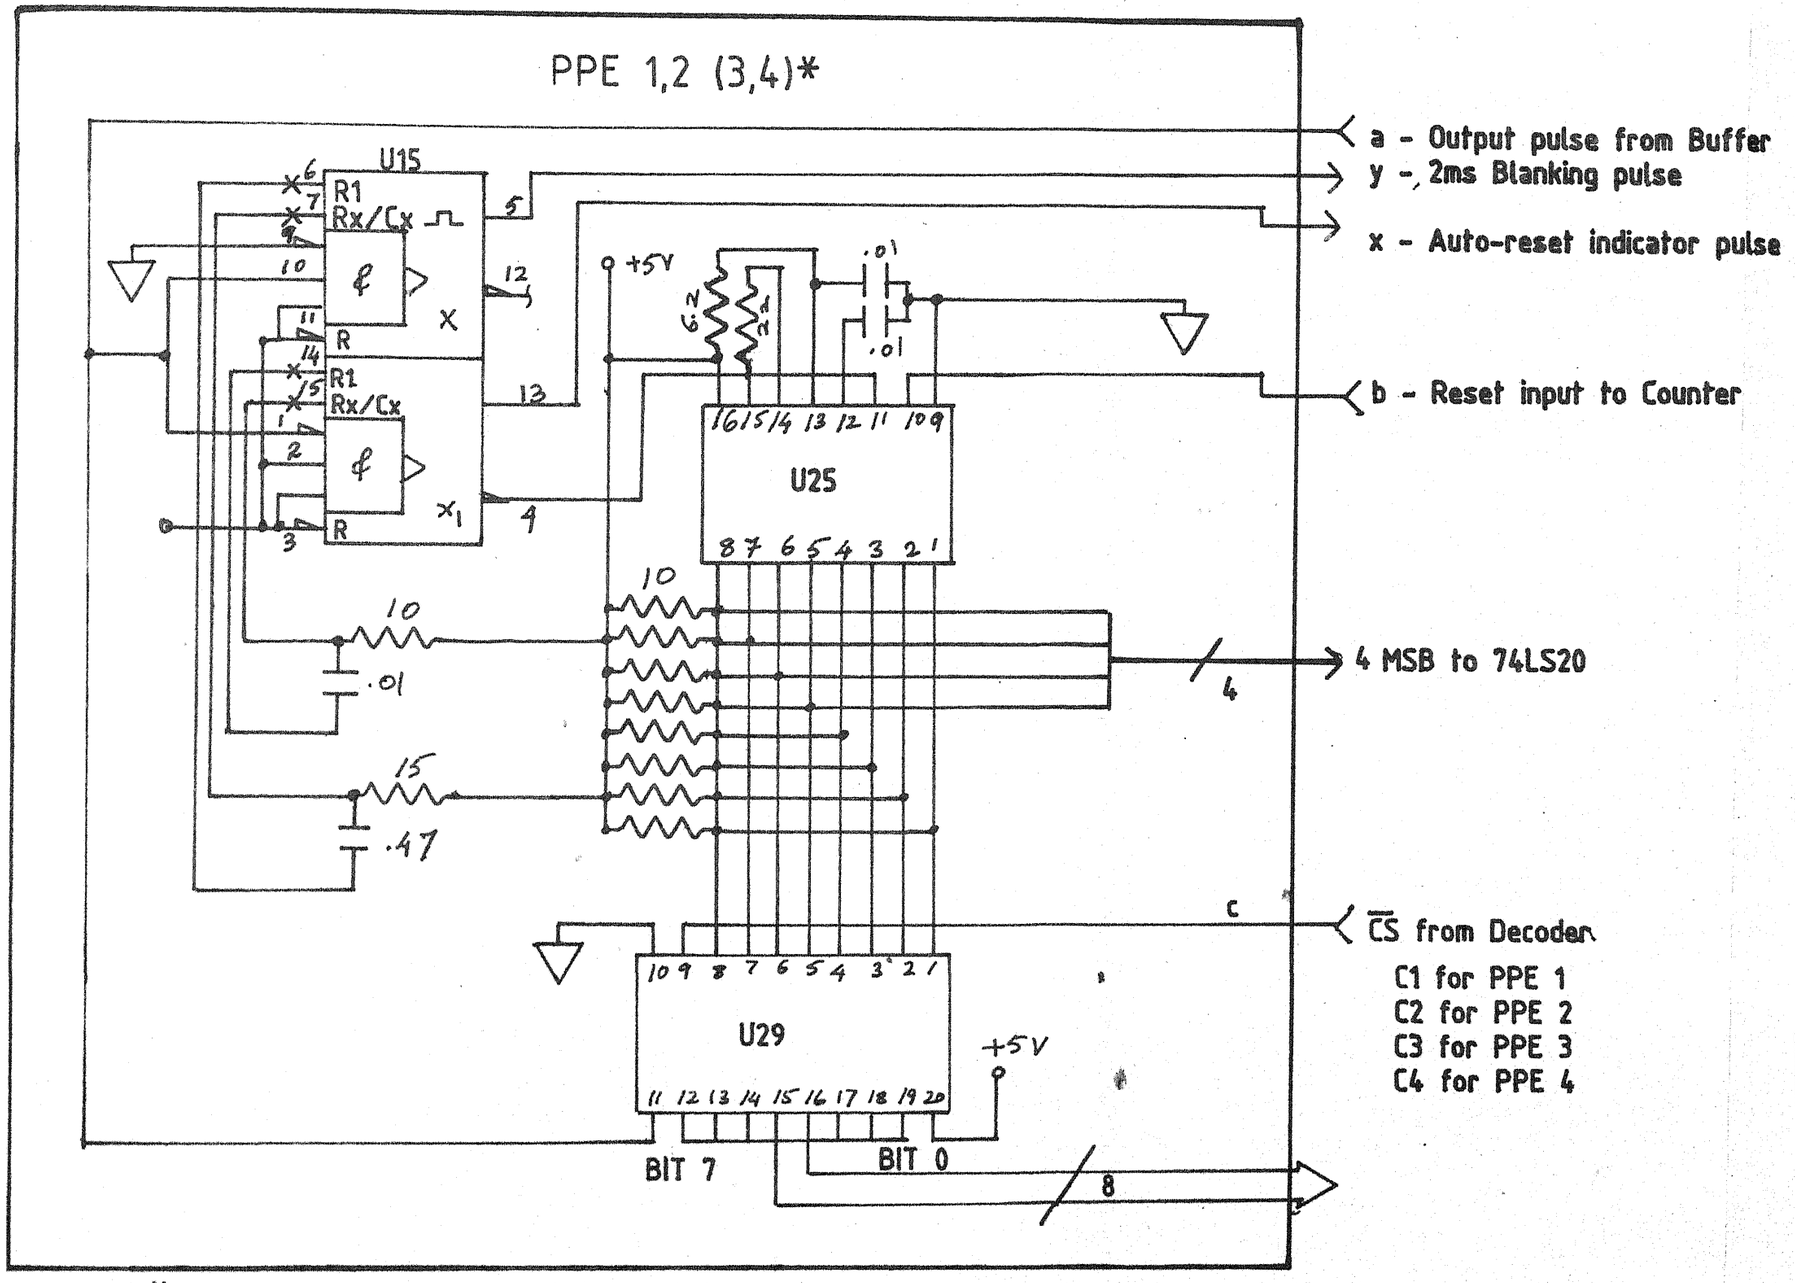

* IN PPE 3,4 PINS OF X & X1 OF 74123 ARE INTERCHANGED (U20,U22)

CIRCUIT OF A PPE

PPE 1	U15
	U25
	U29
PPE 2	U17
	U26
	U30
PPE 3	U20
	U27
	U31
PPE 4	U22
	U28
	U32

DIGITAL GROUND

ANALOG GROUND

ALL CAP IN MICROFARADS
ALL RESISTORS IN KILO OHMS

ASSEMBLER INVOKED BY: :F1:AS2920 FULFIL

```
 LINE  LOC OBJECT SOURCE STATEMENT

    1
    2                ;A/D CONVERSION ROUTINE ADDED BY MACRO ADCONV
    3     0 0066EB           SUB DAR,DAR,R00,IN0
    4     1 0000EF           IN0
    5     2 0000EF           IN0
    6     3 0000EF           IN0
    7     4 0000EF           IN0
    8     5 0000EF           IN0
    9     6 0000EF           IN0
   10     7 4000EF           NOP
   11     8 6000EF           CVT5
   12     9 4000EF      NOP
   13    10 EBE6ED           ADD DAR,KM2,R00,CND6
   14    11 4000EF           NOP
   15    12 7100EF           CVT7
   16    13 4000EF           NOP
   17    14 6100EF           CVT6
   18    15 4000EF           NOP
   19    16 5100EF           CVT5
   20    17 4000EF           NOP
   21    18 4100EF           CVT4
   22    19 4000EF           NOP
   23    20 3100EF           CVT3
   24    21 4000EF           NOP
   25    22 2100EF           CVT2
   26    23 4000EF           NOP
   27    24 1100EF           CVT1
   28    25 4000EF           NOP
   29    26 0100EF           CVT0
   30    27 4000EF           NOP
   31    28 4022EF           LDA INPUT,DAR          ;SCALE INPUT HERE
   32                ;END OF MACRO ADCONV
   33                ;THESE ARE THE SCALINGS SUGGESTED BY :CODFIL FOR THE VARIOUS INPUTS:
   34    29 4000FE LDA IN0←P0,INPUT,R08
   35    30 4400CE LDA IN0←P1,INPUT,R07
   36                IN0←P2 EQU IN0←P1
   37                IN0←P3 EQU IN0←P0
   38               OUT2←P0 EQU TEMP
   39    31 4C00FF LDA OUT2←P0,OUT1←P0,R00
   40                      ; OUT2←P0=1.00000000*OUT1←P0
   41    32 4818EF LDA OUT1←P0,OUT0←P0,R00
   42                      ; OUT1←P0=1.00000000*OUT0←P0
   43    33 42185E LDA OUT0←P0,OUT2←P0,R03
   44                      ; OUT0←P0=0.125000000*OUT2←P0
   45    34 4218FB SUB OUT0←P0,OUT2←P0,R00
   46                      ; OUT0←P0=-0.87500000*OUT2←P0
   47    35 42189D ADD OUT0←P0,OUT2←P0,R13
   48                      ; OUT0←P0=-0.87487792*OUT2←P0
   49    36 42183D ADD OUT0←P0,OUT2←P0,R10
   50                      ; OUT0←P0=-0.87390136*OUT2←P0
   51    37 4218DC ADD OUT0←P0,OUT2←P0,R07
   52                      ; OUT0←P0=-0.86608886*OUT2←P0
```

```
 LINE  LOC OBJECT SOURCE STATEMENT

   53   38 48187D ADD OUT0←P0,OUT0←P0,R12
   54                  ; OUT0←P0=-0.8663O039*OUT2←P0
   55   39 4218BA SUB OUT0←P0,OUT2←P0,R06
   56                  ; OUT0←P0=-0.88192539*OUT2←P0
   57   40 4810DD ADD OUT0←P0,OUT1←P0,L01
   58                  ; OUT0←P0=2.0000000*OUT1←P0-0.88192539*OUT2←P0
   59   41 48105A SUB OUT0←P0,OUT1←P0,R03
   60                  ; OUT0←P0=1.8750000*OUT1←P0-0.88192539*OUT2←P0
   61   42 48105B SUB OUT0←P0,OUT1←P0,R11
   62                  ; OUT0←P0=1.8745117*OUT1←P0-0.88192539*OUT2←P0
   63   43 4018FD ADD OUT0←P0,IN0←P0,R00
   64                  ; OUT0←P0=1.8745117*OUT1←P0-0.88192539*OUT2←P0+1.00000000*IN0←P0
   65              OUT2←P1 EQU TEMP
   66   44 4E00FF LDA OUT2←P1,OUT1←P1,R00
   67                  ; OUT2←P1=1.00000000*OUT1←P1
   68   45 4E18EF LDA OUT1←P1,OUT0←P1,R00
   69                  ; OUT1←P1=1.00000000*OUT0←P1
   70   46 46185E LDA OUT0←P1,OUT2←P1,R03
   71                  ; OUT0←P1=0.125000000*OUT2←P1
   72   47 4E185B SUB OUT0←P1,OUT0←P1,R11
   73                  ; OUT0←P1=0.12493896O*OUT2←P1
   74   48 1066EB SUB DAR,DAR,R00,IN1
   75   49 1E189B SUB OUT0←P1,OUT0←P1,R13,IN1
   76                  ; OUT0←P1=0.12492371O*OUT2←P1
   77   50 1618FB SUB OUT0←P1,OUT2←P1,R00,IN1
   78                  ; OUT0←P1=-0.87507626*OUT2←P1
   79   51 1E18DC ADD OUT0←P1,OUT0←P1,R07,IN1
   80                  ; OUT0←P1=-0.88191279*OUT2←P1
   81   52 1E10DD ADD OUT0←P1,OUT1←P1,L01,IN1
   82                  ; OUT0←P1=2.0000000*OUT1←P1-0.88191279*OUT2←P1
   83   53 1E105A SUB OUT0←P1,OUT1←P1,R03,IN1
   84                  ; OUT0←P1=1.8750000*OUT1←P1-0.88191279*OUT2←P1
   85   54 4E10FA SUB OUT0←P1,OUT1←P1,R08
   86                  ; OUT0←P1=1.8710937*OUT1←P1-0.88191279*OUT2←P1
   87   55 6E103B SUB OUT0←P1,OUT1←P1,R10,CVTS
   88                  ; OUT0←P1=1.8701171*OUT1←P1-0.88191279*OUT2←P1
   89   56 4E107B SUB OUT0←P1,OUT1←P1,R12
   90                  ; OUT0←P1=1.8698730*OUT1←P1-0.88191279*OUT2←P1
   91   57 EBE6ED ADD DAR,KM2,R00,CND6
   92   58 4610FD ADD OUT0←P1,IN0←P1,R00
   93                  ; OUT0←P1=1.8698730*OUT1←P1-0.88191279*OUT2←P1+1.00000000*IN0←P1
   94   59 7100EF CVT7
   95              OUT2←P2 EQU TEMP
   96              ;INCLUDE TWO INST TO TEST BITA:
   97   60 F9CACF LDA BITA,KF5,L01,CND7
   98   61 70C2EF LDA BITA,KP0,CND5
   99              ;CONTINUE FILTERING
  100   62 4428FF LDA OUT2←P2,OUT1←P2,R00
  101                  ; OUT2←P2=1.00000000*OUT1←P2
  102   63 4260FF LDA OUT1←P2,OUT0←P2,R00
  103                  ; OUT1←P2=1.00000000*OUT0←P2
  104   64 46484E LDA OUT0←P2,OUT2←P2,R03
  105                  ; OUT0←P2=0.125000000*OUT2←P2
  106   65 4648EB SUB OUT0←P2,OUT2←P2,R00
```

```
LINE  LOC OBJECT SOURCE STATEMENT

 107                    ; OUT0←P2=-0.87500000*OUT2←P2
 108   66 4660CC ADD OUT0←P2,OUT0←P2,R07
 109                    ; OUT0←P2=-0.88183593*OUT2←P2
 110   67 46606D ADD OUT0←P2,OUT0←P2,R12
 111                    ; OUT0←P2=-0.88205126*OUT2←P2
 112   68 46488D ADD OUT0←P2,OUT2←P2,R13
 113                    ; OUT0←P2=-0.88192919*OUT2←P2
 114   69 4468CD ADD OUT0←P2,OUT1←P2,L01
 115                    ; OUT0←P2=2.0000000*OUT1←P2-0.88192919*OUT2←P2
 116   70 44684A SUB OUT0←P2,OUT1←P2,R03
 117                    ; OUT0←P2=1.8750000*OUT1←P2-0.88192919*OUT2←P2
 118   71 4468AA SUB OUT0←P2,OUT1←P2,R06
 119                    ; OUT0←P2=1.8593750*OUT1←P2-0.88192919*OUT2←P2
 120   72 4468EA SUB OUT0←P2,OUT1←P2,R08
 121                    ; OUT0←P2=1.8554687*OUT1←P2-0.88192919*OUT2←P2
 122   73 44684B SUB OUT0←P2,OUT1←P2,R11
 123                    ; OUT0←P2=1.8549804*OUT1←P2-0.88192919*OUT2←P2
 124   74 44688D ADD OUT0←P2,OUT1←P2,R13
 125                    ; OUT0←P2=1.8551025*OUT1←P2-0.88192919*OUT2←P2
 126   75 4640ED ADD OUT0←P2,IN0←P2,R00
 127                    ; OUT0←P2=1.8551025*OUT1←P2-0.88192919*OUT2←P2+1.00000000*IN0←P2
 128                  OUT2←P3 EQU TEMP
 129   76 3066EB SUB DAR,DAR,R00,IN3          ;A DUMMY READ TO DISCHARGE S&H CAPACITOR
 130   77 3628FF LDA OUT2←P3,OUT1←P3,R00,IN3
 131                .   ; OUT2←P3=1.00000000*OUT1←P3
 132   78 3C60FF LDA OUT1←P3,OUT0←P3,R00,IN3
 133                    ; OUT1←P3=1.00000000*OUT0←P3
 134   79 32584E LDA OUT0←P3,OUT2←P3,R03,IN3
 135                    ; OUT0←P3=0.12500000*OUT2←P3
 136   80 3258EB SUB OUT0←P3,OUT2←P3,R00,IN3
 137                    ; OUT0←P3=-0.87500000*OUT2←P3
 138   81 3870AC ADD OUT0←P3,OUT0←P3,R06,IN3
 139                    ; OUT0←P3=-0.88867187*OUT2←P3
 140   82 48702B SUB OUT0←P3,OUT0←P3,R10
 141                    ; OUT0←P3=-0.88780400*OUT2←P3
 142   83 2066EB SUB DAR,DAR,R00,IN2          ;START ACQUIRING BITB
 143   84 2258CC ADD OUT0←P3,OUT2←P3,R07,IN2
 144                    ; OUT0←P3=-0.87999150*OUT2←P3
 145   85 22580B SUB OUT0←P3,OUT2←P3,R09,IN2
 146                    ; OUT0←P3=-0.88194462*OUT2←P3
 147   86 2278CD ADD OUT0←P3,OUT1←P3,L01,IN2
 148                    ; OUT0←P3=2.0000000*OUT1←P3-0.88194462*OUT2←P3
 149   87 22784A SUB OUT0←P3,OUT1←P3,R03,IN2
 150                    ; OUT0←P3=1.8750000*OUT1←P3-0.88194462*OUT2←P3
 151   88 22788A SUB OUT0←P3,OUT1←P3,R05,IN2
 152                    ; OUT0←P3=1.8437500*OUT1←P3-0.88194462*OUT2←P3
 153   89 42782D ADD OUT0←P3,OUT1←P3,R10
 154                    ; OUT0←P3=1.8447265*OUT1←P3-0.88194462*OUT2←P3
 155   90 627860 ADD OUT0←P3,OUT1←P3,R12,CVTS
 156                    ; OUT0←P3=1.8449707*OUT1←P3-0.88194462*OUT2←P3
 157   91 4058ED ADD OUT0←P3,IN0←P3,R00
 158                    ; OUT0←P3=1.8449707*OUT1←P3-0.88194462*OUT2←P3+1.00000000*IN0←P3
 159   92 EBE6ED ADD DAR,KMZ,CND6             ;A/D CONV INST
 160                  ;NOW THE SUM OF THE SUB FILTER OUTPUTS HAS TO BE TAKEN
```

```
 LINE  LOC OBJECT SOURCE STATEMENT

  161   93 4858FF LDA OUTPUT,OUTO←PO,ROO
  162   94 7B58FB SUB OUTPUT,OUTO←P1,ROO,CVT7
  163   95 4270FD ADD OUTPUT,OUTO←P2,ROO
  164             ;INCLUDE TWO INST TO SET BIT B
  165   96 FDDACF LDA BITB,KP5,LO1,CND7
  166   97 7402EF LDA BITB,KPO,CNDS
  167             ;CONTINUE
  168   98 4870FB SUB OUTPUT,OUTO←P3,ROO
  169   99 4878DD ADD OUTPUT,OUTPUT,LO1
  170  100 4878DF LDA OUTPUT,OUTPUT,LO1
  171  101 486CEF LDA DAR,OUTPUT
  172  102 4000EF NOP
  173  103 4000EF NOP
  174  104 4000EF NOP
  175  105 44D2FF LDA NEGVAL,KPO              ;PEAK DETECTION AND RUN DOWN SECTION
  176  106 7CDADF LDA NEGVAL,KP5,LO1,CNDS
  177  107 4C28F7 ABS TEMP,OUTPUT
  178  108 448A1A SUB TEMP,KP1,RO1             ;TO SET A THRESHOLD FOR INPUT SIGNAL LEVEL
  179  109 424CE5 LIM DAR,TEMP
  180  110 4000EF NOP
  181  111 70D2FF LDA OUTPUT,KPO,CNDS
  182  112 4829E7 ABS CEE,OUTPUT
  183  113 4281FF LDA SAVE,BEE
  184  114 4689EB SUB BEE,AYE
  185  115 42C4E5 LIM DAR,BEE
  186  116 7093EF LDA FLAG,KPO,CNDS
  187  117 F393EF LDA FLAG,KP2,CND7
  188  118 4489EF LDA BEE,SAVE
  189  119 4481EB SUB BEE,CEE
  190  120 42C4E5 LIM DAR,BEE
  191  121 F393ED ADD FLAG,KP2,CND7
  192  122 4093FF LDA PEAK,KPO
  193  123 48C4EF LDA DAR,FLAG
  194  124 4000EF NOP
  195  125 4000EF NOP
  196  126 F199FF LDA PEAK,SAVE,CND7
  197  127 4481EF LDA BEE,CEE
  198  128 4489FF LDA AYE,SAVE
  199  129 4A6CEF LDA DAR,NEGVAL
  200  130 4493EF LDA NPEAK,KPO
  201  131 4C99FF LDA PPEAK,PEAK
  202  132 F593FF LDA PPEAK,KPO,CND7
  203  133 FD99EF LDA NPEAK,PEAK,CND7
  204  134 4064EF LDA DAR,BITA
  205  135 4000EF NOP
  206  136 F593FF LDA PPEAK,KPO,CND7
  207  137 4A64EF LDA DAR,BITB
  208  138 4000EF NOP
  209  139 F593EF LDA NPEAK,KPO,CND7
  210  140 40E9EF LDA PSTORE,PCRDV
  211  141 4AC9FB SUB PCRDV,PPEAK
  212  142 40ECE5 LIM DAR,PCRDV
  213  143 4EEBEF LDA PINFO,KM1
  214  144 7EC9FF LDA POSPK,PPEAK,CNDS
```

```
 LINE  LOC OBJECT SOURCE STATEMENT

  215  145 7CCBCF LDA PINFO,KP5,LO1,CNDS
  216  146 42E4E5 LIM DAR,PINFO
  217  147 40E1FF LDA PCRDV,PSTORE
  218  148 F3E9FF LDA PCRDV,POSPK,CND7
  219  149 8000EF OUT0
  220  150 8000EF OUT0
  221  151 8000EF OUT0
  222  152 8000EF OUT0
  223  153 8000EF OUT0
  224  154 8000EF OUT0
  225  155 48F9EF LDA NSTORE,NCRDV
  226  156 4AD1FB SUB NCRDV,NPEAK
  227  157 48ECE5 LIM DAR,NCRDV
  228  158 4EFBEF LDA NINFO,KM1
  229  159 7ED1FF LDA NEGPK,NPEAK,CNDS
  230  160 7CDBCF LDA NINFO,KP5,LO1,CNDS
  231  161 4AE4E5 LIM DAR,NINFO
  232  162 48F1FF LDA NCRDV,NSTORE
  233  163 FBF9FF LDA NCRDV,NEGPK,CND7
  234  164 A000EF OUT2
  235  165 A000EF OUT2
  236  166 A000EF OUT2
  237  167 A000EF OUT2
  238  168 A000EF OUT2
  239  169 A000EF OUT2
  240  170 4064EF LDA DAR,BITA
  241  171 4000EF NOP
  242  172 F3E9FF LDA PCRDV,POSPK,CND7
  243  173 4A64EF LDA DAR,BITB
  244  174 40ACEF LDA PY,PCRDV
  245  175 FBF9FF LDA NCRDV,NEGPK,CND7
  246  176 40ACAA SUB PY,PCRDV,R06
  247  177 40AC0B SUB PY,PCRDV,R09
  248  178 40064D ADD PY,PY,R11
  249             ;PY=.9829106*PCRDV----------THE ACTUAL FACTOR DESIRED WAS 0.9828206
  250  179 4043FF LDA PCRDV,PY       ;PCRDV HAS LATEST RUNDOWN VALUE
  251  180 48ACFF LDA NY,NCRDV
  252  181 48ACBA SUB NY,NCRDV,R06
  253  182 48AC1B SUB NY,NCRDV,R09
  254  183 400E5D ADD NY,NY,R11
  255             ;NY=.98291056*NCRDV-------THE SAME ERROR EXSITS
  256  184 405BFF LDA NCRDV,NY       ;NCRDV HAS NOW THE LATEST RUNDOWN VALUE FOR NEGATIVE PEAKS
  257  185 4000EF NOP
  258  186 4000EF NOP
  259  187 4000EF NOP
  260  188 5000EF EDP
  261  189 4000EF NOP
  262  190 4000EF NOP
  263  191 4000EF NOP
  264             END


SYMBOL:                         VALUE:
```

```
INPUT
INO←PO                    0
INO←P1                    1
INO←P2                    2
INO←P3                    2
OUT2←PO                   1
TEMP                      3
OUT1←PO                   3
OUTO←PO                   4
OUT2←P1                   5
OUT1←P1                   3
OUTO←P1                   6
OUT2←P2                   7
BITA                      3
OUT1←P2                   8
OUTO←P2                   9
OUT2←P3                  10
OUT1←P3                   3
OUTO←P3                  11
OUTPUT                   12
BITB                     13
NEGVAL                   14
CEE                      15
SAVE                     16
BEE                      17
AYE                      18
FLAG                     19
PEAK                     20
NPEAK                    21
PPEAK                    22
PSTORE                   23
PCRDV                    24
PINFO                    25
POSPK                    26
NSTORE                   27
NCRDV                    28
NINFO                    29
NEGPK                    30
PY                       31
NY                       32

ASSEMBLY COMPLETE
ERRORS     =     0
WARNINGS   =     0
RAMSIZE    =    34
ROMSIZE    =   192
```

ASSEMBLER INVOKED BY: :F1:AS2920 FINFIL

```
 LINE  LOC OBJECT SOURCE STATEMENT

    1
    2                ;A/D CONVERSION ROUTINE ADDED BY MACRO ADCONV
    3     0 0066EB           SUB DAR,DAR,R00,IN0
    4     1 0000EF           IN0
    5     2 0000EF           IN0
    6     3 0000EF           IN0
    7     4 0000EF           IN0
    8     5 0000EF           IN0
    9     6 0000EF           IN0
   10     7 4000EF           NOP
   11     8 6000EF           CVT5
   12     9 EBE6ED           ADD DAR,KM2,R00,CND6
   13    10 4000EF           NOP
   14    11 7100EF           CVT7
   15    12 4000EF           NOP
   16    13 6100EF           CVT6
   17                OUT2←P0 EQU TEMP
   18    14 4008EF LDA OUT2←P0,OUT1←P0,R00,NOP
   19                      ; OUT2←P0=1.00000000*OUT1←P0
   20    15 5300FF LDA OUT1←P0,OUT0←P0,R00,CVT5
   21                      ; OUT1←P0=1.00000000*OUT0←P0
   22    16 44004E LDA OUT0←P0,OUT2←P0,R03,NOP
   23                      ; OUT0←P0=0.125000000*OUT2←P0
   24    17 4500EB SUB OUT0←P0,OUT2←P0,R00,CVT4
   25                      ; OUT0←P0=-0.87500000*OUT2←P0
   26    18 46008A SUB OUT0←P0,OUT0←P0,R05,NOP
   27                      ; OUT0←P0=-0.84765625*OUT2←P0
   28    19 37002B SUB OUT0←P0,OUT0←P0,R10,CVT3
   29                      ; OUT0←P0=-0.84682841*OUT2←P0
   30    20 4400CA SUB OUT0←P0,OUT2←P0,R07,NOP
   31                      ; OUT0←P0=-0.85464091*OUT2←P0
   32    21 2508CD ADD OUT0←P0,OUT1←P0,L01,CVT2
   33                      ; OUT0←P0=2.0000000*OUT1←P0-0.85464091*OUT2←P0
   34    22 44084A SUB OUT0←P0,OUT1←P0,R03,NOP
   35                      ; OUT0←P0=1.8750000*OUT1←P0-0.85464091*OUT2←P0
   36    23 15086A SUB OUT0←P0,OUT1←P0,R04,CVT1
   37                      ; OUT0←P0=1.8125000*OUT1←P0-0.85464091*OUT2←P0
   38    24 4408AC ADD OUT0←P0,OUT1←P0,R06,NOP
   39                      ; OUT0←P0=1.8281250*OUT1←P0-0.85464091*OUT2←P0
   40    25 05080B SUB OUT0←P0,OUT1←P0,R09,CVT0
   41                      ; OUT0←P0=1.8261718*OUT1←P0-0.85464091*OUT2←P0
   42    26 4000EF NOP
   43    27 4422FF LDA INPUT,DAR
   44    28 4218CE LDA IN0←P0,INPUT,R07              ;INPUT SCALING IS EFECTED HERE
   45    29 4218BE LDA IN0←P1,INPUT,R06
   46                IN0←P2 EQU IN0←P1
   47                IN0←P3 EQU IN0←P1
   48                IN0←P4 EQU IN0←P1
   49                IN0←P5 EQU IN0←P1
   50    30 4C00ED ADD OUT0←P0,IN0←P0,R00
   51                      ; OUT0←P0=1.8261718*OUT1←P0-0.85464091*OUT2←P0+1.00000000*IN0←P0
   52                OUT2←P1 EQU TEMP
```

```
 LINE   LOC OBJECT SOURCE STATEMENT

   53    31 4A00EF LDA OUT2←P1,OUT1←P1,R00
   54                    ; OUT2←P1=1.00000000*OUT1←P1
   55    32 4E16EF LDA OUT1←P1,OUT0←P1,R00
   56                    ; OUT1←P1=1.00000000*OUT0←P1
   57    33 4E107E LDA OUT0←P1,OUT1←P1,R04
   58                    ; OUT0←P1=0.062500000*OUT1←P1
   59    34 4E103A SUB OUT0←P1,OUT1←P1,R02
   60                    ; OUT0←P1=-0.18750000*OUT1←P1
   61    35 4E10DD ADD OUT0←P1,OUT1←P1,L01
   62                    ; OUT0←P1=1.8125000*OUT1←P1
   63    36 4E185D ADD OUT0←P1,OUT0←P1,R11                                                    .0000000
   64                    ; OUT0←P1=1.8133850*OUT1←P1
   65    37 4410FB SUB OUT0←P1,OUT2←P1,R00
   66                    ; OUT0←P1=1.8133850*OUT1←P1-1.00000000*OUT2←P1
   67    38 44105C ADD OUT0←P1,OUT2←P1,R03
   68                    ; OUT0←P1=1.8133850*OUT1←P1-0.87500000*OUT2←P1
   69    39 4410BC ADD OUT0←P1,OUT2←P1,R06
   70                    ; OUT0←P1=1.8133850*OUT1←P1-0.85937500*OUT2←P1
   71    40 4410FC ADD OUT0←P1,OUT2←P1,R08
   72                    ; OUT0←P1=1.8133850*OUT1←P1-0.85546875*OUT2←P1
   73    41 44103D ADD OUT0←P1,OUT2←P1,R10
   74                    ; OUT0←P1=1.8133850*OUT1←P1-0.85449218*OUT2←P1
   75    42 44109B SUB OUT0←P1,OUT2←P1,R13
   76                    ; OUT0←P1=1.8133850*OUT1←P1-0.85461425*OUT2←P1
   77    43 4C18FD ADD OUT0←P1,IN0←P1,R00
   78    44 1066EB SUB DAR,DAR,IN1                        ;START ACQUIRING BIT A
   79                    ; OUT0←P1=1.8133850*OUT1←P1-0.85461425*OUT2←P1+1.00000000*IN0←P1
   80                OUT2←P2 EQU TEMP
   81    45 1020EF LDA OUT2←P2,OUT1←P2,R00,IN1
   82                    ; OUT2←P2=1.00000000*OUT1←P2
   83    46 1068EF LDA OUT1←P2,OUT0←P2,R00,IN1
   84                    ; OUT1←P2=1.00000000*OUT0←P2
   85    47 10405E LDA OUT0←P2,OUT2←P2,R03,IN1
   86                    ; OUT0←P2=0.125000000*OUT2←P2
   87    48 1040FB SUB OUT0←P2,OUT2←P2,R00,IN1
   88                    ; OUT0←P2=-0.87500000*OUT2←P2
   89    49 1068DA SUB OUT0←P2,OUT0←P2,R07,IN1
   90                    ; OUT0←P2=-0.86816406*OUT2←P2                                  0000000
   91    50 1068DA SUB OUT0←P2,OUT0←P2,R07,IN1
   92                    ; OUT0←P2=-0.86138154*OUT2←P2
   93    51 4068DA SUB OUT0←P2,OUT0←P2,R07,NOP
   94                    ; OUT0←P2=-0.85465195*OUT2←P2
   95    52 6060DD ADD OUT0←P2,OUT1←P2,L01,CVTS
   96                    ; OUT0←P2=2.0000000*OUT1←P2-0.85465195*OUT2←P2
   97    53 40603A SUB OUT0←P2,OUT1←P2,R02
   98                    ; OUT0←P2=1.7500000*OUT1←P2-0.85465195*OUT2←P2
   99    54 EBE6ED ADD DAR,KM2,R00,CND6                      ;A/D CONV INST
  100    55 40609C ADD OUT0←P2,OUT1←P2,R05,NOP
  101                    ; OUT0←P2=1.7812500*OUT1←P2-0.85465195*OUT2←P2
  102    56 71601B SUB OUT0←P2,OUT1←P2,R09,CVT7
  103                    ; OUT0←P2=1.7792968*OUT1←P2-0.85465195*OUT2←P2
  104    57 40607D ADD OUT0←P2,OUT1←P2,R12
  105                    ; OUT0←P2=1.7795410*OUT1←P2-0.85465195*OUT2←P2
  106                ;INCLUDE TWO INST TO SET BIT A
```

```
LINE  LOC OBJECT SOURCE STATEMENT

 107   58 FDCACF LDA BITA,KP5,LO1,CND7
 108   59 74C2EF LDA BITA,KP0,R00,CND5
 109             ;CONTINUE FILTERING
 110   60 4848FD ADD OUT0←P2,IN0←P2,R00
 111             ; OUT0←P2=1.7795410*OUT1←P2-0.85465195*OUT2←P2+1.00000000*IN0←P2
 112             OUT2←P3 EQU TEMP
 113   61 3228EF LDA OUT2←P3,OUT1←P3,R00,IN3
 114             ; OUT2←P3=1.00000000*OUT1←P3
 115   62 3C60FF LDA OUT1←P3,OUT0←P3,R00,IN3
 116             ; OUT1←P3=1.00000000*OUT0←P3
 117   63 30504E LDA OUT0←P3,OUT2←P3,R03,IN3                                    .0000000
 118             ; OUT0←P3=0.125000000*OUT2←P3
 119   64 3050EB SUB OUT0←P3,OUT2←P3,R00,IN3
 120             ; OUT0←P3=-0.87500000*OUT2←P3
 121   65 3870AA SUB OUT0←P3,OUT0←P3,R06,IN3
 122             ; OUT0←P3=-0.86132812*OUT2←P3
 123   66 30502D ADD OUT0←P3,OUT2←P3,R10,IN3
 124             ; OUT0←P3=-0.86035156*OUT2←P3
 125   67 4870CA SUB OUT0←P3,OUT0←P3,R07
 126             ; OUT0←P3=-0.85363007*OUT2←P3
 127   68 40502B SUB OUT0←P3,OUT2←P3,R10
 128             ; OUT0←P3=-0.85460664*OUT2←P3
 129   69 4278CD ADD OUT0←P3,OUT1←P3,LO1
 130             ; OUT0←P3=2.0000000*OUT1←P3-0.85460664*OUT2←P3
 131   70 42782A SUB OUT0←P3,OUT1←P3,R02
 132             ; OUT0←P3=1.7500000*OUT1←P3-0.85460664*OUT2←P3
 133   71 4278AA SUB OUT0←P3,OUT1←P3,R06
 134             ; OUT0←P3=1.7343750*OUT1←P3-0.85460664*OUT2←P3
 135   72 42786D ADD OUT0←P3,OUT1←P3,R12
 136             ; OUT0←P3=1.7346191*OUT1←P3-0.85460664*OUT2←P3
 137   73 4858ED ADD OUT0←P3,IN0←P3,R00
 138             ; OUT0←P3=1.7346191*OUT1←P3-0.85460664*OUT2←P3+1.00000000*IN0←P3
 139             OUT2←P4 EQU TEMP
 140   74 2066EB SUB DAR,DAR,R00,IN2                    ;START ACQUIRING BIT B
 141   75 2828EF LDA OUT2←P4,OUT1←P4,R00,IN2
 142             ; OUT2←P4=1.00000000*OUT1←P4
 143   76 2A70FF LDA OUT1←P4,OUT0←P4,R00,IN2
 144             ; OUT1←P4=1.00000000*OUT0←P4                                    0000000
 145   77 2C780C ADD OUT0←P4,OUT1←P4,R01,IN2
 146             ; OUT0←P4=1.00000000*OUT0←P4+0.50000000*OUT1←P4
 147   78 2C784C ADD OUT0←P4,OUT1←P4,R03,IN2
 148             ; OUT0←P4=1.00000000*OUT0←P4+0.62500000*OUT1←P4
 149   79 2E708C ADD OUT0←P4,OUT0←P4,R05,IN2
 150             ; OUT0←P4=1.03125000*OUT0←P4+0.64453125*OUT1←P4
 151   80 4E700D ADD OUT0←P4,OUT0←P4,R09
 152             ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4
 153   81 6450EB SUB OUT0←P4,OUT2←P4,R00,CVT5
 154             ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-1.00000000*OUT2←P4
 155   82 44504C ADD OUT0←P4,OUT2←P4,R03
 156             ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-0.87500000*OUT2←P4
 157   83 EBE6ED ADD DAR,KM2,CND6                        ;A/D CONV INST
 158   84 4450AC ADD OUT0←P4,OUT2←P4,R06
 159             ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-0.85937500*OUT2←P4
 160   85 7550EC ADD OUT0←P4,OUT2←P4,R08,CVT7
```

```
LINE  LOC OBJECT SOURCE STATEMENT

 161                    ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-0.85546875*OUT2←P4
 162   86 44502D ADD OUT0←P4,OUT2←P4,R10
 163                    ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-0.85449218*OUT2←P4
 164                ;INCLUDE TWO INST HERE TO SET BIT B
 165   87 FDDADF LDA BITB,KP5,L01,CND7
 166   88 74D2FF LDA BITB,KP0,CND5
 167                ;CONTINUE FILTERING
 168   89 44508B SUB OUT0←P4,OUT2←P4,R13
 169                    ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-0.85461425*OUT2←P4
 170   90 4C58ED ADD OUT0←P4,IN0←P4,R00
 171                    ; OUT0←P4=1.03326416*OUT0←P4+0.64579008*OUT1←P4-0.85461425*OUT2←P4+1.00000000*IN0←P4
 172                OUT2←P5 EQU TEMP
 173   91 4080EF LDA OUT2←P5,OUT1←P5,R00
 174                    ; OUT2←P5=1.00000000*OUT1←P5
 175   92 4089EF LDA OUT1←P5,OUT0←P5,R00
 176                    ; OUT1←P5=1.00000000*OUT0←P5
 177   93 40811C ADD OUT0←P5,OUT1←P5,R01
 178                    ; OUT0←P5=1.00000000*OUT0←P5+0.50000000*OUT1←P5
 179   94 40891B SUB OUT0←P5,OUT0←P5,R09
 180                    ; OUT0←P5=0.99804687*OUT0←P5+0.49902343*OUT1←P5
 181   95 40815C ADD OUT0←P5,OUT1←P5,R03
 182                    ; OUT0←P5=0.99804687*OUT0←P5+0.62402343*OUT1←P5
 183   96 4089BC ADD OUT0←P5,OUT0←P5,R06
 184                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5
 185   97 4001FB SUB OUT0←P5,OUT2←P5,R00
 186                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-1.00000000*OUT2←P5
 187   98 40015C ADD OUT0←P5,OUT2←P5,R03
 188                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-0.87500000*OUT2←P5
 189   99 4001BC ADD OUT0←P5,OUT2←P5,R06
 190                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-0.85937500*OUT2←P5
 191  100 4001FC ADD OUT0←P5,OUT2←P5,R08
 192                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-0.85546875*OUT2←P5
 193  101 40013D ADD OUT0←P5,OUT2←P5,R10
 194                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-0.85449218*OUT2←P5
 195  102 40019B SUB OUT0←P5,OUT2←P5,R13
 196                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-0.85461425*OUT2←P5
 197  103 4809FD ADD OUT0←P5,IN0←P5,R00
 198                    ; OUT0←P5=1.01364135*OUT0←P5+0.63377382*OUT1←P5-0.85461425*OUT2←P5+1.00000000*IN0←P5
 199  104 4601EF LDA OUTPUT,OUT0←P0
 200  105 4E09EB SUB OUTPUT,OUT0←P1
 201  106 4429ED ADD OUTPUT,OUT0←P2
 202  107 4C21EB SUB OUTPUT,OUT0←P3
 203  108 4E21ED ADD OUTPUT,OUT0←P4
 204  109 4489EB SUB OUTPUT,OUT0←P5
 205  110 4681AD ADD OUTPUT,OUTPUT,L02
 206  111 46810C ADD OUTPUT,OUTPUT,R01
 207  112 42C4EF LDA DAR,OUTPUT
 208  113 4000EF NOP
 209  114 4483FF LDA NEGVAL,KP0              ;PEAK DETECTION AND RUN DOWN SECTION
 210  115 7C8BDF LDA NEGVAL,KP5,L01,CND5
 211  116 4280E7 ABS TEMP,OUTPUT
 212  117 408A0A SUB TEMP,KP1,R01            ;TO SET A THRESHOLD
 213  118 4044E5 LIM DAR,TEMP
 214  119 4000EF NOP
```

```
LINE   LOC OBJECT SOURCE STATEMENT

  215   120 7483EF LDA OUTPUT,KP0,CND5
  216   121 4291E7 ABS CEE,OUTPUT
  217   122 4A91FF LDA SAVE,BEE
  218   123 4E99EB SUB BEE,AYE
  219   124 4AC4E5 LIM DAR,BEE
  220   125 70C3EF LDA FLAG,KP0,CND5
  221   126 F3C3EF LDA FLAG,KP2,CND7
  222   127 4C99EF LDA BEE,SAVE
  223   128 4C91EB SUB BEE,CEE
  224   129 4AC4E5 LIM DAR,BEE
  225   130 F3C3ED ADD FLAG,KP2,CND7
  226   131 40C3FF LDA PEAK,KP0
  227   132 40E4EF LDA DAR,FLAG
  228   133 4000EF NOP
  229   134 F9C9FF LDA PEAK,SAVE,CND7
  230   135 4C91EF LDA BEE,CEE
  231   136 4C99FF LDA AYE,SAVE
  232   137 42CCEF LDA DAR,NEGVAL
  233   138 44C3EF LDA NPEAK,KP0
  234   139 44E9FF LDA PPEAK,PEAK
  235   140 F5C3FF LDA PPEAK,KP0,CND7
  236   141 F5E9EF LDA NPEAK,PEAK,CND7
  237   142 4264EF LDA DAR,BITA
  238   143 4000EF NOP
  239   144 F5C3FF LDA PPEAK,KP0,CND7
  240   145 4A6CEF LDA DAR,BITB
  241   146 4000EF NOP
  242   147 F5C3EF LDA NPEAK,KP0,CND7
  243   148 48F9EF LDA PSTORE,PCRDV
  244   149 42F9FB SUB PCRDV,PPEAK
  245   150 48ECE5 LIM DAR,PCRDV
  246   151 4EFBEF LDA PINFO,KM1
  247   152 76F9FF LDA POSPK,PPEAK,CND5
  248   153 7EDBCF LDA PINFO,KP7,LO1,CND5
  249   154 4AE4E5 LIM DAR,PINFO
  250   155 48F1FF LDA PCRDV,PSTORE
  251   156 FBF9FF LDA PCRDV,POSPK,CND7
  252   157 8000EF OUT0
  253   158 8000EF OUT0
  254   159 8000EF OUT0
  255   160 8000EF OUT0
  256   161 800EEF LDA NSTORE,NCRDV,OUT0
  257   162 82A4FB SUB NCRDV,NPEAK,OUT0
  258   163 404EE5 LIM DAR,NCRDV
  259   164 4EAEEF LDA NINFO,KM1
  260   165 76A4FF LDA NEGPK,NPEAK,CND5
  261   166 7E8ECF LDA NINFO,KP7,LO1,CND5
  262   167 4246E5 LIM DAR,NINFO
  263   168 4006FF LDA NCRDV,NSTORE
  264   169 F30EFF LDA NCRDV,NEGPK,CND7
  265   170 A000EF OUT2
  266   171 A000EF OUT2
  267   172 A000EF OUT2
  268   173 A000EF OUT2
```

```
 LINE  LOC OBJECT SOURCE STATEMENT

  269  174 A000EF OUT2
  270  175 A000EF OUT2
  271  176 4264EF LDA DAR,BITA
  272  177 4000EF NOP
  273  178 FBF9FF LDA PCRDV,POSPK,CND7
  274  179 4A6CEF LDA DAR,BITB
  275  180 48BCEF LDA PY,PCRDV
  276  181 F30EFF LDA NCRDV,NEGPK,CND7
  277  182 48BCAA SUB PY,PCRDV,R06
  278  183 48BC0B SUB PY,PCRDV,R09
  279  184 48164D ADD PY,PY,R11
  280             ;PY=.9829106*PCRDV---------THE ACTUAL FACTOR DESIRED WAS 0.9828206
  281  185 4853FF LDA PCRDV,PY       ;PCRDV HAS LATEST RUNDOWN VALUE
  282  186 401EFF LDA NY,NCRDV
  283  187 401EBA SUB NY,NCRDV,R06
  284  188 501E1B SUB NY,NCRDV,R09,EOP
  285  189 481E5D ADD NY,NY,R11,NOP
  286             ;NY=.98291056*NCRDV-------THE SAME ERROR EXSITS
  287  190 480EFF LDA NCRDV,NY,NOP  ;NCRDV HAS NOW THE LATEST RUNDOWN VALUE FOR NEGATIVE PEAKS
  288  191 4000EF NOP
  289             END
```

SYMBOL:	VALUE:
OUT2←P0	0
TEMP	0
OUT1←P0	1
OUT0←P0	2
INPUT	3
IN0←P0	4
IN0←P1	5
IN0←P2	5
IN0←P3	5
IN0←P4	5
IN0←P5	5
OUT2←P1	0
OUT1←P1	6
OUT0←P1	7
OUT2←P2	0
OUT1←P2	8
OUT0←P2	9
BITA	10
OUT2←P3	0
OUT1←P3	11
OUT0←P3	12
OUT2←P4	0
OUT1←P4	13
OUT0←P4	14
BITB	15
OUT2←P5	0
OUT1←P5	16
OUT0←P5	17
OUTPUT	18

```
NEGVAL                          19
CEE                             20
SAVE                            21
BEE                             22
AYE                             23
FLAG                            24
PEAK                            25
NPEAK                           26
PPEAK                           27
PSTORE                          28
PCRDV                           29
PINFO                           30
POSPK                           31
NSTORE                          32
NCRDV                           33
NINFO                           34
NEGPK                           35
PY                              36
NY                              37

ASSEMBLY COMPLETE
ERRORS     =     0
WARNINGS   =     0
RAMSIZE    =    38
ROMSIZE    =   192
```

APPENDIX C


```
LOC  OBJ            LINE        SOURCE STATEMENT

                      1 ;*****************************************************************************
                      2 ;                    PROGRAM FOR FINAL COMPUTATION OF THE PITCH PERIOD
                      3 ;*****************************************************************************
                      4 ;THIS PROGRAM IS USED FOR THE FINAL COMPUTATION OF THE PITCH PERIOD
                      5 ;OF THE PARALLEL PROCESSING PITCH PERIOD ESTIMATOR.
                      6 ;THE MAIN PROGRAM IS USED TO SET THE INTERRUPT MASK AND DISPLAY THE PITCH
                      7 ;PERIOD COMPUTED ONTO THE WORK-STATION SCREEN.
                      8 ;      THE ISS IS INVOKED EACH TIME A RST 7.5 INTERRUPT IS RECEIVED. IT IS ESSENT
                      9 ;-IALLY BROKEN INTO TWO PARTS, EACH PART EXECUTED ON ALTERNATE INTERRUPTS.
                     10 ;THE FIRST PART:
                     11 ;       THIS PART INITIALISES THE TABLE TO OFFH IN ALL LOCATIONS. THE READ
                     12 ;COUNTER VIZ "CTRD" IS SET TO 1 SO THAT NEXT TIME AROUND THE INTERRUPT IS
                     13 ;SERVICED BY THE SECOND PART. THE RESET STATUS IS CHECKED IN THE "RSTWRD"
                     14 ;AND APPROPRIATE LOCATIONS ARE ACCORDINGLY FILLED.
                     15 ;THE SECOND PART:
                     16 ;       IN THIS PART THE LATEST ESTIMATES OF THE PITCH PERIOD ARE ACQUIRED
                     17 ;AND THE TABLE IS COMPLETED. THEN THE PROCESSING IS PERFORMED TO ELECT THE
                     18 ;MOST POPULAR CANDIDATE ,FROM THE LATEST FOUR ESTIMATES. THE CRITERIA TO
                     19 ;BE SATISFIED ARE:
                     20 ;            a)A CANDIDATE POLLS AT LEAST FOUR VOTES BASED ON THE INEQUALITY
                     21 ;        !PC-PI!<1/8 PI.
                     22 ;            b)NOT MORE THAN ONE CANDIDATE INDICATES A RESET HAD OCCURED
                     23 ;        IN THE CURRENT ESTIMATE, INDICATING, THAT A PERIOD IN EXCESS OF 16
                     24 ;        MILLISECONDS HAS OCCURED.
                     25 ;       FAILING THE ABOVE TESTS, A "HISS" DECISION IS MADE. ELSE THE PITCH
                     26 ;PERIOD APPEARS ON THE WORKSTATION SCREEN, UNDER CONTROL OF THE MAIN PROGRAM.
                     27 ;
                     28 ;
                     29 ;************************ MAIN PRGRAM ****************************
                     30
                     31
4000                 32          ORG 4000H
4000 3E1B            33          MVI A,1BH
4002 30              34          SIM
4003 211840          35          LXI H,ISS75
4006 221958          36          SHLD 5819H
4009 3EC3            37          MVI A,0C3H
400B 321858          38          STA 5818H
400E 3E00            39          MVI A,00H
4010 320C50          40          STA CTRD        ;INITIALISE READ COUNTER
4013 FB              41          EI              ;THIS PREPARES THE PROGRAM FOR RST7.5
4014 00              42 WASTE:   NOP
4015 C31440          43          JMP WASTE       ;WASTE TIME TILL NEXT INTERRUPT ARRIVES
                     44 ;
                     45 ;
                     46 ;******************** I S S ********************************************
                     47 ;
4018 F5              48 ISS75:   PUSH PSW
4019 C5              49          PUSH B
401A D5              50          PUSH D
401B E5              51          PUSH H
401C 3A0C50          52          LDA CTRD
401F FE01            53          CPI 01H
4021 CA7840          54          JZ READ2        ;GO TO SECOND PART AT 2nd RST7.5
```

```
LOC  OBJ          LINE        SOURCE STATEMENT

4024 DA2740         55          JC READ1        ;SERVICE FIRST PART AT 1st RST7.5
                    56 ;
                    57 ;
4027 3E01           58 READ1:   MVI A,01H
4029 320C50         59          STA CTRD        ;SET READ COUNTER TO 1
402C 210050         60          LXI H,5000H
402F 3EFF           61 INIT:    MVI A,0FFH
4031 77             62          MOV M,A
4032 2C             63          INR L
4033 3E0C           64          MVI A,0CH
4035 AD             65          XRA L
4036 C22F40         66          JNZ INIT        ;ALL TABLE LOCATIONS SET TO OFFH
                    67 ;
                    68 ;
4039 DB00           69 CONTIN:  IN FIVE
403B E6AA           70          ANI 0AAH
403D 320E50         71          STA RSTWRD      ;RESET STATUS IS OBTAINED
4040 E602           72          ANI 02H         ;TEST FOR A RESET
4042 C24A40         73          JNZ FILL22      ;DO NOT BOTHER TO READ IF RESET
4045 DB80           74          IN ONE
4047 320150         75          STA P12         ;IF NO RESET READ IN PITCH OF ONE
404A 3A0E50         76 FILL22:LDA RSTWRD
404D E620           77          ANI 20H
404F C25740         78          JNZ FILL32
4052 DBA0           79          IN TWO
4054 320450         80          STA P22         ;READ IN TWO
4057 3A0E50         81 FILL32:LDA RSTWRD
405A E680           82          ANI 80H
405C C26440         83          JNZ FILL42
405F DBC0           84          IN THREE
4061 320750         85          STA P32
4064 3A0E50         86 FILL42:LDA RSTWRD
4067 E608           87          ANI 08H
4069 C27140         88          JNZ EXIT1
406C DB60           89          IN FOUR
406E 320A50         90          STA P42
                    91 ;
                    92 ;
4071 E1             93 EXIT1:   POP H
4072 D1             94          POP D
4073 C1             95          POP B
4074 F1             96          POP PSW
4075 20             97          RIM
4076 FB             98          EI
4077 C9             99          RET
                   100 ;
                   101 ;
                   102 ;********************* SECOND PART *********************
                   103 ;
                   104 ;
4078 3E00          105 READ2:   MVI A,00H
407A 320C50        106          STA CTRD        ;RESET READ COUNTER FOR NEXT RST7.5
                   107 ;
407D DB00          108 HSTST:   IN FIVE
407F E6AA          109          ANI 0AAH
```

```
LOC  OBJ          LINE        SOURCE STATEMENT

4081 OF            110          RRC              ;CATERS FOR SUBSEQUENT RAL'S
4082 320E50        111          STA RSTWRD
4085 010000        112          LXI B,0000H
4088 0C            113 RPT   :  INR C
4089 57            114          MOV D,A
408A 79            115          MOV A,C
408B EE05          116          XRI 05H
408D CA9D40        117          JZ LEAVE
4090 7A            118          MOV A,D
4091 17            119          RAL
4092 17            120          RAL
4093 DA9940        121          JC COUNT
4096 C38840        122          JMP RPT
4099 04            123 COUNT:   INR B
409A C38840        124          JMP RPT
409D 3E02          125 LEAVE:   MVI A,02H
409F B8            126          CMP B
40A0 CAF141        127          JZ HISS
40A3 DAF141        128          JC HISS
                   129 ;
                   130 ;
40A6 210150        131 ROW3RD:  LXI H,P12
40A9 3A0E50        132          LDA RSTWRD
40AC 07            133          RLC              ;TO UNDO LAST RRC IN HSTST
40AD 320E50        134          STA RSTWRD
40B0 E602          135          ANI 02H
40B2 C2C140        136          JNZ FILL21
40B5 DB80          137          IN ONE
40B7 320050        138          STA P11
40BA 86            139          ADD M
40BB DAC140        140          JC FILL21
40BE 320250        141          STA P13          ;IST AND 3RD ROW VALUES ARE FILLED
40C1 210450        142 FILL21:  LXI H,P22
40C4 3A0E50        143          LDA RSTWRD
40C7 E620          144          ANI 20H
40C9 C2D840        145          JNZ FILL31
40CC DBA0          146          IN TWO
40CE 320350        147          STA P21
40D1 86            148          ADD M
40D2 DAD840        149          JC FILL31
40D5 320550        150          STA P23
40D8 210750        151 FILL31:  LXI H,P32
40DB 3A0E50        152          LDA RSTWRD
40DE E680          153          ANI 80H
40E0 C2EF40        154          JNZ FILL41
40E3 DBC0          155          IN THREE
40E5 320650        156          STA P31
40E8 86            157          ADD M
40E9 DAEF40        158          JC FILL41
40EC 320850        159          STA P33
40EF 210A50        160 FILL41:  LXI H,P42
40F2 3A0E50        161          LDA RSTWRD
40F5 E608          162          ANI 08H
40F7 C20641        163          JNZ PRESET
40FA DB60          164          IN FOUR
```

```
LOC  OBJ          LINE        SOURCE STATEMENT

40FC 320950        165          STA P41
40FF 86            166          ADD M
4100 DA0641        167          JC PRESET
4103 320B50        168          STA P43
4106 1E05          169 PRESET:  MVI E,05H
4108 3E00          170          MVI A,00H
410A 320F50        171          STA CTRP11
410D 321050        172          STA CTRP21
4110 321150        173          STA CTRP31
4113 321250        174          STA CTRP41
                   175 ;
                   176 ;
4116 1D            177 SELECT:  DCR E
4117 CAA641        178          JZ COMPAR
411A 7B            179          MOV A,E
411B FE01          180          CPI 01H
411D CA2F41        181          JZ VOTE1
4120 FE02          182          CPI 02H
4122 CA3C41        183          JZ VOTE2
4125 FE03          184          CPI 03H
4127 CA4241        185          JZ VOTE3
412A FE04          186          CPI 04H
412C CA4841        187          JZ VOTE4        ;THE APPROPRIATE CANDIDATE IS CHOSEN
                   188 ;
                   189 ;
412F 3A0050        190 VOTE1:   LDA P11
4132 47            191 LOOP1:   MOV B,A         ;STORE CANDIDATE IN REG B
4133 0F            192          RRC
4134 0F            193          RRC
4135 0F            194          RRC
4136 E61F          195          ANI 1FH
4138 57            196          MOV D,A
4139 C34E41        197          JMP ELECT       ;COMPUTE ONE EIGHTH OF PXX
                   198 ;                         AND PUT IT IN REG D
                   199 ;
413C 3A0350        200 VOTE2:   LDA P21
413F C33241        201          JMP LOOP1
4142 3A0650        202 VOTE3:   LDA P31
4145 C33241        203          JMP LOOP1
4148 3A0950        204 VOTE4:   LDA P41
414B C33241        205          JMP LOOP1
                   206 ;
                   207 ;
414E 210050        208 ELECT:   LXI H,5000H
4151 7E            209 LOOP2:   MOV A,M
4152 90            210          SUB B           ;REG B HOLDS VALUE OF PXX FROM LOOP1
4153 DA6441        211          JC NEGTVE       ;FOR NEGATIVE RESULTS OF SUB OPERATION
4156 BA            212 TEST:    CMP D
4157 DA6941        213          JC SCORE        ;CY INDICATES DIFF<ONE EIGHTH PXX
415A 23            214 SUBLP:   INX H           ;TO CHECK IF ALL TWELVE HAVE BEEN CHECKED
415B 3E0C          215          MVI A,0CH
415D AD            216          XRA L
415E CA1641        217          JZ SELECT       ;TO POLL THE NEXT CANDIDATE
4161 C35141        218          JMP LOOP2
                   219 ;
```

```
LOC  OBJ            LINE        SOURCE STATEMENT

                     220 ;
4164 2F              221 NEGTVE: CMA
4165 3C              222         INR A
4166 C35641          223         JMP TEST
                     224 ;
                     225 ;
4169 7B              226 SCORE:  MOV A,E
416A FE01            227         CPI 01H
416C CA7E41          228         JZ SCORE1
416F FE02            229         CPI 02H
4171 CA8841          230         JZ SCORE2
4174 FE03            231         CPI 03H
4176 CA9241          232         JZ SCORE3
4179 FE04            233         CPI 04H
417B CA9C41          234         JZ SCORE4
417E 3A0F50          235 SCORE1: LDA CTRP11
4181 3C              236         INR A
4182 320F50          237         STA CTRP11
4185 C35A41          238         JMP SUBLP
4188 3A1050          239 SCORE2: LDA CTRP21
418B 3C              240         INR A
418C 321050          241         STA CTRP21
418F C35A41          242         JMP SUBLP
4192 3A1150          243 SCORE3: LDA CTRP31
4195 3C              244         INR A
4196 321150          245         STA CTRP31
4199 C35A41          246         JMP SUBLP
419C 3A1250          247 SCORE4: LDA CTRP41
419F 3C              248         INR A
41A0 321250          249         STA CTRP41
41A3 C35A41          250         JMP SUBLP      ;ALL 4 CTRS HAVE COINCIDENCE SCORES
                     251 ;
                     252 ;
41A6 3A0F50          253 COMPAR: LDA CTRP11
41A9 FE04            254         CPI 04H
41AB DAB541          255         JC CHKP21      ;DO NOT BOTHER IF CTR<4
41AE 47              256         MOV B,A
41AF 3A0050          257         LDA P11
41B2 320D50          258         STA DECSN      ;TENTATIVELY P11=PERIOD
41B5 3A1050          259 CHKP21: LDA CTRP21
41B8 FE04            260         CPI 04H
41BA DAC841          261         JC CHKP31
41BD B8              262         CMP B
41BE DAC841          263         JC CHKP31      ;IF CTRP21<CTRP11 GO AHEAD
41C1 47              264         MOV B,A        ;IF CTRP21>CTRP11 THEN
41C2 3A0350          265         LDA P21        ;P21 BECOMES THE PERIOD
41C5 320D50          266         STA DECSN
41C8 3A1150          267 CHKP31: LDA CTRP31
41CB FE04            268         CPI 04H
41CD DADB41          269         JC CHKP41
41D0 B8              270         CMP B
41D1 DADB41          271         JC CHKP41
41D4 47              272         MOV B,A
41D5 3A0650          273         LDA P31
41D8 320D50          274         STA DECSN
```

```
LOC  OBJ          LINE         SOURCE STATEMENT

41DB 3A1250        275 CHKP41: LDA CTRP41
41DE FE04          276         CPI 04H
41E0 DAF141        277         JC HISS          ;IF NONE POLLS>4 VOTES A HISS DECISION
41E3 B8            278         CMP B
41E4 DA1342        279         JC EXIT
41E7 47            280         MOV B,A
41E8 3A0950        281         LDA P41
41EB 320D50        282         STA DECSN
41EE C3F941        283         JMP RESULT       ;DECSN NOW HOLDS POPULAR PERIOD
                   284 ;
                   285 ;
41F1 3EFF          286 HISS:   MVI A,0FFH
41F3 320D50        287         STA DECSN
41F6 C3F941        288         JMP RESULT
                   289 ;
                   290 ;
41F9 3A0D50        291 RESULT: LDA DECSN
41FC EEFF          292         XRI 0FFH
41FE CA0D42        293         JZ NOISE
4201 3A0D50        294         LDA DECSN
4204 CDBD03        295         CALL BIHEX
4207 CDC402        296         CALL TWOSP
420A C31342        297         JMP EXIT
420D 010049        298 NOISE:  LXI B,4900H
4210 CD3804        299         CALL PNTMS
4213 E1            300 EXIT:   POP H
4214 D1            301         POP D
4215 C1            302         POP B
4216 F1            303         POP PSW
4217 20            304         RIM
4218 FB            305         EI
4219 C9            306         RET
                   307 ;
                   308 ;
                   309 ;
16D1               310 DELAY EQU 16D1H
500D               311 DECSN EQU 500DH
03BD               312 BIHEX EQU 03BDH
02C4               313 TWOSP EQU 02C4H
0438               314 PNTMS EQU 0438H
500E               315 RSTWRD EQU 500EH
500F               316 CTRP11 EQU 500FH
5010               317 CTRP21 EQU 5010H
5011               318 CTRP31 EQU 5011H
5012               319 CTRP41 EQU 5012H
0080               320 ONE EQU 80H
00A0               321 TWO EQU 0A0H
00C0               322 THREE EQU 0C0H
0060               323 FOUR EQU 60H
0000               324 FIVE EQU 00H
500C               325 CTRD EQU 500CH
5000               326 P11 EQU 5000H
5001               327 P12 EQU P11+1
5002               328 P13 EQU P12+1
5003               329 P21 EQU P13+1
```

```
  LOC  OBJ          LINE        SOURCE STATEMENT

  5004               330 P22 EQU P21+1
  5005               331 P23 EQU P22+1
  5006               332 P31 EQU P23+1
  5007               333 P32 EQU P31+1
  5008               334 P33 EQU P32+1
  5009               335 P41 EQU P33+1
  500A               336 P42 EQU P41+1
  500B               337 P43 EQU P42+1
                     338 END


PUBLIC SYMBOLS

EXTERNAL SYMBOLS

USER SYMBOLS
BIHEX   A 03BD    CHKP21  A 41B5    CHKP31  A 41C8    CHKP41  A 41DB    COMPAR  A 41A6    CONTIN  A 4039    COUNT   A 4099
CTRD    A 500C    CTRP11  A 500F    CTRP21  A 5010    CTRP31  A 5011    CTRP41  A 5012    DECSN   A 500D    DELAY   A 16D1
ELECT   A 414E    EXIT    A 4213    EXIT1   A 4071    FILL21  A 40C1    FILL22  A 404A    FILL31  A 40D8    FILL32  A 4057
FILL41  A 40EF    FILL42  A 4064    FIVE    A 0000    FOUR    A 0060    HISS    A 41F1    HSTST   A 407D    INIT    A 402F
ISS75   A 4018    LEAVE   A 409D    LOOP1   A 4132    LOOP2   A 4151    NEGTVE  A 4164    NOISE   A 420D    ONE     A 0080
P11     A 5000    P12     A 5001    P13     A 5002    P21     A 5003    P22     A 5004    P23     A 5005    P31     A 5006
P32     A 5007    P33     A 5008    P41     A 5009    P42     A 500A    P43     A 500B    PNTMS   A 0438    PRESET  A 4106
READ1   A 4027    READ2   A 4078    RESULT  A 41F9    ROW3RD  A 40A6    RPT     A 4088    RSTWRD  A 500E    SCORE   A 4169
SCORE1  A 417E    SCORE2  A 4188    SCORE3  A 4192    SCORE4  A 419C    SELECT  A 4116    SUBLP   A 415A    TEST    A 4156
THREE   A 00C0    TWO     A 00A0    TWOSP   A 02C4    VOTE1   A 412F    VOTE2   A 413C    VOTE3   A 4142    VOTE4   A 4148
WASTE   A 4014

ASSEMBLY COMPLETE,  NO ERRORS
```

APPENDIX D

2920 SIGNAL PROCESSOR

The 2920 Signal Processor is a single chip microcomputer designed especially to process real time analog signals. It has on board program memory, scratchpad memory, D/A circuitry, A/D circuitry, digital processor, and I/O circuitry. Its capabilities in signal processing are diverse and powerful, and include an extremely broad range of applications as listed in Table D.1.

The pin out and the 2920 block diagram are in Figures D.1 and D.2 respectively. A list of Memory-ALU Instruction Opcodes is in Table D.2. The program memory consists of 192, 24 bit words. The fields allocated in one such instruction word are ALU, DESTINATION, SOURCE, SCALER CODE, ANALOG. This permits simultaneous digital and analog processing in the IC.

D-1 ANALOG OPERATIONS

Under program control, one input may be selected from four possible inputs, and the signal sampled and held. The signal would then be converted to a digital word with up to 9 bits of linear conversion (sign bit and 8 amplitude bits). The bits are formed by a successive approximation A/D conversion and stored in the Digital Analog Register (DAR). The DAR is a register for interface between the analog and digital sections of the 2920. During A/D conversion,

the DAR accumulates each bit of the digital word until conversion is complete. This word may then be loaded into the scratch pad RAM for further processing.

The input signal is sampled by a sequence of IN instructions, the number depending on the clock rate and the value of the external S and H capacitor. Then a sequence of conversion instructions are used to obtain each bit in turn. Lesser IN instructions are needed to sample a digital input level.

D-2 DIGITAL OPERATIONS

The digital part of the 2920 will be operating simultaneously with the above analog operations. For example, during a 9 bit A/D conversion, a 3-Pole low pass filter could be realised using the digital circuitry. The digital loop includes a 2 port addressable 40 word RAM, a binary shifter, and the ALU. Under program control, two 25 bit locations in RAM are simultaneously addressed, with data from the A address passing through the binary shifter. This shifter allows scaling from 2^{2} to 2^{-13}. The scaled A value and the unscaled B value are then propagated to the ALU as operands. The ALU operates on these values with digital instructions specified by the program. The 25 bit result of that operation is loaded into the B address location of the RAM. The entire set of actions (analog operation, dual memory fetch, binary shift, ALU execution and write back to RAM) take place in one instruction time.

D-3 PROGRAM LENGTH AND INSTRUCTION TIME

The EPROM can hold 192 instructions for sequential execution only. The program control goes back to the first instruction automatically at the end of the program which may be 192 instructions long. Shorter programs have to be terminated with an EOP instruction.

The instruction time is calculated from the expression

$$T_{inst} = 4 \times \frac{1}{f}$$ where f = clock frequency to the 2920.

Therefore, the time for one pass through the program is given by

$$T_{prog} = N \times 4 \times \frac{1}{f}$$ where N = program length.

D-4 SAMPLING RATE

In the above context it is pointed out that the sampling rate to sample the input analog signals is decided by the T_{prog}. If an input is sampled only once during one program pass then the sampling frequency is given by

$$f_s = \frac{1}{T_{prog}}$$

However, the sampling rate can be increased by sampling the input more than once during a program pass.

D-5 CONSTANT ARRAY

The constant array consists of 16 psuedo-locations in the RAM address field. These constants are accessed only

from port A, i.e. only as a source operand. Each unscaled constant is a multiple of one-eighth, from -8/8, -7/8 ... to +6/8, +7/8. By passing these constants through the scaler, actually a much larger range of constants are available.

D-6 REFERENCE VOLTAGE

A positive reference voltage has to be provided by the user. The range of acceptable voltages is from +1 to +2 V and is chosen to suit the application. The input and output voltage range is limited to the range of the VREF. The D/A is a multiplying type and the step size (1LSB), is computed as VREF/256. Noise appearing on the VREF pin will be transferred directly to the input and output signals through the D/A. VREF must therefore be noise free.

If digital level signals are to be input or output, the VREF must be greater than +1.5 V.

D-7 INPUTS AND OUTPUTS

The four multiplexed inputs use the same S and H capacitor. As a result the S and H capacitor is to be chosen carefully and the number of **IN** instruction necessary to acquire a sample value should be properly adjusted. The guide lines are as follows:

(a) The S and H circuit impedence is 1.5 K-ohm. For a given C between 100 and 1000 pf we have the RC value. Then use enough IN instructions so that the time for sampling

the input is at least six times this RC, for a 9 bit resolution during A/D conversion.

(b) If the instruction time exceeds 600 ms, as in the present implementation, then a 1000 pf capacitor is required for S and H.

(c) However, if during the program execution, it becomes necessary to sample all four inputs, then a larger number of IN instructions must be used per input to keep down the cross talk levels. Sometimes, there is no scope of using a large number of IN instructions due to program memory restrictions. In such cases, a dummy read can be performed on an input pin that has been grounded (or put at a negative voltage equal to V_{ref} as in this case) to discharge the S and H capacitor prior to reading the desired input.

(d) If the input being read holds only logic levels, then a fewer number of IN instructions and CVT instructions are required to acquire enough of the input signal to make a decision on the logic level. This feature will permit digital inputs to the 2920.

The input A/D scheme of the Processor (Figure D.3) and the fact that the processor uses Two's complement arithmetic, cause a peculiar problem when low frequency sinusoids or positive going signals are being read. The problem is that the value after a positive peak value is read as a zero and this can be avoided by adding a small negative constant to the DAR during A/D conversion, as shown done in Appendix C.

To put out a signal from the Processor, the desired value is placed in the DAR, allowed time to settle and then a number of OUT instructions are executed to allow the output to settle. The eight output pins can all be used as analog or digital outputs or as part analog part digital depending on the voltage levels at the mode pins M_1 and M_2 (Table D.3).

Analog output is done as above. The output signal level is determined by the V_{ref}. The only requirement is that enough OUT instructions should be used to let the output signal value settle. Also while output is going on, the DAR should not be used for any operations.

Digital outputs are made by the following method:

a) The V_{ref} should be $>+1.5$ V.

b) The LIM instruction is used to present a logical one or zero to the DAR for output. Then the usual sequence of OUT instructions are employed.

c) An external pull up resistor to +5 V is to be used at the output pin to enable it to drive TTL logic.

TTL Logic levels that are to be input to the 2920 SIGIN pins must be reduced to the V_{ref} limit by use of a voltage divider.

D-8 OTHER USEFUL OUTPUTS

By using 10 K pull up resistors to V_{cc}, at the $\overline{CCLK}$, $\overline{RST}/\overline{EOP}$, $\overline{OF}$ the signals at these pins can be put to several uses, e.g. cascading 2920's, digital input and output both parallel and serial etc. [21].

In the current implementation, the $\overline{\text{CCLK}}$ output was used to provide a trigger to the XR 2240 timer generating the interrupts.

$\overline{\text{CCLK}}$ is an output clock at 1/16 the frequency of the 2920 clock input.

$\overline{\text{OF}}$ is an output that occurs whenever an overflow occurs in the execution of the program.

$\overline{\text{EOP}}$ indicates the end of the program and the actual program time can be measured as the time between two successive $\overline{\text{EOP}}$ outputs.

2920 SIGNAL PROCESSING APPLICATIONS SOFTWARE

A package for the development of software for 2920 applications is available on the MDS. It consists of three parts:

a) SPAS 20 Compiler

b) AS 2920 Assembler

c) SM 2920 Simulator.

D-9 SPAS 20 COMPILER

This is a very useful software and some of its uses are listed below.

a) Design of filters: Digital filters may be designed effectively using this software support. It is capable of providing frequency response of individual poles both in the S and Z planes. Phase plots are possible for the above. Frequency response for pole-zero combinations in cascade or

parallel are also provided. This helps in manipulation of the poles/zeroes to derive filters with desired response. Macros may be included to obtain pole/zeroes of Butterworth and Chebyshew filters on specifying the filter characteristics.

In the present implementation, this package was used to study the responses of the individual complex pole pairs. Then the responses were summed in parallel to obtain the characteristics for the implemented Lerner filters.

All poles in the S plane can be transformed to the Z plane, by the Matched Z or Bilinear transformations. The response of the Z plane singularities can now be compared with that of the S plane and necessary adjustments made. During transformation by the Bilinear transform, additional zeroes are automatically evaluated by the compiler.

In the implementation of the Lerner filters since IIR filters are needed, the Matched Z transform has been used.

b) Coding of poles/zeroes: The filter coefficients B_0, B_1 (Figure D.4) are computed and the 2920 instruction code is produced by a single code command. The user must specify the number of instructions and the error bounds for coding each singularity. The number of instructions that may be allowed for such coding depends on the available program length. There are macros which can create the code for cascaded poles, avoiding intermediate overflows and finally advising the input scaling required. Zeroes are

separately coded and appended appropriately.

c) A/D conversion: By providing information of the Sigin pin to be used, a macro can be used to generate an A/D conversion code which can be saved in a separate file and merged with the other instructions subsequently. It is easy to follow the use of this compiler through one run of the print out in the 2920 Signal Processor Applications Software/Compiler User's Guide [22].

D-10 AS 2920 ASSEMBLER

The AS 2920 assembler can be called upon to assemble the contents of a source file into object code for the 2920. The assembler's main features are:

a) Assemble the 2920 assembly language instructions into object code.

b) In this process it lists errors such as syntax, illegal instruction sequences etc.

Some examples of illegal sequences are:

1) A LDA DAR, XX instruction immediately following a IN or CVT instruction.

2) ECP instruction is not at a location divisible by four

and so on.

Error lists are available in the Assembly Language Manual.

D-11 SM 2920 SIMULATOR

The simulator loads, the specified object file for execution and is a very important tool for software development. The Simulator duplicates precisely the working of the 2920. Software control is provided by the Simulator in the following manner:

a) Trace collection - The contents of any of the 40 RAM locations and input/output values can be traced once every pass or always by setting the Qualifier.

b) Time for execution of one pass of the program can be specified. This automatically sets the instruction time and sampling rate. Varying this, it is easy to study filter response changes for varying sampling rates.

c) The trace data collected can be viewed either in tabular format or graphically by use of the Graph On command.

d) All through simulation, a time record is kept for trace collection and computation of time dependent input functions, which may have been defined as inputs.

e) Under simulator control, ROM locations may be altered and the final program saved by use of the SAVE command.

A typical Simulator Design would follow a sequence as below:

1) Invoke simulator
2) Load Hex file of program to be simulated
3) Set the trace qualifier
4) Indicate inputs/outputs/RAM locations to be traced

5) Specify input function

6) Check that TPROG and TINST (Read only) are set to desired values

7) "Console off" command prevents data from trace buffer being displayed and speeds up simulation

8) Simulate with break points

9) Call up trace data

10) Examine ROM/RAM contents and modify any ROM location

11) Simulate with modified ROM locations

12) Save final program for burning the EPROM.

TABLE D-1

Signal Processing Functions of 2920

- FILTERING
  - -Complex poles & zeroes
  - -Digital filters
- NONLINEAR FUNCTIONS
  - -Limiters
  - -Comparators
- PROCESSING
  - -Phase locked loops
  - -Adaptive filters
- WAVEFORM GENERATION
  - -Arbitrary waveforms
  - -Wide freq range
- MODULATION/DEMODULATION
  - -Amplitude, Freq & Phase modulation

TABLE D-2

Memory-ALU Instruction Opcodes

Non-conditional Arithmetic

XOR,
AND
LIM
ABS
APA
ADD
SUB
LDA

Conditional Arithmetic Operations

ADD, LDA, SUB } Bit tested DAR(n) by CND(n)
or
Sign tested by CNDS for -ve

Overflow Manipulation

ABA XXX,YYY,CND(k) - Disable
XOR XXX,YYY,CND(k) - Enable
EOP - Enable

TABLE D-3

Output Mode for Sigout Pins as Functions of M1 & M2

M1	M2	Sigout Pins
5v	5v	0-7 Analog
5v	-5v	0-3 Analog, 4-7 TTL
-5v	5v	0-3 TTL, 4-7 Analog
-5v	-5v	0-7 TTL

PIN DESCRIPTIONS (RUN MODE)

Symbol	Function
SIGOUT	8 pins corresponding to the 8 demultiplexed analog outputs (0-7).
GRDA	Analog signal ground held at or near GRDD typically.
CAP_1 & CAP_2	External capacitor connections for the input signal sample and hold circuit.
VREF	Input Reference Voltage.
SIGIN	4 pins corresponding to the 4 multiplexed analog inputs (0-3).
V_{BB}	Most negative power pin set at -5 volts during run mode (different voltage in program mode).
X1/CLK	Clock input when using external clock signals, oscillator input for external crystal when using internal clock.
X_2	Oscillator input for external crystal when using internal clock.
GRDD	Digital ground.
V_{CC}	5 volts in run mode.
$\overline{CCLK}$	Internal fetch cycle clock output. The falling edge designates the START of a new PROM fetch cycle. $\overline{CCLK}$ is 1/16 of X1/CLK rate.
RUN/$\overline{PROG}$	Mode control tied to GRDD in run mode (different voltage in program mode).
$\overline{RST}$/$\overline{EOP}$	Low $\overline{RST}$ input initializes program fetch counter to first location. As an output it signifies EOP instruction present (open drain, active low).
$\overline{OF}$	Indicates an overflow in the current ALU operation (open drain, active low).
VSP	EPROM power Pin 9 volts for RUN mode (Different voltage in program mode).
M1, M2	Two pins which specify the output function of the SIGOUT pins (see Table 6).

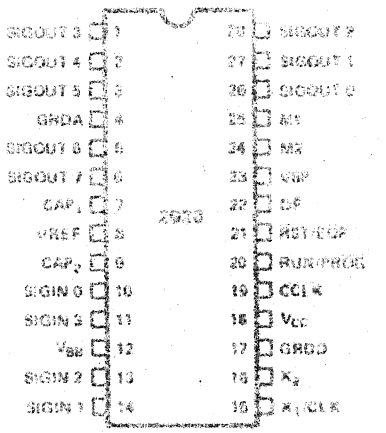

Run Mode Pin Configuration.

PIN DESCRIPTIONS (PROGRAM MODE)

Symbol	Function
D0,D1,D2,D3	4 pins carrying EPROM program data for both input and output (open drain, active low output; active high input).
V_{BB1}, V_{BB2}, V_{BB3}	Digital ground in PROGRAM mode (different voltage for RUN mode).
V_{SS1}, V_{SS2}, V_{SS3}	+5 volts in PROGRAM mode (function changes for RUN mode).
RUN/$\overline{PROG}$	Mode control pin tied to V_{BB} for PROGRAM mode (voltage changes for RUN mode).
$\overline{INCR}$	Input pulse increments the nibble (4 bits) counter in PROG mode (function changes in RUN mode).
VSP	EPROM power pin +5 volts for VERIFY mode and +25 volts for PROGRAM mode (different voltage in RUN mode).
PROG/$\overline{VER}$	Controls EPROM bi-directional data bus for verify (low) or program (high).
$\overline{RST}$	Input pulse resets nibble counter to position zero for start of programming.

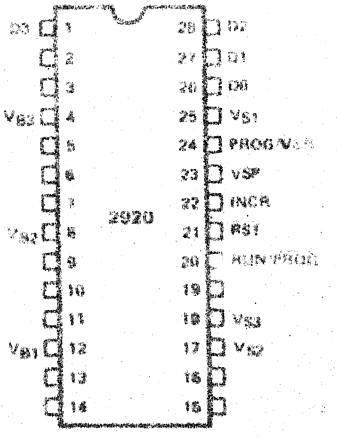

Program Mode Pin Configuration.

Figure D.1 2920 Pin Descriptions

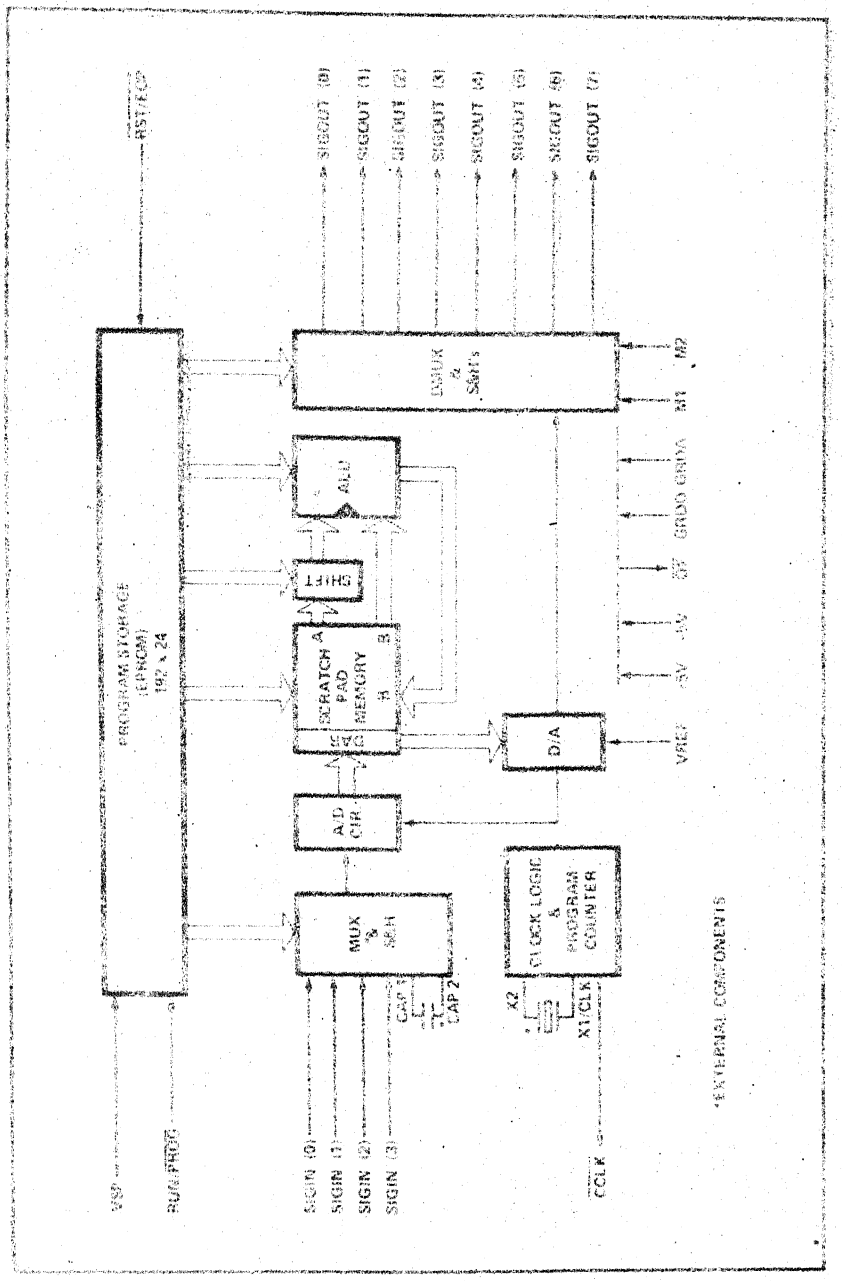

Figure 0.2 2920 Block Diagram

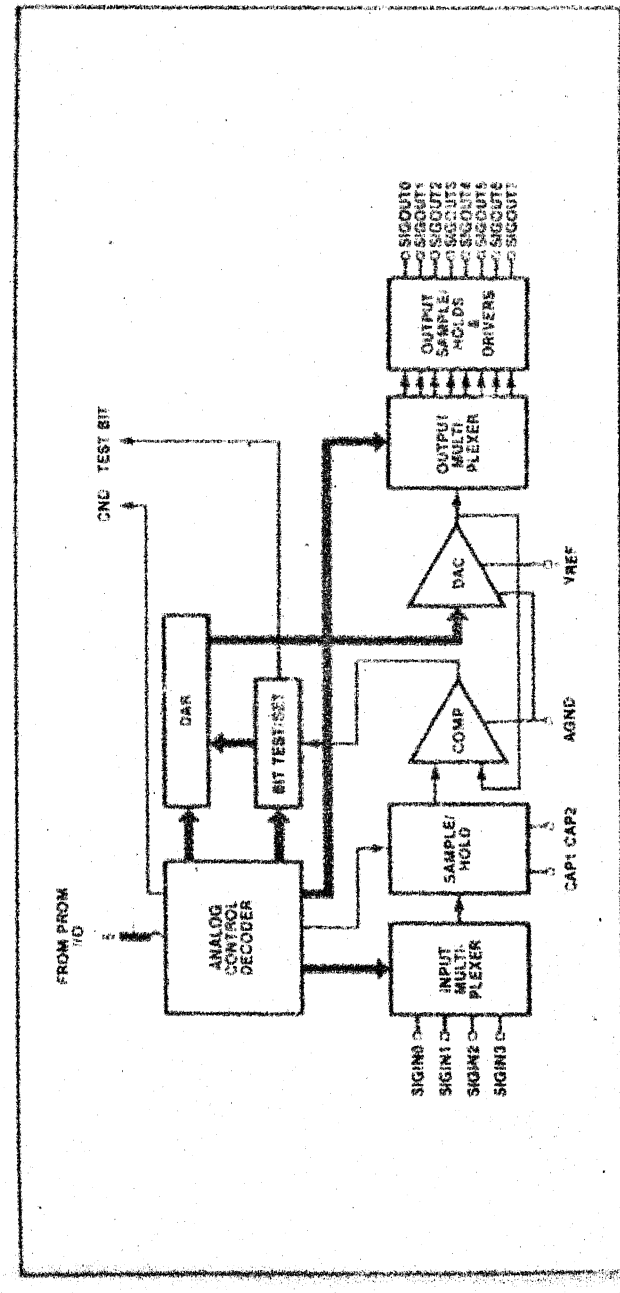

Figure D.3 Analog Section Block Diagram

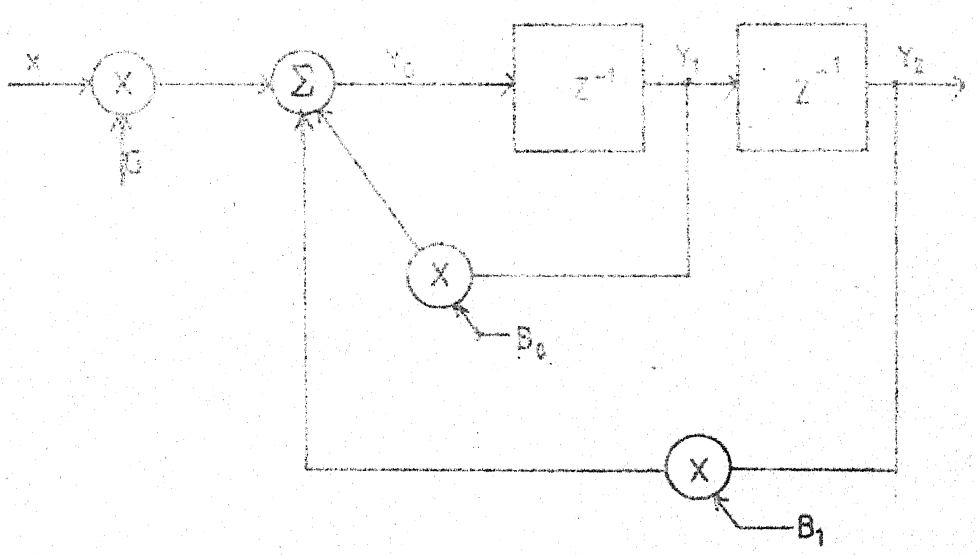

$B_0 = 2e^{-\sigma T}\cos(wT)$ $\qquad$ $B_1 = -e^{-2\sigma T}$

where σ = real part of pole
w= imaginary
T= sample period

Fig D.4 Realisation of a single complex pole-pair